

RoHS

NOTES:





- 1.Rated voltage : 250V(Max)
- 2.Current Rating: 3.0 AMP (Max.)
- 3.Contact Resistance: 30mΩ (Max.)
- 4.Withstanding voltage : 1000V AC/Minute
- 5.Insulation Resistance: 1000MΩ (Min)
- 6.Operation Temperature: -40℃ to +105℃

MATERIAL:

- 1.Housing : PBT (UL94V-0)
- 2.Contact : Copper Alloy, Au/Sn over Ni Plating
- 3.Shell : Steel, Ni Plated
- 4.Screw : SWRCH, Ni Plated
- 5.Harpoon : Copper Alloy, Tin Plated

Ordering Information

6235-02	F	25	XX	S	X	A	XX
Connector Type	No.of Pins	Contact	Plating	Color	Packing	Serial code	
F=Female M=Male	9,15, 25,37P	S0:Gold Flash/Tin G0:Gold Flash G2:2u" Gold G3:3u" Gold G4:5u" Gold		B=Black W=White U=Blue	A=Tray		

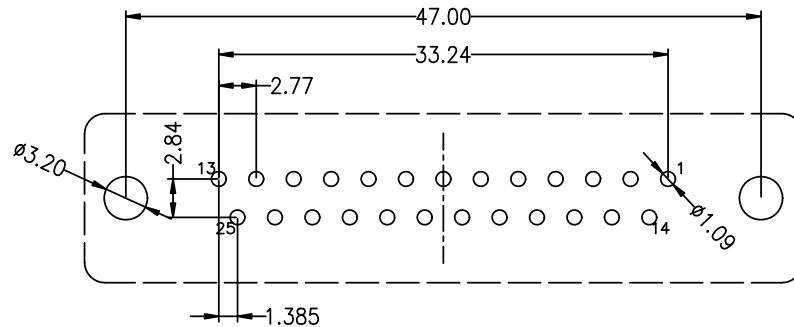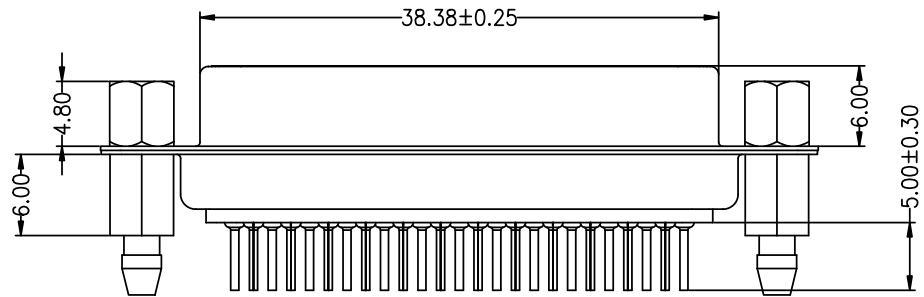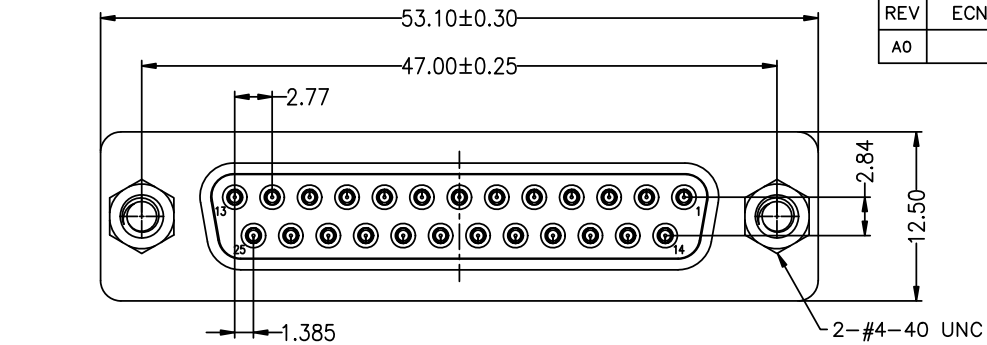

Recommended P.C.B Layout

Top View

Tolerance: ±0.05mm

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW	R.Q	2021.12.15

DRAW		OPERATION		SCALE	FIT	JILN ® 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO.,LTD	
		X.X	±0.30	UNIT	mm		
CHECK		X.XX	±0.20	SIZE	A4	PART NO.	6235-02F25XXSXAXX
		X.XXX	±0.10	SHEET	1/1	TITLE:	DP-25P母/鲫鱼叉锁螺丝
APPROVE		Angle	±3°	PROJ.			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Standard Connectors](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[015-0341-000](#) [015-0349-000](#) [015-0350-000](#) [015-8755-001](#) [017041-0005](#) [021-0144-011](#) [609-25P](#) [609-9P](#) [CT0U22-14PSA206F127](#)
[CT1T14S-9SS](#) [CT2-22-19SC](#) [CT6-10SL-4SC](#) [CT6-20-15SSA232](#) [CT6-22-10PS](#) [CT6E14SA7SC](#) [CT6ST02-16-11SS](#) [6STD15SCT99S40X](#)
[6STF09PCM05B70X](#) [7-135760-9](#) [MD1-21PS](#) [MDM-15SCBRM7-F222](#) [MDM96521-744](#) [MDVB1-21SL1](#) [MDVB1-9SCBRP](#)
[FDL1XSRAA52X](#) [MIK0-1-7SH003](#) [MIKQ6-7SH076](#) [MIKQ7-7PH077](#) [MIKQ7-7PH11](#) [MIKQ7-7PH32](#) [MJSB-26PH003](#) [MJSV-28SL61](#)
[PG-KV/PV-16-GROM-SEALING](#) [GDA15P](#) [GDAY15PB](#) [980-0000-587](#) [980-0000-761](#) [980-2001-490](#) [980-2001-492](#) [990-0000-785](#) [990-0000-788](#) [995-0001-966](#) [995-2000-075](#) [120190-0184](#) [120-5143-011](#) [120-1840-000](#) [120-1841-000](#) [120190-0111](#) [120190-0214](#) [120-8551-102](#)