

SPECIFICATIONS







Rated (额定参数) : 300V, 8A
Dielectric strength (抗电强度) : AC2000V/1 Minute
Insulation Resistance (绝缘电阻) : 1000MΩ Min
Contact Resistance (接触电阻) : 20mΩ Max
Wire Range (线径) : 28~12AWG
Strip length (剥线长度) : 5~8mm
Temp. range (操作温度) : -40℃~+105℃
MAX Soldering (瞬时温度) : +250° C, 5s

Housing Material (塑件) : PA66 (UL94 V-0)
Contact (端子) : Brass, Tin plating (黄铜镀锡)
Clamp (方块) : Brass (黄铜), Ni plating (镀镍)
Screw (螺丝) : M2.0, Steel, Tin plating (钢, 镀镍)

PITCH RANGE		NOMINAL DIMENSION RANGE					
IN MM		IN MM		IN MM		IN MM	
OVER	6	OVER	10	OVER	30	OVER	60
TO	6	TO	10	TO	30	TO	100
6	10	24	30	60	100	150	OVER
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00

Ordering Information

JL15EDGKR-381 XX G 01

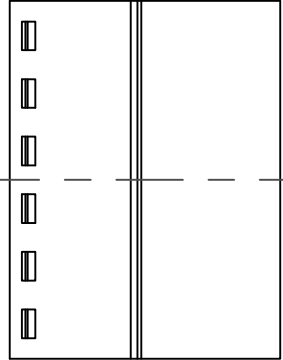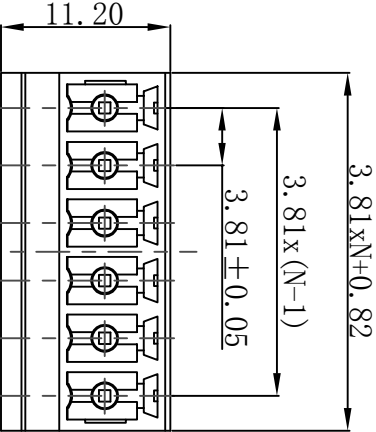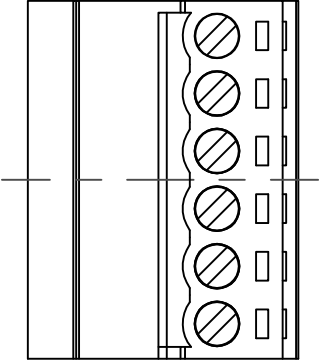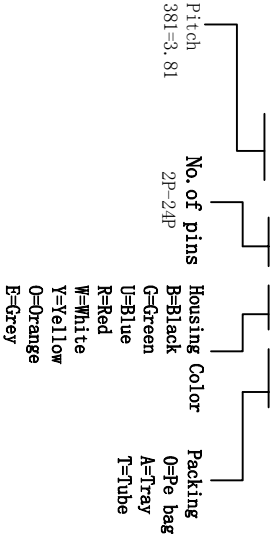

DRAW	SHUANG PING ZHENG		SCALE	FIT	JIN ® 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO., LTD	
CHECK	LICHAO LIU	UNIT	mm			
APPROVE	YONGLIANG GAO	SIZE	A4			
		SHEET	1/1			
		PROJ.		PART NO.		JL15EDGKR-381XXG01
				TITLE:		JL15EDGKR-3.81-XXP插拔式母座/绿色

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[57.510.0053](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [734-104](#) [734-302](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP03-3,50](#) [PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFT07250](#) [ELVD12100](#) [ELVF09400](#) [ELVP03100](#) [ELXH071G0E](#) [1700410](#) [1702246](#) [1705229](#) [1714537](#) [1717806](#) [1719600](#) [1728941](#) [1734692](#) [1734795](#) [1740291](#) [1740628](#) [1746952](#) [1750207](#) [1752865](#) [1754115](#) [1754144](#) [1756913](#) [1760051](#) [1760336](#) [1765111](#) [1776388](#) [1777701](#) [1783410](#) [1800227](#) [1801080](#) [1809474](#)