

1

2

3

4

5

6

7

8

9

10



RoHS

MAPX

MODIFICATION





DRW

DATE

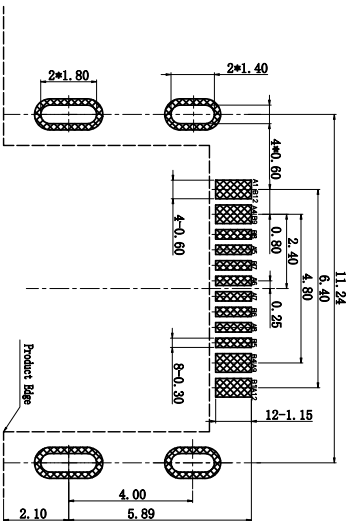

RECOMMENDED PCB LAYOUT  
TOLERANCE UNSPECIFIED ±0.05mm

- 备注:
- 1.材料:
    - 1.1.胶芯: LCP+30%G.F
    - 1.2.端子: C2680-H, T=0.15mm; 镍底, 镀金1U"
    - 1.3.外壳: S1S201-1/2H, T=0.30mm; 整体镀镍
    - 1.4.中夹片: S1S201-1/2H, T=0.15mm
  - 2.主要特性:
    - 2.1.额定电流: 3A
    - 2.2.接触阻抗: 40mΩ MAX
    - 2.3.绝缘阻抗: 100MΩ MIN 250V DC
    - 2.4.耐压测试: 100V AC
    - 2.5.沾锡性: 温度250±5℃, 时间5±0.5s
    - 2.6.整体插入力: 2.0kgf MAX
    - 耐久前整体拔出力: 0.8kgf MIN
    - 2.7.使用寿命: 10000次
    - 2.8.工作温度: -30℃~+80℃

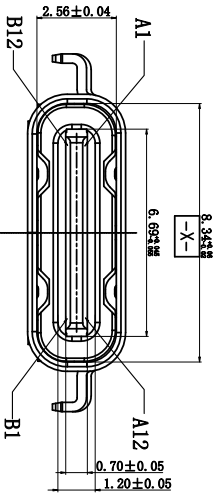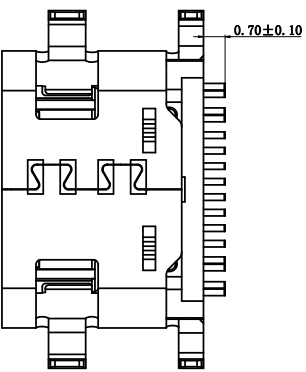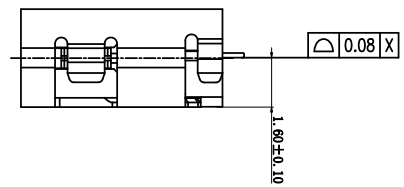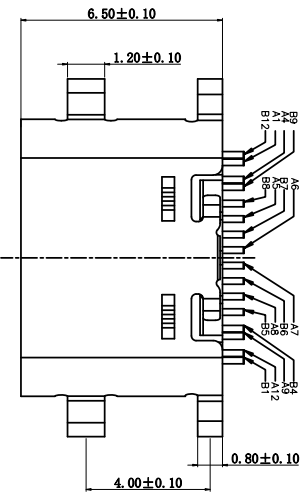

Pin	Signal Name	Description	Pin	Signal Name	Description
A1	GN0	Ground return	B12	GN0	Ground return
A2	SST01	Positive half of first SuperSpeed TX differential pair	B11	SST01	Positive half of first SuperSpeed RX differential pair
A3	SST01	Negative half of first SuperSpeed TX differential pair	B10	SST01	Negative half of first SuperSpeed RX differential pair
A4	Vns	Bus Power	B9	Vns	Bus Power
A5	CC1	Configuration Channel	B8	S002	Standalone Use (S00)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dp2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	S001	Standalone Use (S00)	B5	CC2	Configuration Channel
A9	Vns	Bus Power	B4	Vns	Bus Power
A10	SST02	Negative half of second SuperSpeed RX differential pair	B3	SST02	Negative half of second SuperSpeed TX differential pair
A11	SST02	Positive half of second SuperSpeed RX differential pair	B2	SST02	Positive half of second SuperSpeed TX differential pair
A12	GN0	Ground return	B1	GN0	Ground return

产品图  
PRODUCT CHART DWG

深圳市精拓金电子有限公司  
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

公差一览表		单位		制图		制料号	
TOLERANCE UNLESS OTHERWISE	±5.°	UNITS	MM	DRAWING	L-S-S	PRODUCT PART NO.	918-418K2024S40025
X	±0.35	X	±5.°	比例	1:1	审核	郭治富
XX	±0.25	.X	±2.°	SCALE	.XX	核准	黄国荣
XXX	±0.20	.XX	±1.°	日期	2021-03-10	角法	VER
	±0.05	.XXX	±0.5°	DATE		版本	A0

您正在使用 ZWCAD2022 个人版, 不得用于商业用途, 详情请咨询4007-182-5884

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [USB Connectors](#) category:*

*Click to view products by [Jing](#) manufacturer:*

Other Similar products are found below :

[950](#) [A-USB A-LP-SMT-C](#) [A-USB B-TOP-C](#) [MUSBD11135](#) [17-200721](#) [217450-1](#) [KMBVX-TH-5S-B30](#) [KUSBX-AS2N-W](#) [KUSBX-SMT2AP1S-B30](#) [KUSBX-SMT2AP1S-W30](#) [935](#) [30-498-6](#) [SK-60A-2](#) [30-470](#) [30-489](#) [30-541](#) [MIKROE-1451](#) [1-1734084-2](#) [10135326-001LF](#) [USB3FTV7APEG](#) [4198](#) [17-200011](#) [1040870124](#) [2274475-3](#) [914-614A2025S10200](#) [MUSBR-AHD2-M41-SK](#) [GSB3116344HR](#) [GSB343K331HR](#) [USB3FTV2SAZNF459](#) [USBF21GSCC](#) [U221-041N-1WVS62-F5D](#) [HYCW153-USBD05-500B](#) [HYCW219-USBD05-075B](#) [HYCW148-USBD05-117B](#) [HYCW149-USBD05-740B](#) [HYCW204-USBD05-108B](#) [HYCW214-USBA04-113B](#) [HYCW213-USBA04-113B](#) [KMMX-BSMT35S-1-B30TR](#) [GT-2A001F-CGNG1](#) [GT-USB-7010ES01](#) [GT-USB-7010i](#) [HC-ST-003-07-J](#) [918-418K2022Y40028](#) [920-462A2021Y10104](#) [AF 90° WJDG ZB](#) [TYPE-C 6P LCH10.5](#) [MICRO 7.2ZB5.0](#) [AM 180°](#) [MINI 5PTP-GZ](#)