

1

2

3

4

5

6

7

8

9

10




MAPX

MODIFICATION

DRW

DATE

COVER

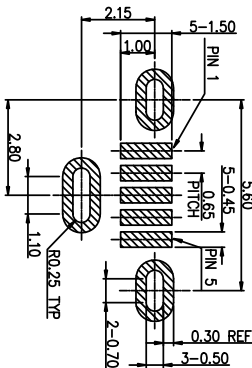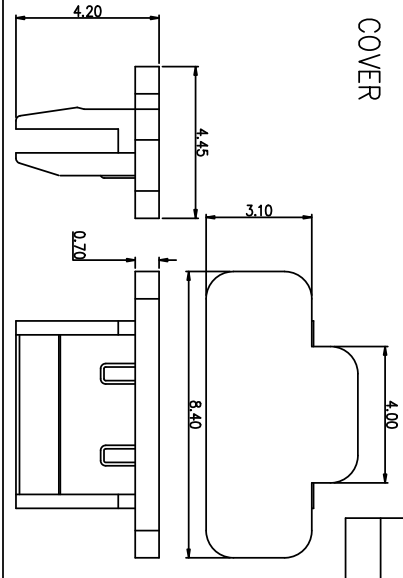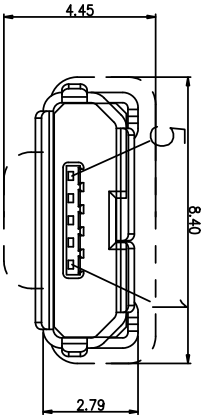

RECOMMEND PCB LAYOUT(THICKNESS=1.6mm)
TOLERANCE: ±0.05


Notes:

Specifications:

1. Current rating: 1 A Max.
2. Dielectric withstanding:voltage: 100V(AC) for 1 min.
3. Contact resistance: 50m Max.
4. Insulation resistance: 100M Min.
5. Total mating force: 3.57 Kgf Max.
6. Total unmating force: 1.0 Kgf Min.0.81~2.05 Kgf Min.after 10000 insertion/extraction cycles
7. Temperature range: -30°C~+80°C
8. Transmission rate :480Mbps
9. Material/plating specifications
Terminal :C5191, T=0.15 electroplated half gold nickel 1u" gold
Case: 201 Stainless Steel T=0.30 continuous Nickel plating 30u"
Glue core :LCP E130I black
10: Salt spray 24H

MICRO USB B TYPE PIN ASSIGNMENTS

PIN NUMBER	1	2	3	4	5
SIGNAL NAME	VBUS	D-	D+	ID	GND



产品图
PRODUCT CHART DWG

深圳市精拓金电子有限公司
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED				单位 UNITS			
X	±0.35	X	±5.°	MM	MM	制图	产品料号 PRODUCT PART NO.
X	±0.25	.X	±2.°	比例	1:1	审核	920-154A2021Y10114
.XX	±0.20	.XX	±1.°	SCALE		核准	产品名称 PRODUCT NO.
.XXX	±0.05	.XXX	±0.5°	日期	2021-03-10	黄国荣	MICRO USB 5P 1A 120MM 三脚 高度=10.0MM 带边
				DATE	APRD	NEW	角法
							版本
							AO

1

2

3

4

5

6

7




8

9

10

RoHS


MAPX	MODIFICATION	DRW	DATE

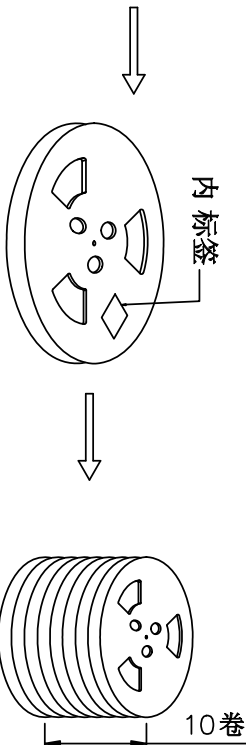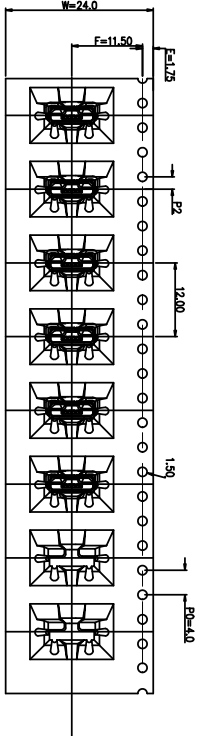


① 产品入载带示意图

② 卷盘贴标签示意图

③ 7盘产品叠层示意图

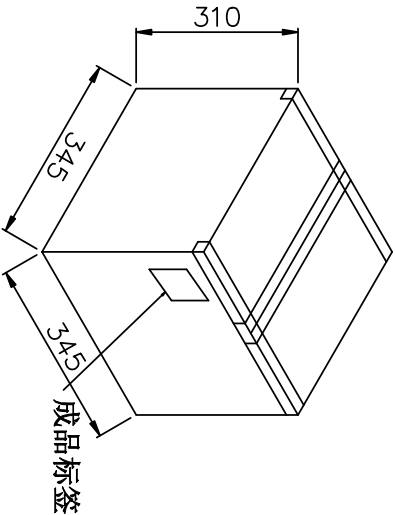

⑤ 外箱封箱示意图

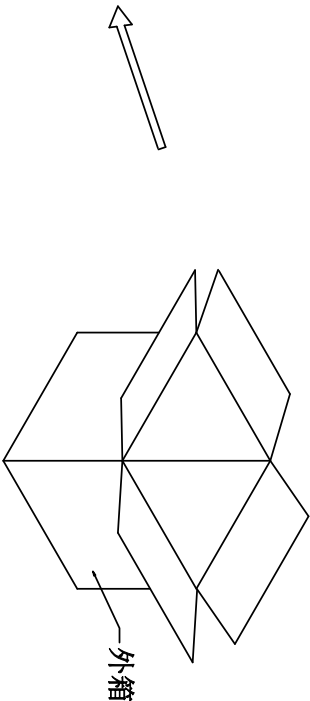

④ 产品入外箱示意图

包装说明:

1. 将检验好的成品;对插口朝前放入载带;每卷装400PCS产品;具体如图一所示
2. 将包装好的产品;每盘必需贴上内标签;具体如图二所示
3. 将贴好内标签的产品每7盘叠;具体如图三所示
5. 装好后并封好纸箱及贴好相关标签;具体如图五所示;
(产品包装的标签,如客户有要求,请按客户要求包装出货)
6. 载带前面留12PCS空格,后面留12PCS空格
7. COVER与CARRY剥离力:50-125g,速度:300mm/分钟左右,剥离角度:165°-180°

产品图

深圳市精拓金电子有限公司
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

公差一览表 TOLERANCE UNLESS OTHERWISE				单位		制图		产品料号	
X.	±0.35	X.	±5.°	UNITS	MM	DRAWING	L-S-S	PRODUCT PART NO.	920-154A2021Y10114
.X	±0.25	.X	±2.°	比例	1:1	审核	G-Z-F	产品名称	MICRO USB 5PIN母座H10.0-10.5MM包装规格
.XX	±0.20	.XX	±1.°	SCALE		OK/NO		PRODUCT NO.	
.XXX	±0.05	.XXX	±0.5°	日期	2021-03-10	核准	黄国荣	角法	VIEW
				DATE		APPD		版本	VER
								A0	

CONNECTOR (PCS)		REEL	CARTON
		400	2800

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [USB Connectors](#) category:

Click to view products by [Jing](#) manufacturer:

Other Similar products are found below :

[950](#) [A-USB A-LP-SMT-C](#) [A-USB B-TOP-C](#) [MUSBD11135](#) [17-200721](#) [217450-1](#) [KMBVX-TH-5S-B30](#) [KUSBX-AS2N-W](#) [KUSBX-SMT2AP1S-B30](#) [KUSBX-SMT2AP1S-W30](#) [935](#) [30-498-6](#) [SK-60A-2](#) [30-489](#) [30-541](#) [A-USB A-2P-C](#) [MIKROE-1451](#) [1-1734084-2](#) [10135326-001LF](#) [USB3FTV7APEG](#) [4198](#) [17-200011](#) [1040870124](#) [2274475-3](#) [914-614A2025S10200](#) [MUSBR-AHD2-M41-SK](#) [GSB3116344HR](#) [GSB343K331HR](#) [USB3FTV2SAZNF459](#) [USBF21GSCC](#) [U221-041N-1WVS62-F5D](#) [HYCW153-USBD05-500B](#) [HYCW219-USBD05-075B](#) [HYCW148-USBD05-117B](#) [HYCW149-USBD05-740B](#) [HYCW204-USBD05-108B](#) [HYCW214-USBA04-113B](#) [HYCW213-USBA04-113B](#) [KMMX-BSMT35S-1-B30TR](#) [GT-2A001F-CGNG1](#) [GT-USB-7010ES01](#) [GT-USB-7010i](#) [HC-ST-003-07-J](#) [918-418K2022Y40028](#) [920-462A2021Y10104](#) [AF 90° WJDG ZB](#) [TYPE-C 6P LCH10.5](#) [MICRO 7.2ZB5.0](#) [AM 180°](#) [MINI 5PTP-GZ](#)