

"High Frequency Ceramic Solutions"

2.45 GHz Impedance matched Balun-Filter for Texas Instruments' CC2500, CC2510, and CC2511 Chipsets

P/N 2450BM15B0003

Detail Specification: 9/12/2012

Page 1 of 3


General Specifications

Part Number	2450BM15B0003	Differential Mode Attenuation (dB)	20 min.@ 4800~5000MHz
Frequency (MHz)	2400~2500		20 min.@ 7200~7500MHz
Unbalanced Impedance	50 Ω	Common Mode Attenuation (dB)	17 min.@ 4800~5000MHz
Differential Balanced Impedance	Conjugate match to TI CC2500, CC2510, CC2511 chipsets	Operating Temperature	-40°C to +125°C
Insertion Loss	2.2 dB max. 1.7dB typ	Recommended Storage Conditions	+5 to +35°C, Humidity: 45-75%RH, 12 mos. Max
Return Loss	10 dB min.	Input Power	2 Watts max.
Phase Difference	180° $\pm$ 12	Reel Quantity	4,000
Amplitude Difference	2.0 dB max.		

* 18 months in vacuum sealed bag and 1 week after opened. For more info go to www.johansontechnology.com/silverleads


Mechanical Dimensions

	In	mm
L	0.079 $\pm$ 0.004	2.00 $\pm$ 0.10
W	0.049 $\pm$ 0.004	1.25 $\pm$ 0.10
T	0.031 $\pm$ 0.004	0.80 $\pm$ 0.10
a	0.012 $\pm$ 0.004	0.30 $\pm$ 0.10
b	0.008 $\pm$ 0.004	0.20 $\pm$ 0.10
c	0.012 +.004/-0.008	0.30 +0.1/-0.2
g	0.014 $\pm$ 0.004	0.35 $\pm$ 0.10
p	0.026 $\pm$ 0.002	0.65 $\pm$ 0.05

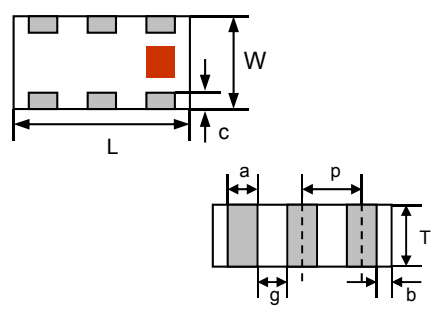

Terminal Configuration

No.	Function
1	Unbalanced Port
2	DC Feed + RF GND
3	Balanced Port
4	Balanced Port
5	GND
6	GND



Mounting Considerations

0402 22pF RF GND cap Johanson p/n: 500R07S220JV4

Johanson Chip Inductor p/n L-07C10NJV6 (EIA 0402)

CC2500

Units: mm

0.8

0.18

0.35

0.30

Legend:

- Solder Resist
- Land
- Through-hole (ϕ 0.3)

* Line width should be designed to match 50 Ω characteristic impedance, depending on PCB material and thickness.
 - Go to page 2 for a more detailed layout

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2012 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


2.45 GHz Impedance matched Balun-Filter for Texas Instruments' CC2500, CC2510, and CC2511 Chipsets

P/N 2450BM15B0003

Detail Specification: 9/12/2012

Page 2 of 3

Recommended Layout

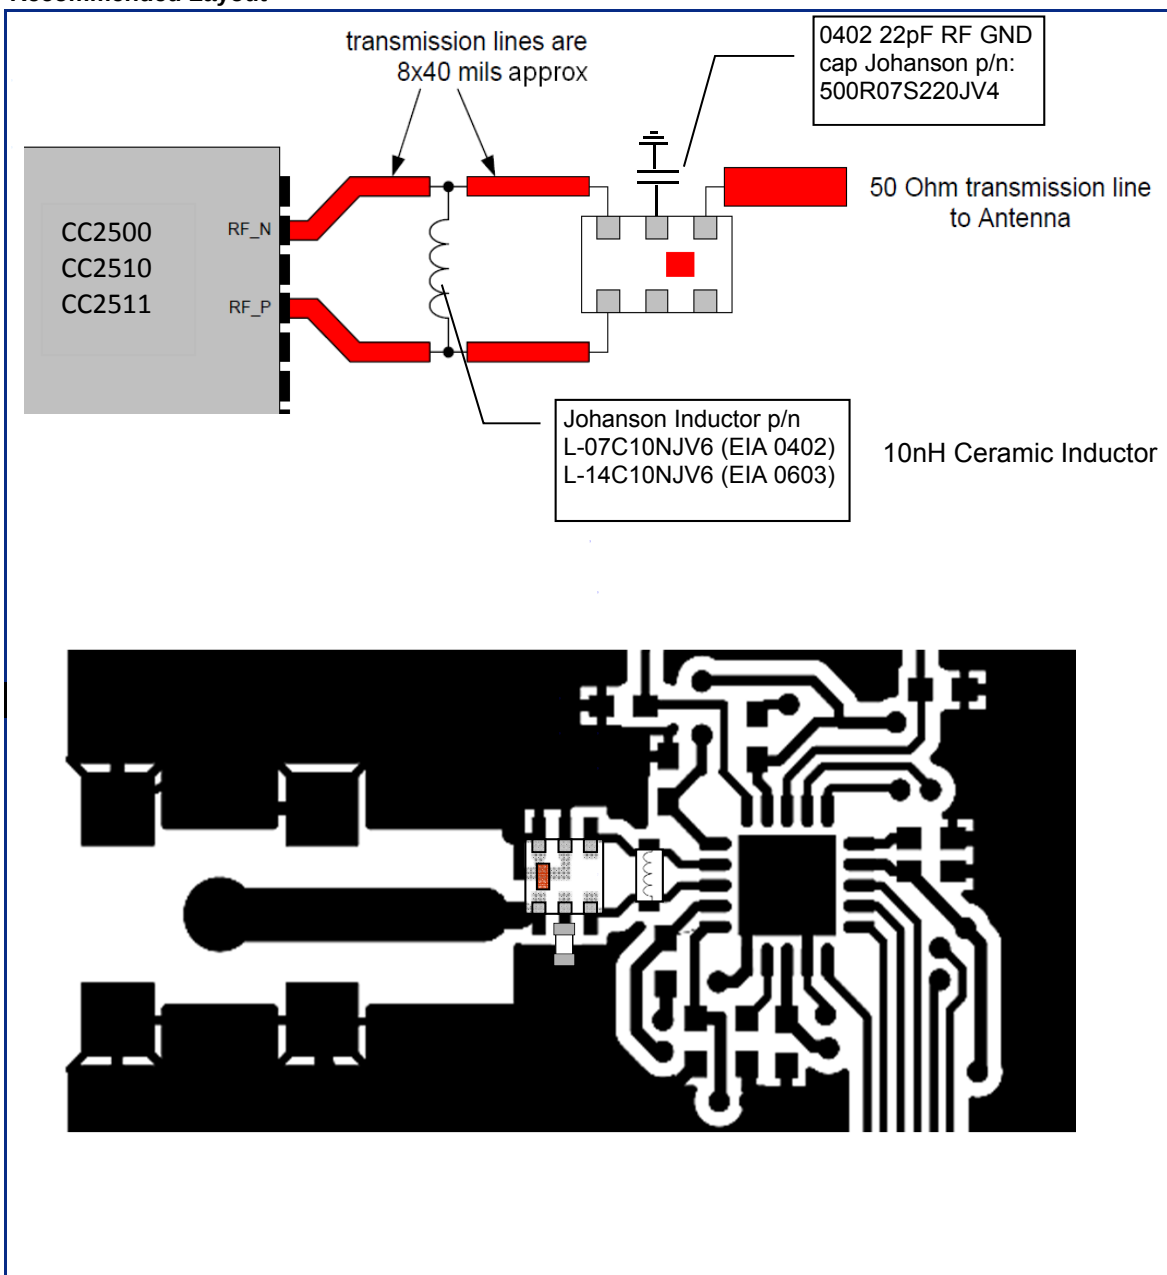

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2012 Johanson Technology, Inc. All Rights Reserved

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Johanson](#) manufacturer:

Other Similar products are found below :

[PD0409J5050S2HF](#) [AFS14A35-1591.50-T3](#) [AFS20A20-1227.60-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [MAPDCC0005](#)
[BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [X3C19F1-20S](#) [XC3500P-20S](#) [CDBLB455KCAX39-B0](#) [PD0922J5050D2HF](#)
[1E1305-3](#) [1F1304-3S](#) [BD1222J50200AHF](#) [BD1722J50100AHF](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [TP-101-PIN](#) [T-1000-N](#) [XC0900P-](#)
[10S](#) [XC0900B-30S](#) [11305-10](#) [5962-9091202MXA](#) [X3C06A4-03S](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#) [B39242B4360P810](#)
[B39781B8005P810](#) [B39881B8013P810](#) [B39771B8035P810](#) [B39741B8012P810](#) [B39212B8033P810](#) [B39162B8636P810](#) [SF2225E](#) [SF2275E](#)
[SF2395E](#) [SF2188D](#) [LFB182G45BG7D948](#) [SF2201E](#) [DC1722J5005AHF](#) [B39272B8818P810](#) [SF2253E](#) [SF2202E](#) [SF2182D](#) [SF2211E](#)
[SF2240E](#) [SF2307D](#)