

High Frequency Ceramic Solutions

2.45GHz Band Pass Filter

Detail Specification: 12/14/2015

P/N 2450BP39D100C

Page 1 of 3

General Specifications

Part Number	2450BP39D100C	Attenuation (min.)	30 dB @ 880 - 915 MHz
Frequency (MHz)	2400~2500	Attenuation (min.)	30 dB @ 1710 - 1785 Mhz
Insertion Loss	1.2 dB max.	Attenuation (min.)	25 dB @ 1850 - 1910 MHz
Return Loss	9.5 dB min.	Attenuation (min.)	25 dB @ 4800 - 5000 MHz
Impedance	50 Ω	Attenuation (min.)	15 dB @ 7200 - 7500 MHz
Input Power	500 mW max.	Storage Temperature	-55 to +85°C
Operating Temperature	-55 to +85°C	Reel Quantity	3,000


You can download measured s-parameters of this component at: <http://www.johansontechnology.com/band-pass-filters>

Part Number Explanation

P/N Suffix	Termination style	AgPt	Suffix = None	Eg. 2450BP39D100C
		Tin / Lead	Suffix = /Pb	Eg. 2450BP39D100C/Pb


Mechanical Dimensions

	In	mm
L	0.098 $\pm$ 0.008	2.50 $\pm$ 0.20
W	0.079 $\pm$ 0.008	2.00 $\pm$ 0.20
T	0.037 $\pm$ 0.004	0.95 $\pm$ 0.10
a	0.012 $\pm$ 0.008	0.30 $\pm$ 0.20
b	0.024 $\pm$ 0.008	0.60 $\pm$ 0.20
c	0.012 $\pm$ 0.008	0.30 $\pm$ 0.20

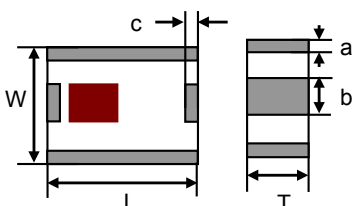

Terminal Configuration

1	GND	3	GND
2	OUT	4	IN



Mounting Considerations

Units: mm

Mount these devices with brown mark facing up.

* Line width should be designed to provide 50 ohm impedance, depending on PCB material and thickness

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 2.0

2015 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions


2.45GHz Band Pass Filter

Detail Specification: 12/14/2015

P/N 2450BP39D100C

Page 2 of 3

Typical Electrical Performance (T=25°C)

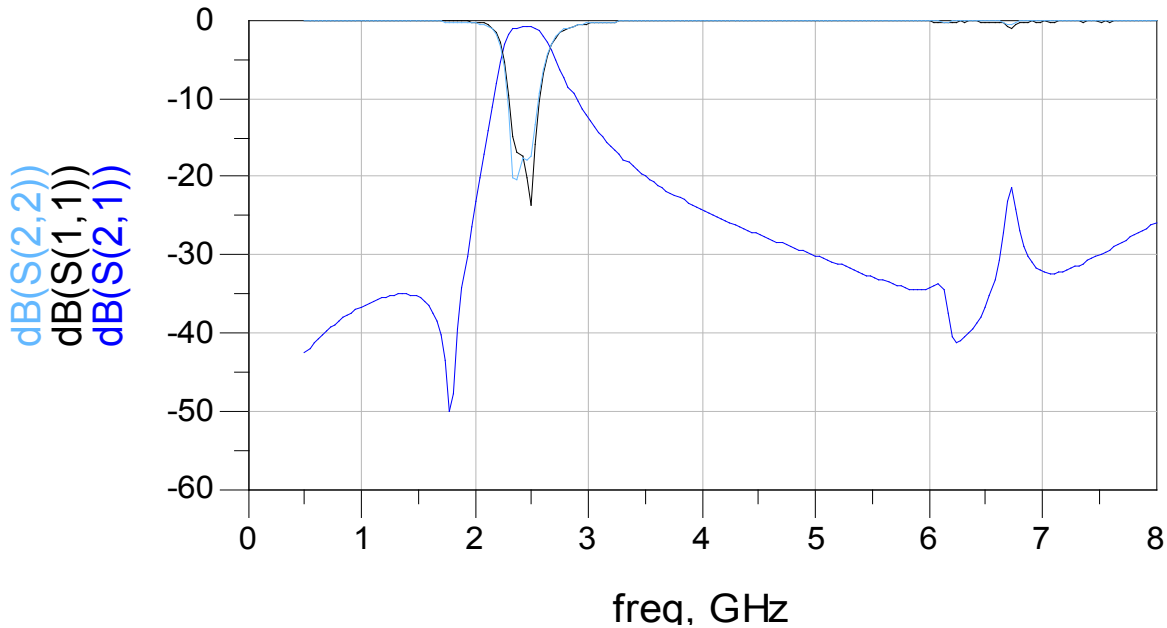

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver 2.0

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

2015 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.45GHz Band Pass Filter

P/N 2450BP39D100C

Detail Specification: 12/14/2015

Page 3 of 3

More Band Pass Filter info at:

<http://www.johansontechnology.com/band-pass-filters>

Packaging information

<http://www.johansontechnology.com/tape-reel-packaging>

Soldering Information

<http://www.johansontechnology.com/typical-soldering-profile>

MSL Info

<http://www.johansontechnology.com/msl-rating>

Recommended Storage Condition and Max Shelf Life

<http://www.johansontechnology.com/recommended-storage-conditions>

RoHS Compliance

<http://www.johansontechnology.com/rohs-compliance>

Layout review services

<http://www.johansontechnology.com/ask-a-question>

Antenna layout review, tuning, and characterization services

<http://www.johansontechnology.com/ipc-antenna-services>

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver 2.0

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

2015 Johanson Technology, Inc. All Rights Reserved

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Johanson](#) manufacturer:

Other Similar products are found below :

[PD0409J5050S2HF](#) [AFS14A35-1591.50-T3](#) [AFS20A20-1227.60-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [FM-104-PIN](#) [CER0813B](#)
[MAPDCC0005](#) [3A325](#) [BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [X3C19F1-20S](#) [XC3500P-20S](#) [CDBLB455KCAX39-B0](#)
[PD0922J5050D2HF](#) [600S150FTRB](#) [1E1305-3](#) [1F1304-3S](#) [BD1222J50200AHF](#) [BD1722J50100AHF](#) [2450DP39K5400E](#) [BD0810J50150AHF](#)
[BD1722J50200AHF](#) [DS-329-PIN](#) [TP-104-PIN](#) [TP-101-PIN](#) [HH-128-PIN](#) [T-1000-N](#) [JP506S](#) [XC0900P-10S](#) [11305-10](#) [5962-9091202MXA](#)
[3A412S](#) [X3C06A4-03S](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#) [B39242B4360P810](#) [B39781B8005P810](#) [B39881B8013P810](#) [B39791B8039P810](#)
[B39771B8035P810](#) [B39741B8012P810](#) [B39212B8033P810](#) [B39162B8636P810](#) [SF2225E](#) [SF2275E](#) [SF2395E](#) [SF2188D](#)