



ORDERING CODE

Joyin NTC Thermistor ——— **JNR**

Element Size(disc dia.) ——— **05**

05 = 5mm 08 = 8mm
10 = 10mm 13 = 13mm
15 = 15mm 20 = 20mm

Series ——— **S**

S = Inrush current limiting

Resistance of thermistor at 25°C ——— **100**

0R7 = 0.7 1R3 = 1.3 1R5 = 1.5 2R5 = 2.5
030 = 3 040 = 4 050 = 5 060 = 6
070 = 7 080 = 8 100 = 10 120 = 12
130 = 13 150 = 15 160 = 16 180 = 18
200 = 20 220 = 22 250 = 25 300 = 30
470 = 47 500 = 50 800 = 80 121 = 120
221 = 220

Tolerance ——— **L**

L = ± 15%
M = ± 20%

Lead Wire Diameter ——— **6**

6 = 0.6 ± 0.05mm
8 = 0.8 ± 0.05mm
1 = 1.0 ± 0.05mm

Lead Length & Packaging

U4 = 24mm min. for Bulk and Kink lead
U5 = 25mm min. for Bulk and Straight lead
AW= H0 16mm for Ammo and Kink lead
AY= H0 20mm for Ammo and Straight lead
RW= H0 16mm for T/R and Kink lead
RY = H0 20mm for T/R and Straight lead

* Special lead length & packaging per request.

Lead Style

Y=Kink Lead
P=Straight Lead
* Special lead styles per request


Lead Spacing

5=5.0mm
7=7.5mm
1=10mm


Dimension Table

unit:mm

Dim(ϕ)	5 ϕ	8 ϕ	10 ϕ	13 ϕ	15 ϕ	20 ϕ
D max.	7.5	10.5	12.5	15.5	17.5	23.0
d±0.05	0.6/0.8	0.6/0.8	0.6/0.8	0.8/1.0	0.8/1.0	1.0
F±1.0	5.0	5.0	5.0/7.5	7.5	7.5	7.5/10.0
H max.	11.0	14.5	18.5	21.0	23.0	28.0
H1 max.	10.0	13.5	17.5	19.0	22.0	27.0
L min.	24.0	24.0	24.0	24.0	24.0	24.0
L1 min.	25.0	25.0	25.0	25.0	25.0	25.0
T max.	6.0	6.0	7.5	8.0	8.0	8.0

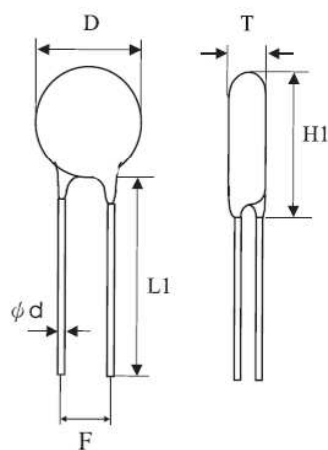

P TYPE

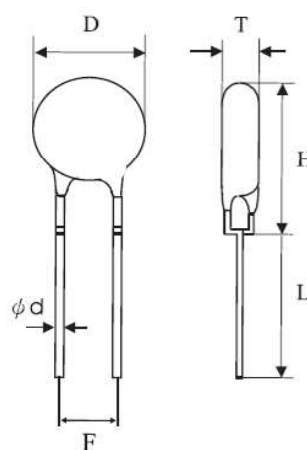


Y TYPE




Tape and Reel Dimensions

1/2" pitch

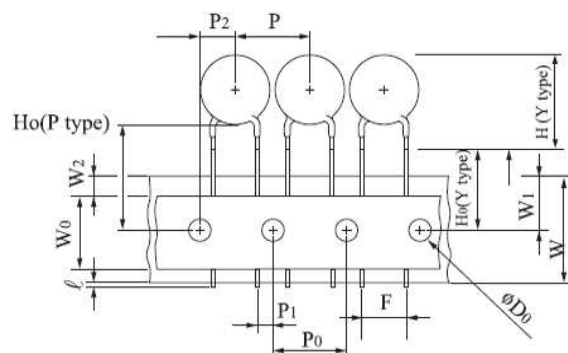

1.0" pitch

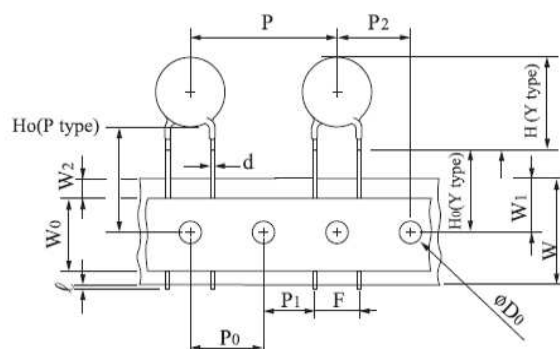


Symbols	Item	5/8/10mm	8/10/13/15/20mm		20mm
ℓ	Cut out length	1.1 mm max.	1.1 mm max.		
H (Y type)	Height of Top	See H max. table			
Ho(Y type)	Height to seating plane	16.0 ± 0.5 mm (* ± 1.0mm)	16.0 ± 0.5 mm (* ± 1.0mm)		
Ho(P type)	Height of component from hole center	16.0~21.0 mm	16.0~21.0 mm		
Δh	Front to back deviation	0 ± 2.0 mm	0 ± 2.0 mm		
W	Carrier tape width	18.0 $\begin{smallmatrix} +1.0 \\ -0.5 \end{smallmatrix}$ mm	18.0 $\begin{smallmatrix} +1.0 \\ -0.5 \end{smallmatrix}$ mm		
W ₀	Hold down tape width	10.0 mm	12.0 mm		
W ₁	Sprocket hole position	9.0 $\begin{smallmatrix} +0.75 \\ -0.5 \end{smallmatrix}$ mm	9.0 $\begin{smallmatrix} +0.75 \\ -0.5 \end{smallmatrix}$ mm		
W ₂	Adhesive tape position	3.0 mm max.	3.0 mm max.		
F	Component lead spacing	5.0 $\begin{smallmatrix} +0.8 \\ -0.2 \end{smallmatrix}$ mm	7.5 $\begin{smallmatrix} +0.8 \\ -0.2 \end{smallmatrix}$ mm	10.0 $\begin{smallmatrix} +0.8 \\ -0.2 \end{smallmatrix}$ mm	
P	Pitch of component	12.7 ± 1.0 mm	25.4 ± 1.0 mm		
P ₀	Sprocket hole pitch	12.7 ± 0.3 mm	12.7 ± 0.3 mm		
P ₁	Lead length from hole center to lead	3.85 ± 0.7 mm	8.95 ± 0.7 mm	7.7 ± 0.7 mm	
P ₂	Length from hole center to disk center	6.35 ± 1.3 mm	12.7 ± 1.3 mm		
D ₀	Sprocket hole diameter	4.0 ± 0.2 mm	4.0 ± 0.2 mm		
d	Lead wire diameter	0.6 ± 0.05 mm	0.8 ± 0.05 mm	1.0 ± 0.05 mm	
T	Disk thickness	See T max. table	See T max. table		
t ₁	Total thickness tape	0.7 ± 0.05 mm	0.7 ± 0.05mm		
t ₂	Total thickness	1.6 mm max.	1.8 mm max.		

*For manual line




MARKING



☐+ : Taiwan Joyin
☐* : Dongguan Joyin
YWW: Date code
Y : Year
WW : Weeks
+ : RoHS

PACKAGING

in mm

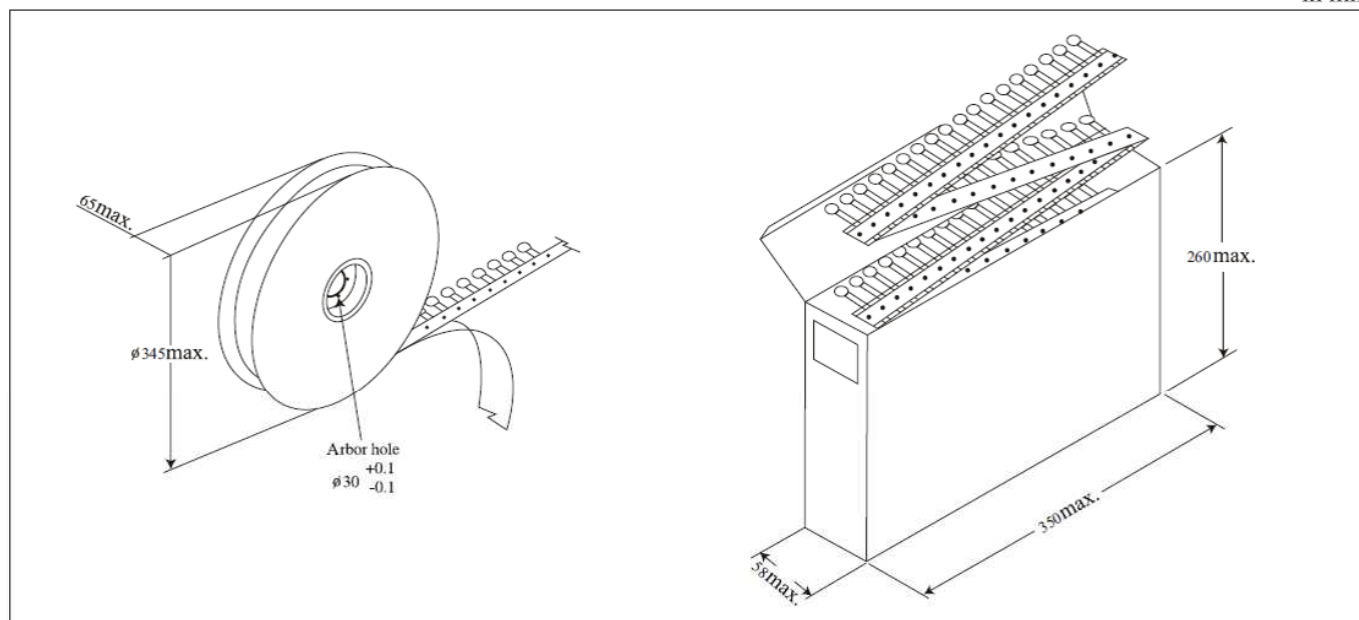

Quantity per Packing Unit

Diameter Packaging	5mm	8mm	10mm	13mm	15mm	20mm
Bulk (pcs/box)	5000	4000	1250-2500	750-2000	750-1500	500-750
Reel	1500	1500	750-1000	750-1000	500-750	—
Ammo	1500	1500	750-1000	750-1000	—	—

Packaging	Bulk (box)	Reel (5mm~13mm)	Reel (15mm~20mm)	Ammo (5mm,8mm)	Ammo (10mm~15mm)	Ammo (10mm~15mm)	Ammo (20mm)
Box size (mm)	290x155x110	350x350x108	350x350x74	330x240x46	343x210x52	343x260x52	343x220x58
Carton size (mm)	310x328x250	371x371x590	370x370x468	350x500x270	363x440x250	363x540x250	363x460x250
One carton with	4 Boxes	5 Boxes (10 reels)	6 Boxes(6 reels)	10 Boxes	8 Boxes	8 Boxes	8 Boxes

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [NTC \(Negative Temperature Coefficient\) Thermistors](#) ***category:***

Click to view products by [Joyin](#) ***manufacturer:***

Other Similar products are found below :

[118-253FAJ-P01](#) [123-802EAJ-P01](#) [199-303KAF-A02](#) [GB1074U-3-0](#) [526-31AA19-104](#) [111-182CAG-H01](#) [526-31AA79-102](#) [554-39BK01-250](#) [517-59CL01-202](#) [44015RC](#) [115-104KAH-901](#) [B57359V2224J260](#) [B57621C5472K062](#) [B57230V2103H260](#) [GA10K3MR1I](#) [GA1K7CG3](#)
[JSNA104F425FABXG](#) [JSNA103F345FABXG](#) [JSNA473F405FABXG](#) [JSNA103J395HABXG](#) [JSNA103F338FABXG](#)
[JSNA103F395FABXG](#) [NTCF044EF474FTBX](#) [KNTC0603/100KF4250](#) [NTDM1003FB39500148](#) [KNTC0603/10KJ3950](#)
[KNTC0805/30KF3950](#) [KNTC0603/30KJ3950](#) [CMFA 503F3950](#) [JSNB103F338FABXG](#) [JSNC103F395FABXG](#) [JSNB103F344FBBXG](#)
[JSNB473F405FABXG](#) [JSNB103J344HBBXG](#) [JSNC104J425HABXG](#) [JSNC104F425FABXG](#) [JSNC473F400FBBXG](#) [JSNB104F425FABXG](#)
[JSNB473F410FBBXG](#) [JSNC103J344HBBXG](#) [JSNB104F395FABXG](#) [JSNC103J395HABXG](#) [MF52A153J3950](#) [MF52A503F3950](#)
[MF52A202J3435](#) [MF52A502F3435](#) [10D-11](#) [NTC 22D-7](#) [RM-0434](#) [MZ08007C4PA00](#)