


How To Order

ORDERING CODE

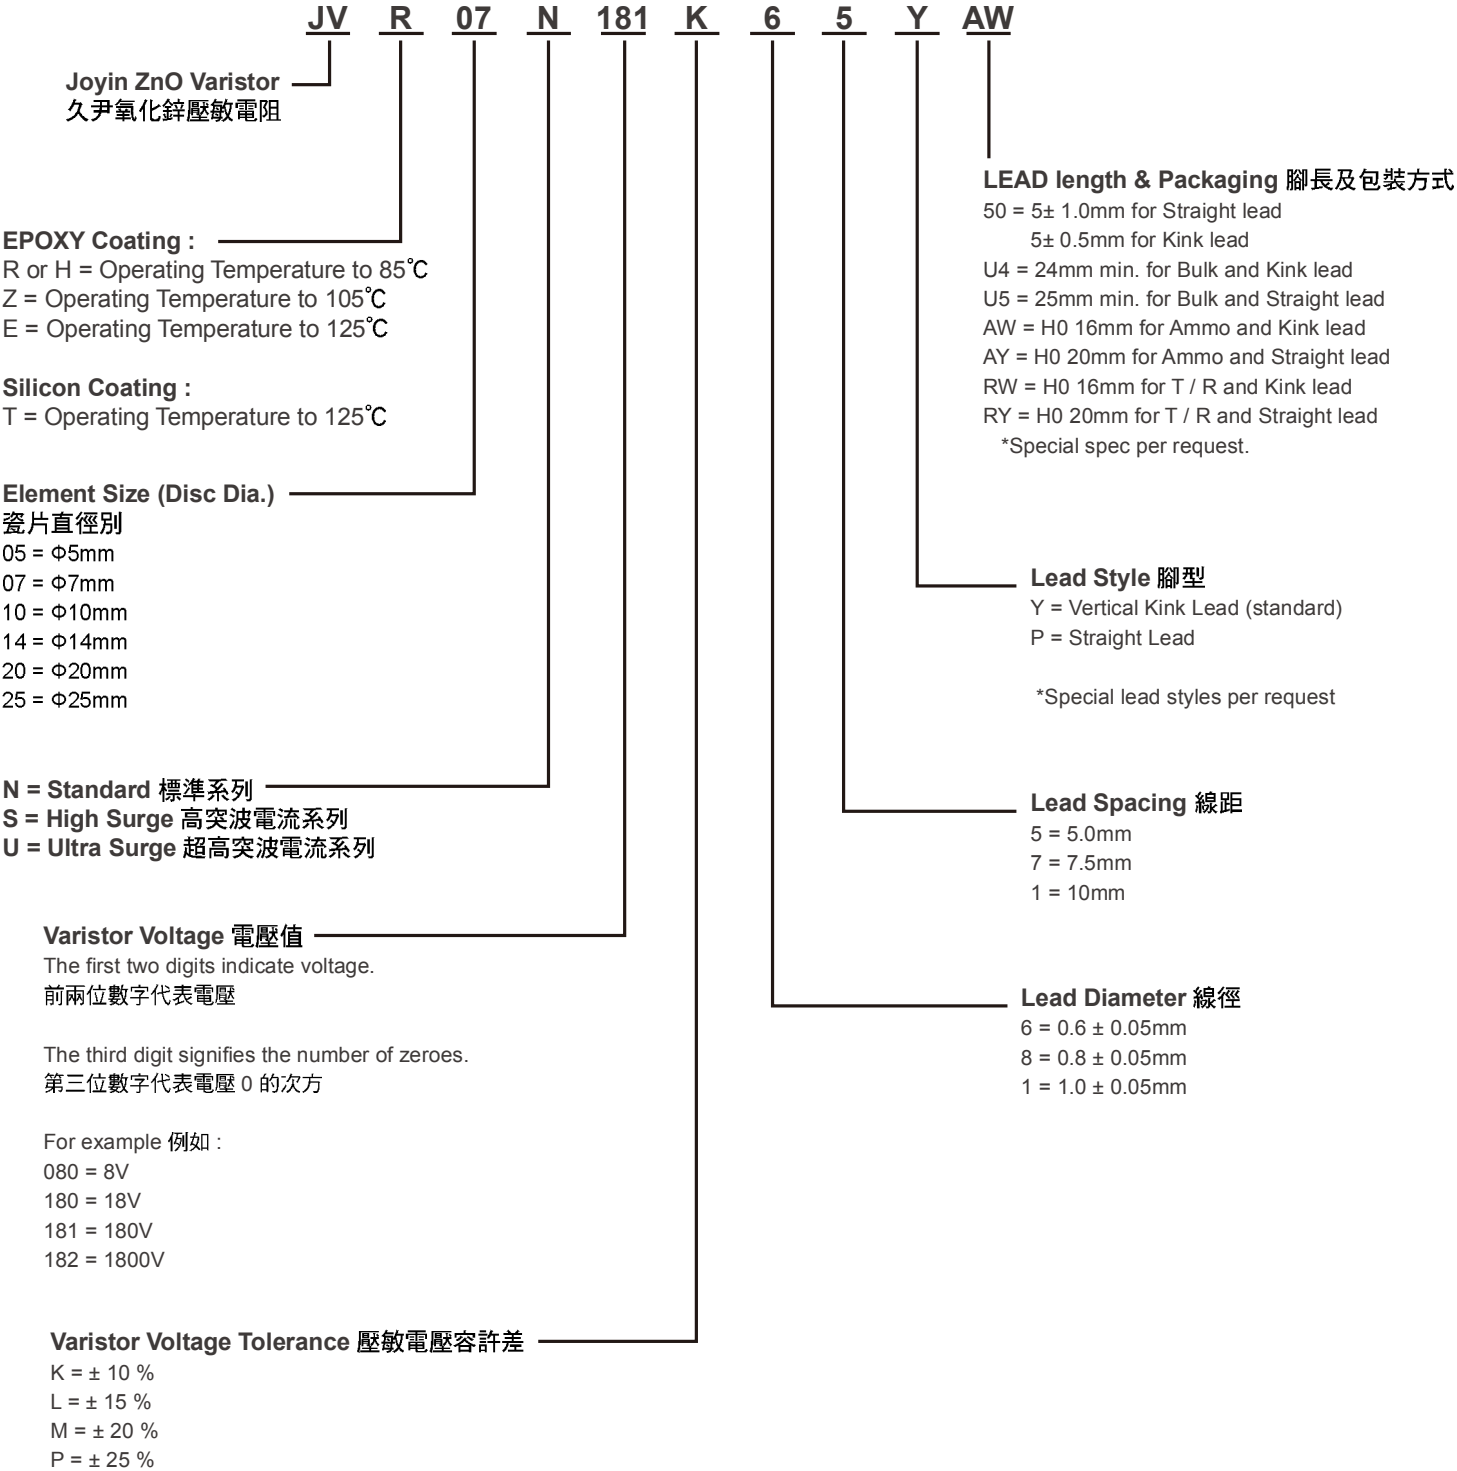

JVZ Series Operating Temperature 105°C

Standard Series Specification

Agency Approvals


Agency	UL	CUL	VDE		CQC	
Agency Approvals	4 TH Edition	CSA 22.2 No. 269.5-17	IEC61051-1 IEC61051-2 IEC61051-2-2	IEC61051-1 IEC61051-2 IEC61051-2-2 IEC62368-1: 2018 / G.8.1	GB/T10193-1997 GB/T10194-1997	GB4943.1-2011 GB/T10193-1997 GB/T10194-1997 GB8898-2011
Title	Transient Voltage Surge Suppressors	Transient Voltage Surge Suppressors	Varistors for use in electronic equipment		Engaged in Voluntary Product Certification	
File No.	VZCA2.E325508	VZCA8.E325508	5937		CQC19001230701/702/703/704/705/706	
Symbols	☆		★	★	★	⊛

Ø 5mm


Rating and Characteristics

Part No.	Varistor Voltage at 0.1mA		Maximum Allowable Voltage		Maximum Clamping Voltage		Withstanding Surge Current (8/20us)	Nominal Discharge Current (8/20us)	Rated Wattage	Energy (10/1000us)	Certification
	DC (V)	Tolerance	AC rms (V)	DC (V)	V@ ic (V)	ic (A)	1 Time (A)	In (KA)	(W)	(J)	  
JVZ 05N 180M	18	±20%	11	14	40	1	100	0.1	0.01	0.6	☆ ☆ ☆
JVZ 05N 220L	22	±15%	14	18	48	1	100	0.1	0.01	0.7	☆ ☆ ☆
JVZ 05N 270K	27	±10%	17	22	60	1	100	0.1	0.01	0.9	☆ ☆ ☆
JVZ 05N 330K	33	±10%	20	26	73	1	100	0.1	0.01	1.1	☆ ☆ ☆
JVZ 05N 390K	39	±10%	25	31	86	1	100	0.1	0.01	1.2	☆ ☆ ☆
JVZ 05N 470K	47	±10%	30	38	104	1	100	0.1	0.01	1.5	☆ ☆ ☆
JVZ 05N 560K	56	±10%	35	45	123	1	100	0.1	0.01	1.8	☆ ☆ ☆
JVZ 05N 680K	68	±10%	40	56	150	1	100	0.1	0.01	2.1	☆ ☆ ☆
JVZ 05N 820K	82	±10%	50	65	145	5	400	0.1	0.1	2.8	☆ ☆ ☆
JVZ 05N 101K	100	±10%	60	85	175	5	400	0.1	0.1	3.5	☆ ☆ ☆
JVZ 05N 121K	120	±10%	75	100	210	5	400	0.1	0.1	4	☆ ☆ ☆
JVZ 05N 151K	150	±10%	95	125	260	5	400	0.1	0.1	5.5	☆ ☆ ☆
JVZ 05N 181K	180	±10%	115	150	320	5	400	0.1	0.1	6.5	☆ ☆ ☆
JVZ 05N 201K	200	±10%	130	170	355	5	400	0.1	0.1	7.1	☆ ☆ ☆
JVZ 05N 221K	220	±10%	140	180	380	5	400	0.1	0.1	7.8	☆ ☆ ☆
JVZ 05N 241K	240	±10%	150	200	415	5	400	0.1	0.1	8.4	☆ ☆ ☆
JVZ 05N 271K	270	±10%	175	225	475	5	400	0.1	0.1	9.9	☆ ☆ ☆
JVZ 05N 301K	300	±10%	195	250	525	5	400	0.1	0.1	10.5	☆ ☆ ☆
JVZ 05N 331K	330	±10%	210	275	575	5	400	0.1	0.1	11.5	☆ ☆ ☆
JVZ 05N 361K	360	±10%	230	300	620	5	400	0.1	0.1	13	☆ ☆ ☆
JVZ 05N 391K	390	±10%	250	320	675	5	400	0.1	0.1	15	☆ ☆ ☆
JVZ 05N 431K	430	±10%	275	350	745	5	400	0.1	0.1	16.5	☆ ☆ ☆
JVZ 05N 471K	470	±10%	300	385	810	5	400	0.1	0.1	17.5	☆ ☆ ☆
JVZ 05N 511K	510	±10%	320	418	880	5	400	0.1	0.1	18.5	☆ ☆ ☆
JVZ 05N 561K	560	±10%	350	460	940	5	400	0.1	0.1	19.5	☆ ☆ ☆
JVZ 05N 621K	620	±10%	385	505	1050	5	400	0.1	0.1	20.5	☆ ☆ ☆
JVZ 05N 681K	680	±10%	420	560	1150	5	400	0.1	0.1	21.5	☆ ☆ ☆
JVZ 05N 751K	750	±10%	460	615	1290	5	400	0.1	0.1	22.5	☆ ☆ ☆


PULSE LIFETIME RATINGS- 5mm 05N180M~05N680K

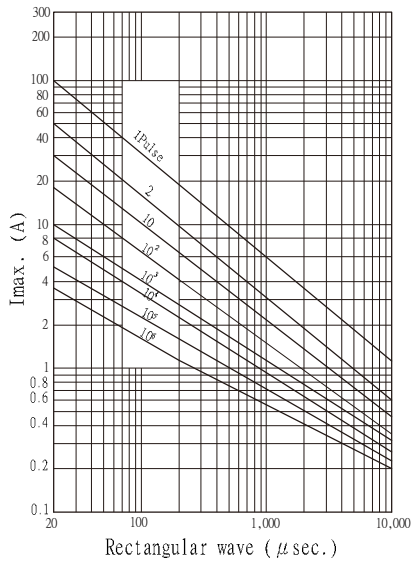


V-I CHARACTERISTIC CURVE -5mm 05N180M~05N680K

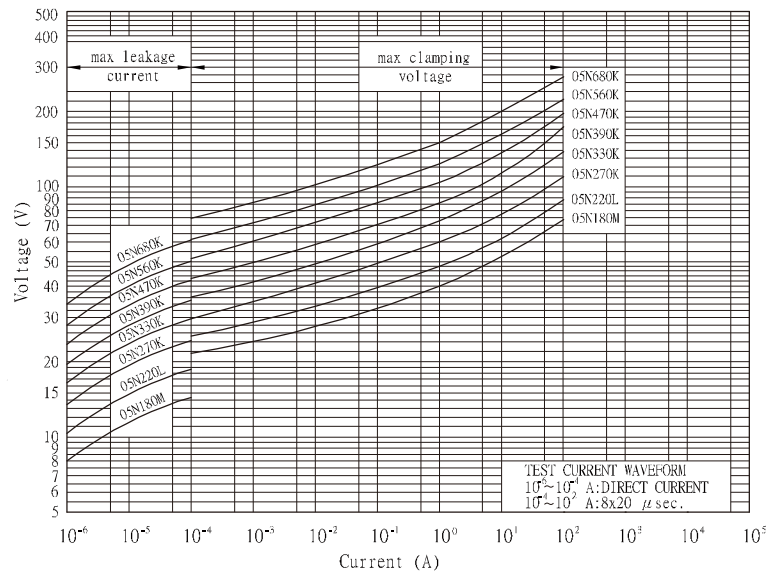

05N820K~05N751K

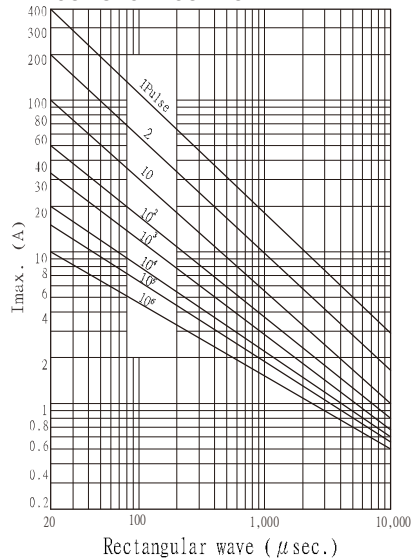

05N820K~05N751K

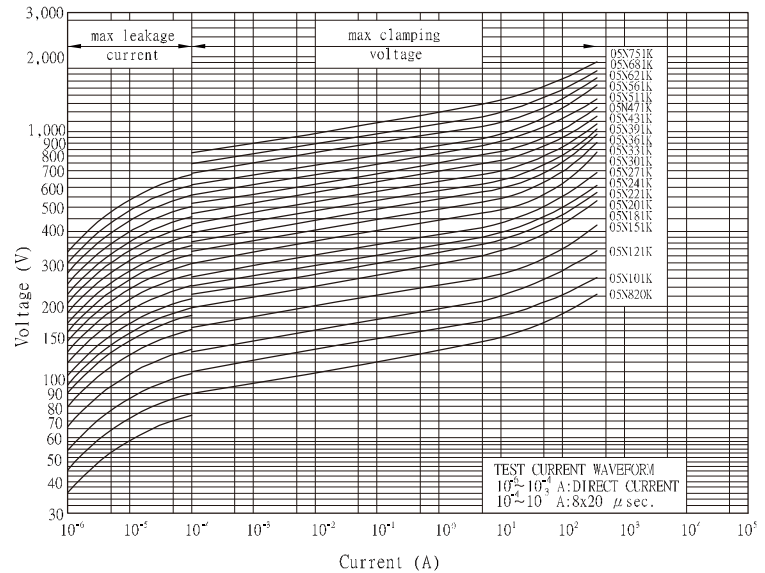


Ø 7mm

Rating and Characteristics


Part No.	Varistor Voltage at 1mA		Maximum Allowable Voltage		Maximum Clamping Voltage		Withstanding Surge Current (8/20us)	Nominal Discharge Current (8/20us)	Rated Wattage	Energy (10/1000us)	Certification
	DC (V)	Tolerance	AC rms (V)	DC (V)	V@ ic (V)	ic (A)	1 Time (A)	In (KA)	(W)	(J)	  
JVZ 07N 180M	18	±20%	11	14	40	2.5	250	0.15	0.02	1.2	☆ ☆ ☆
JVZ 07N 220L	22	±15%	14	18	48	2.5	250	0.15	0.02	1.4	☆ ☆ ☆
JVZ 07N 270K	27	±10%	17	22	60	2.5	250	0.15	0.02	1.7	☆ ☆ ☆
JVZ 07N 330K	33	±10%	20	26	73	2.5	250	0.15	0.02	2.2	☆ ☆ ☆
JVZ 07N 390K	39	±10%	25	31	86	2.5	250	0.15	0.02	2.4	☆ ☆ ☆
JVZ 07N 470K	47	±10%	30	38	104	2.5	250	0.15	0.02	3.0	☆ ☆ ☆
JVZ 07N 560K	56	±10%	35	45	123	2.5	250	0.15	0.02	3.5	☆ ☆ ☆
JVZ 07N 680K	68	±10%	40	56	150	2.5	250	0.15	0.02	4.3	☆ ☆ ☆
JVZ 07N 820K	82	±10%	50	65	145	10	1200	0.5	0.25	5.5	☆ ☆ ☆
JVZ 07N 101K	100	±10%	60	85	175	10	1200	0.5	0.25	7.0	☆ ☆ ☆
JVZ 07N 121K	120	±10%	75	100	210	10	1200	0.5	0.25	8.0	☆ ☆ ☆
JVZ 07N 151K	150	±10%	95	125	260	10	1200	0.5	0.25	11.0	☆ ☆ ☆
JVZ 07N 181K	180	±10%	115	150	320	10	1200	0.5	0.25	13.0	☆ ☆ ☆
JVZ 07N 201K	200	±10%	130	170	355	10	1200	0.5	0.25	14.3	☆ ☆ ☆
JVZ 07N 221K	220	±10%	140	180	380	10	1200	0.5	0.25	15.5	☆ ☆ ☆
JVZ 07N 241K	240	±10%	150	200	415	10	1200	0.5	0.25	16.8	☆ ☆ ☆
JVZ 07N 271K	270	±10%	175	225	475	10	1200	0.5	0.25	19.8	☆ ☆ ☆
JVZ 07N 301K	300	±10%	195	250	525	10	1200	0.5	0.25	21.0	☆ ☆ ☆
JVZ 07N 331K	330	±10%	210	275	575	10	1200	0.5	0.25	23.0	☆ ☆ ☆
JVZ 07N 361K	360	±10%	230	300	620	10	1200	0.5	0.25	26.0	☆ ☆ ☆
JVZ 07N 391K	390	±10%	250	320	675	10	1200	0.5	0.25	30.0	☆ ☆ ☆
JVZ 07N 431K	430	±10%	275	350	745	10	1200	0.5	0.25	33.0	☆ ☆ ☆
JVZ 07N 471K	470	±10%	300	385	810	10	1200	0.5	0.25	35.0	☆ ☆ ☆
JVZ 07N 511K	510	±10%	320	418	880	10	1200	0.5	0.25	37.0	☆ ☆ ☆
JVZ 07N 561K	560	±10%	350	460	940	10	1200	0.5	0.25	39.0	☆ ☆ ☆
JVZ 07N 621K	620	±10%	385	505	1050	10	1200	0.5	0.25	41.0	☆ ☆ ☆
JVZ 07N 681K	680	±10%	420	560	1150	10	1200	0.5	0.25	43.0	☆ ☆ ☆
JVZ 07N 751K	750	±10%	460	615	1290	10	1200	0.5	0.25	45.0	☆ ☆ ☆
JVZ 07N 781K	780	±10%	485	640	1290	10	1200	0.5	0.25	46.0	☆ ☆ ☆
JVZ 07N 821K	820	±10%	510	670	1355	10	1200	0.5	0.25	47.0	☆ ☆ ☆




PULSE LIFETIME RATINGS- 7mm
07N180M~07N680K

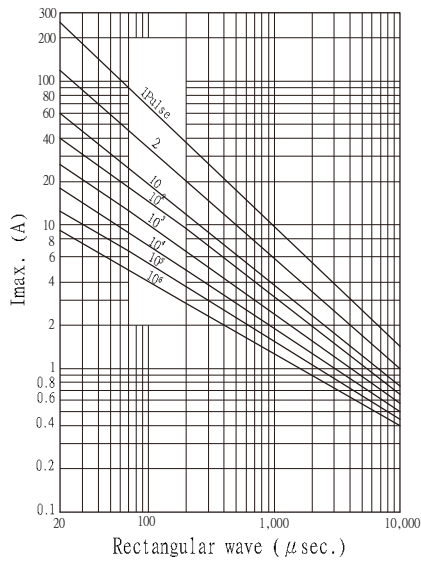


V-I CHARACTERISTIC CURVE -7mm
07N180M~07N680K

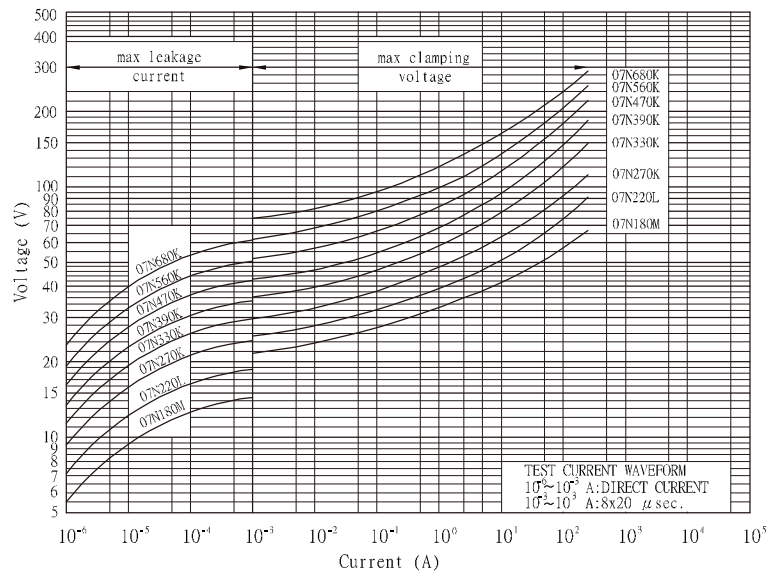

07N820K~07N821K

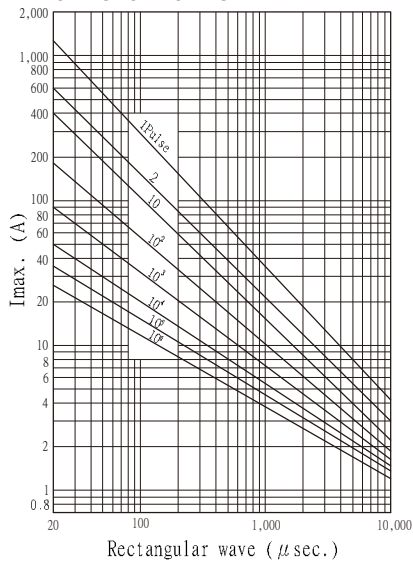

07N820K~07N821K

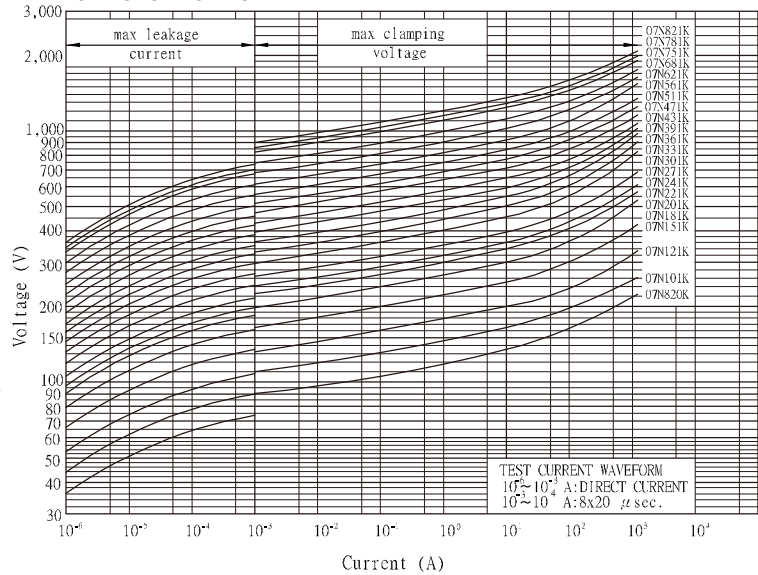


Ø 10mm


Rating and Characteristics

Part No.	Varistor Voltage at 1mA		Maximum Allowable Voltage		Maximum Clamping Voltage		Withstanding Surge Current (8/20us)	Nominal Discharge Current (8/20us)	Rated Wattage	Energy (10/1000us)	Certification		
	DC (V)	Tolerance	AC rms (V)	DC (V)	V@ ic (V)	ic (A)	1 Time (A)	In (KA)	(W)	(J)			
JVZ 10N 180M	18	±20%	11	14	36	5	500	0.25	0.05	2.4	☆	☆	☆
JVZ 10N 220L	22	±15%	14	18	43	5	500	0.25	0.05	2.7	☆	☆	☆
JVZ 10N 270K	27	±10%	17	22	53	5	500	0.25	0.05	3.5	☆	☆	☆
JVZ 10N 330K	33	±10%	20	26	65	5	500	0.25	0.05	4.4	☆	☆	☆
JVZ 10N 390K	39	±10%	25	31	77	5	500	0.25	0.05	4.7	☆	☆	☆
JVZ 10N 470K	47	±10%	30	38	93	5	500	0.25	0.05	6.0	☆	☆	☆
JVZ 10N 560K	56	±10%	35	45	110	5	500	0.25	0.05	7.0	☆	☆	☆
JVZ 10N 680K	68	±10%	40	56	135	5	500	0.25	0.05	8.5	☆	☆	☆
JVZ 10N 820K	82	±10%	50	65	135	25	2500	1.5	0.4	11.0	☆	☆	☆
JVZ 10N 101K	100	±10%	60	85	165	25	2500	1.5	0.4	14.0	☆	☆	☆
JVZ 10N 121K	120	±10%	75	100	200	25	2500	1.5	0.4	16.0	☆	☆	☆
JVZ 10N 151K	150	±10%	95	125	250	25	2500	1.5	0.4	22.0	☆	☆	☆
JVZ 10N 181K	180	±10%	115	150	300	25	2500	1.5	0.4	26.0	☆	★	☆
JVZ 10N 201K	200	±10%	130	170	340	25	2500	1.5	0.4	28.5	☆	★	☆
JVZ 10N 221K	220	±10%	140	180	360	25	2500	1.5	0.4	31.0	☆	★	☆
JVZ 10N 241K	240	±10%	150	200	395	25	2500	1.5	0.4	33.5	☆	★	☆
JVZ 10N 271K	270	±10%	175	225	455	25	2500	1.5	0.4	39.5	☆	★	☆
JVZ 10N 301K	300	±10%	195	250	505	25	2500	1.5	0.4	42.0	☆	★	☆
JVZ 10N 331K	330	±10%	210	275	550	25	2500	1.5	0.4	46.0	☆	★	☆
JVZ 10N 361K	360	±10%	230	300	595	25	2500	1.5	0.4	52.0	☆	★	☆
JVZ 10N 391K	390	±10%	250	320	650	25	2500	1.5	0.4	60.0	☆	★	☆
JVZ 10N 431K	430	±10%	275	350	710	25	2500	1.5	0.4	66.0	☆	★	☆
JVZ 10N 471K	470	±10%	300	385	775	25	2500	1.5	0.4	70.0	☆	★	☆
JVZ 10N 511K	510	±10%	320	418	842	25	2500	1.5	0.4	74.0	☆	★	☆
JVZ 10N 561K	560	±10%	350	460	920	25	2500	1.5	0.4	78.0	☆	★	☆
JVZ 10N 621K	620	±10%	385	505	1025	25	2500	1.5	0.4	82.0	☆	★	☆
JVZ 10N 681K	680	±10%	420	560	1120	25	2500	1.5	0.4	86.0	☆	★	☆
JVZ 10N 751K	750	±10%	460	615	1240	25	2500	1.5	0.4	90.0	☆	★	☆
JVZ 10N 781K	780	±10%	485	640	1290	25	2500	1.5	0.4	92.0	☆	★	☆
JVZ 10N 821K	820	±10%	510	670	1355	25	2500	1.5	0.4	94.0	☆	★	☆
JVZ 10N 911K	910	±10%	550	745	1500	25	2500	1.5	0.4	102.0	☆	★	☆
JVZ 10N 102K	1000	±10%	625	825	1650	25	2500	1.5	0.4	112.0	☆	★	☆
JVZ 10N 112K	1100	±10%	680	895	1815	25	2500	1.5	0.4	124.0	☆	★	☆


PULSE LIFETIME RATINGS- 10mm
10N180M~10N680K

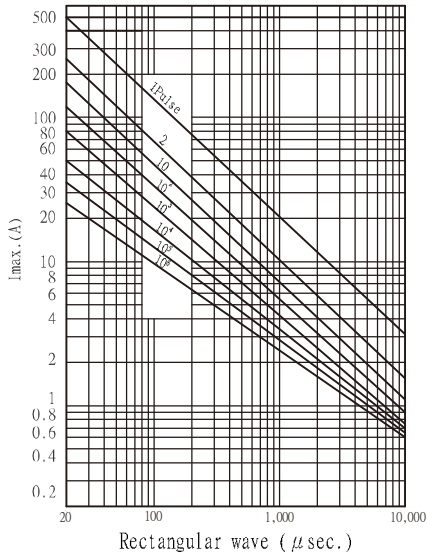


V-I CHARACTERISTIC CURVE -10mm
10N180M~10N680K

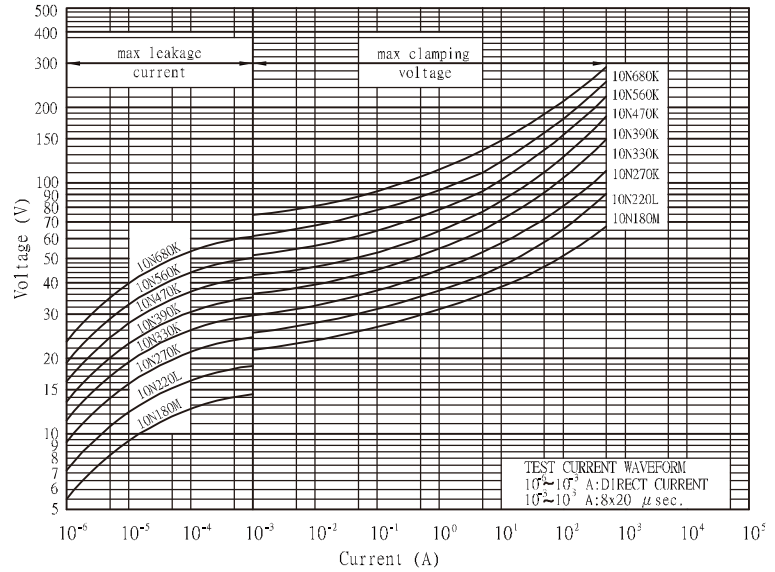


10N820K~10N471K

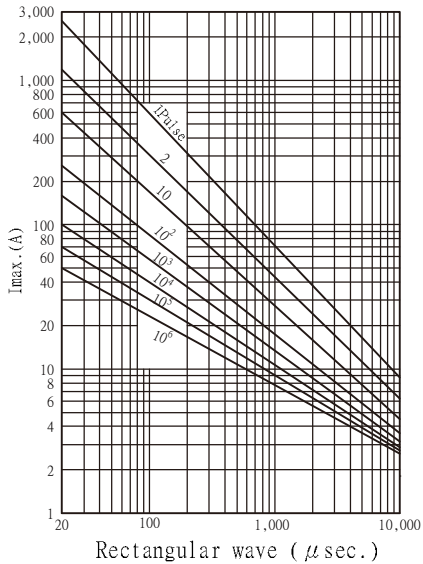


10N820K~10N471K

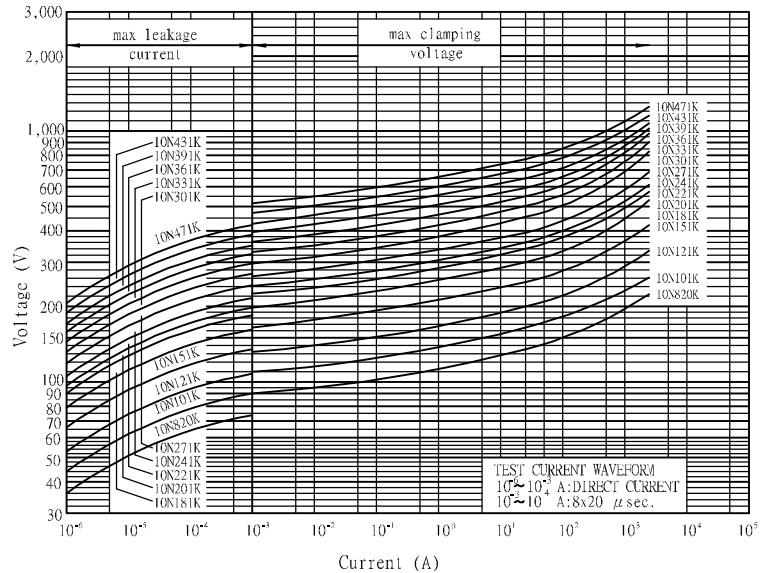

10N511K~10N182K

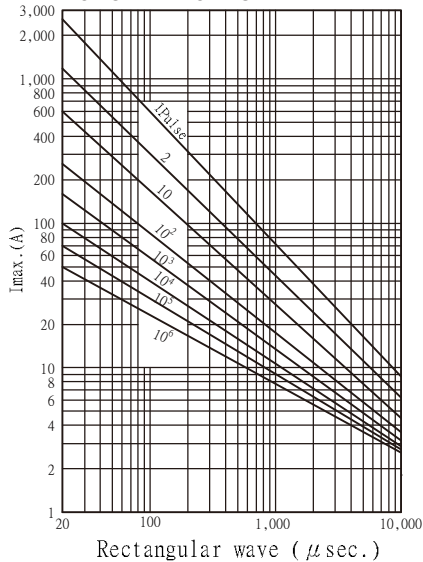

10N511K~10N182K

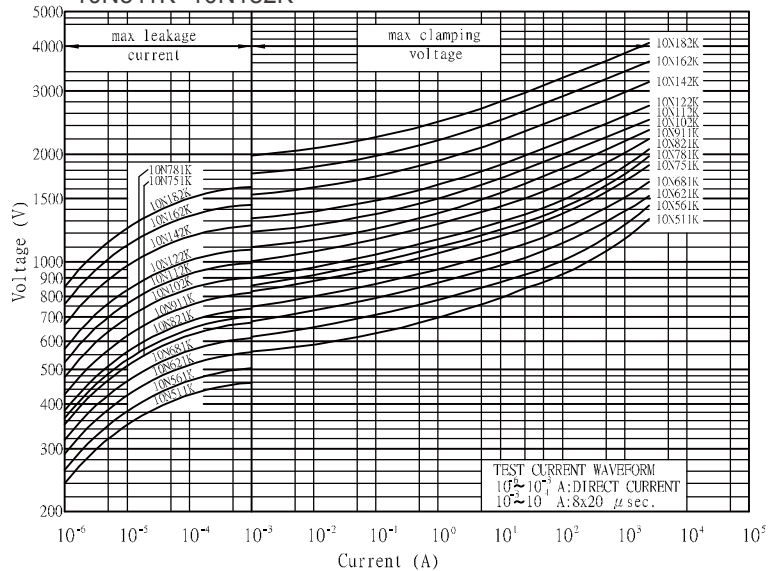


Ø 14mm


Rating and Characteristics

Part No.	Varistor Voltage at 1mA		Maximum Allowable Voltage		Maximum Clamping Voltage		Withstanding Surge Current (8/20us)	Nominal Discharge Current (8/20us)	Rated Wattage	Energy (10/1000us)	Certification		
	DC (V)	Tolerance	AC rms (V)	DC (V)	V@ ic (V)	ic (A)	1 Time (A)	In (KA)	(W)	(J)			
JVZ 14N 180M	18	±20%	11	14	36	10	1000	1	0.1	4.7	☆	☆	☆
JVZ 14N 220L	22	±15%	14	18	43	10	1000	1	0.1	5.4	☆	☆	☆
JVZ 14N 270K	27	±10%	17	22	53	10	1000	1	0.1	6.9	☆	☆	☆
JVZ 14N 330K	33	±10%	20	26	65	10	1000	1	0.1	8.8	☆	☆	☆
JVZ 14N 390K	39	±10%	25	31	77	10	1000	1	0.1	9.4	☆	☆	☆
JVZ 14N 470K	47	±10%	30	38	93	10	1000	1	0.1	12	☆	☆	☆
JVZ 14N 560K	56	±10%	35	45	110	10	1000	1	0.1	14	☆	☆	☆
JVZ 14N 680K	68	±10%	40	56	135	10	1000	1	0.1	17	☆	☆	☆
JVZ 14N 820K	82	±10%	50	65	135	50	4500	3	0.6	22	☆	☆	☆
JVZ 14N 101K	100	±10%	60	85	165	50	4500	3	0.6	28	☆	☆	☆
JVZ 14N 121K	120	±10%	75	100	200	50	4500	3	0.6	32	☆	☆	☆
JVZ 14N 151K	150	±10%	95	125	250	50	4500	3	0.6	44	☆	☆	☆
JVZ 14N 181K	180	±10%	115	150	300	50	4500	3	0.6	52	☆	★	☆
JVZ 14N 201K	200	±10%	130	170	340	50	4500	3	0.6	57	☆	★	★
JVZ 14N 221K	220	±10%	140	180	360	50	4500	3	0.6	62	☆	★	★
JVZ 14N 241K	240	±10%	150	200	395	50	4500	3	0.6	67	☆	★	★
JVZ 14N 271K	270	±10%	175	225	455	50	4500	3	0.6	79	☆	★	★
JVZ 14N 301K	300	±10%	195	250	505	50	4500	3	0.6	84	☆	★	★
JVZ 14N 331K	330	±10%	210	275	550	50	4500	3	0.6	92	☆	★	★
JVZ 14N 361K	360	±10%	230	300	595	50	4500	3	0.6	104	☆	★	★
JVZ 14N 391K	390	±10%	250	320	650	50	4500	3	0.6	120	☆	★	★
JVZ 14N 431K	430	±10%	275	350	710	50	4500	3	0.6	132	☆	★	★
JVZ 14N 471K	470	±10%	300	385	775	50	4500	3	0.6	140	☆	★	★
JVZ 14N 511K	510	±10%	320	418	842	50	4500	3	0.6	148	☆	★	★
JVZ 14N 561K	560	±10%	350	460	920	50	4500	3	0.6	156	☆	★	★
JVZ 14N 621K	620	±10%	385	505	1025	50	4500	3	0.6	164	☆	★	★
JVZ 14N 681K	680	±10%	420	560	1120	50	4500	3	0.6	172	☆	★	★
JVZ 14N 751K	750	±10%	460	615	1240	50	4500	3	0.6	180	☆	★	★
JVZ 14N 781K	780	±10%	485	640	1290	50	4500	3	0.6	184	☆	★	★
JVZ 14N 821K	820	±10%	510	670	1355	50	4500	3	0.6	188	☆	★	★
JVZ 14N 911K	910	±10%	550	745	1500	50	4500	3	0.6	204	☆	★	★
JVZ 14N 102K	1000	±10%	625	825	1650	50	4500	3	0.6	224	☆	★	★
JVZ 14N 112K	1100	±10%	680	895	1815	50	4500	3	0.6	248	☆	★	★


PULSE LIFETIME RATINGS- 14mm 14N180M~14N680K

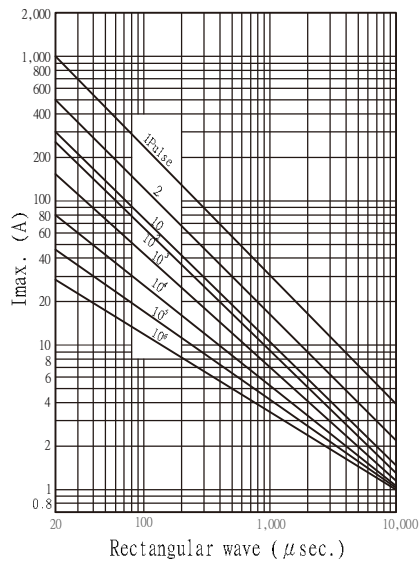


V-I CHARACTERISTIC CURVE -14mm 14N180M~14N680K

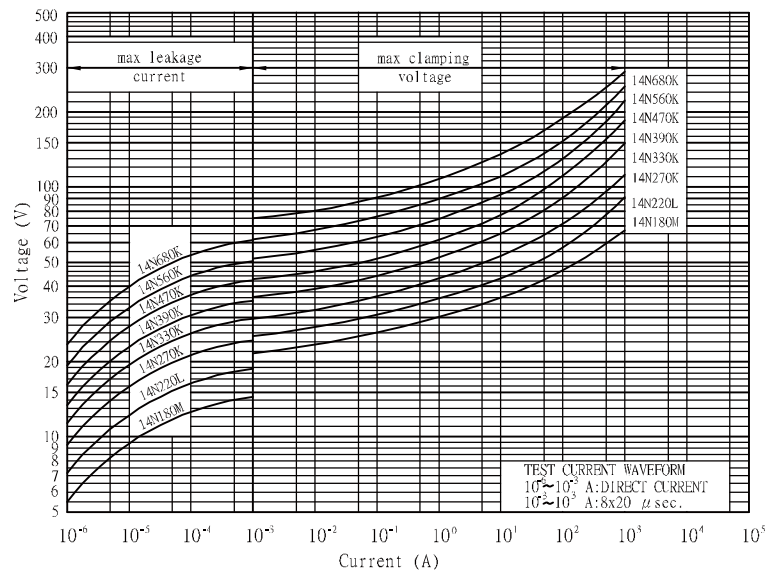


14N820K~14N471K

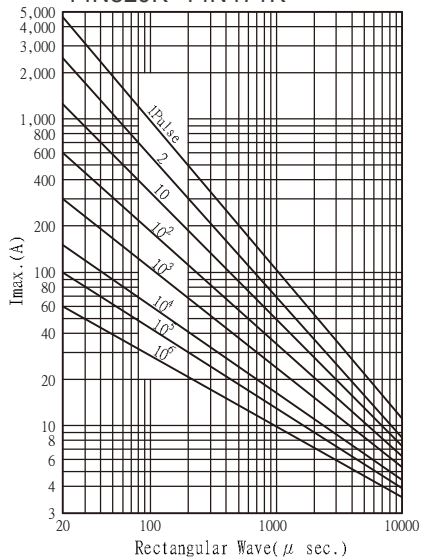


14N820K~14N471K

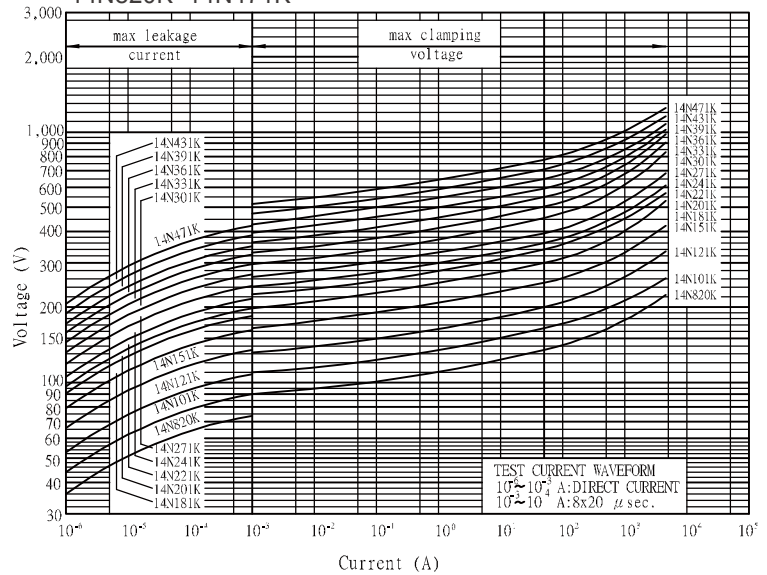

14N511K~14N182K

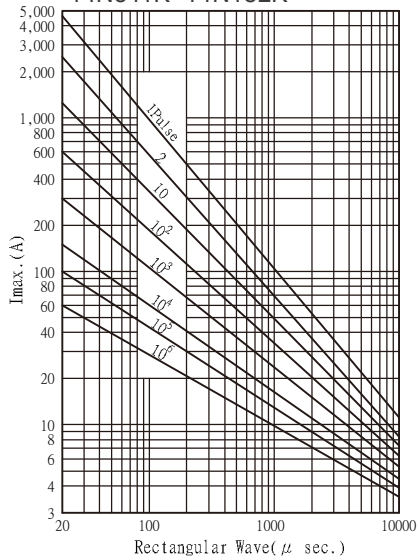

14N511K~14N182K

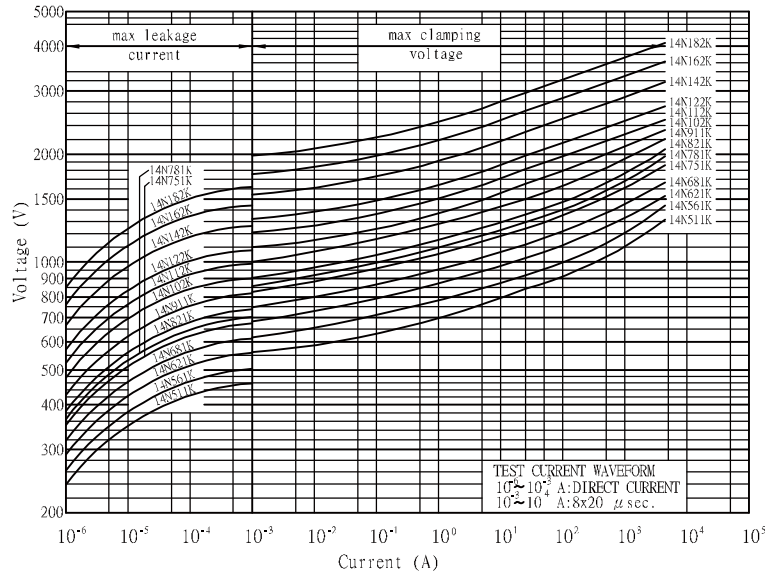


Ø 20mm


Rating and Characteristics

Part No.	Varistor Voltage at 1mA		Maximum Allowable Voltage		Maximum Clamping Voltage		Withstanding Surge Current (8/20us)	Nominal Discharge Current (8/20us)	Rated Wattage	Energy (10/1000us)	Certification		
	DC (V)	Tolerance	AC rms (V)	DC (V)	V@ ic (V)	ic (A)	1 Time (A)	In (KA)	(W)	(J)			
JVZ 20N 220M	22	±20%	14	18	43	20	2000	2	0.2	8	☆	☆	☆
JVZ 20N 270M	27	±20%	17	22	53	20	2000	2	0.2	10	☆	☆	☆
JVZ 20N 330M	33	±20%	20	26	65	20	2000	2	0.2	12	☆	☆	☆
JVZ 20N 390L	39	±15%	25	31	77	20	2000	2	0.2	14	☆	☆	☆
JVZ 20N 470L	47	±15%	30	38	93	20	2000	2	0.2	17	☆	☆	☆
JVZ 20N 560L	56	±15%	35	45	110	20	2000	2	0.2	20	☆	☆	☆
JVZ 20N 680L	68	±15%	40	56	135	20	2000	2	0.2	24	☆	☆	☆
JVZ 20N 820L	82	±15%	50	65	135	100	6500	5	1	44	☆	☆	☆
JVZ 20N 101K	100	±10%	60	85	165	100	6500	5	1	56	☆	☆	☆
JVZ 20N 121K	120	±10%	75	100	200	100	6500	5	1	64	☆	☆	☆
JVZ 20N 151K	150	±10%	95	125	250	100	6500	5	1	88	☆	☆	☆
JVZ 20N 181K	180	±10%	115	150	300	100	6500	5	1	104	☆	★	☆
JVZ 20N 201K	200	±10%	130	170	340	100	6500	5	1	114	☆	★	★
JVZ 20N 221K	220	±10%	140	180	360	100	6500	5	1	124	☆	★	★
JVZ 20N 241K	240	±10%	150	200	395	100	6500	5	1	134	☆	★	★
JVZ 20N 271K	270	±10%	175	225	455	100	6500	5	1	158	☆	★	★
JVZ 20N 301K	300	±10%	195	250	505	100	6500	5	1	168	☆	★	★
JVZ 20N 331K	330	±10%	210	275	550	100	6500	5	1	184	☆	★	★
JVZ 20N 361K	360	±10%	230	300	595	100	6500	5	1	208	☆	★	★
JVZ 20N 391K	390	±10%	250	320	650	100	6500	5	1	240	☆	★	★
JVZ 20N 431K	430	±10%	275	350	710	100	6500	5	1	264	☆	★	★
JVZ 20N 471K	470	±10%	300	385	775	100	6500	5	1	280	☆	★	★
JVZ 20N 511K	510	±10%	320	418	842	100	6500	5	1	296	☆	★	★
JVZ 20N 561K	560	±10%	350	460	920	100	6500	5	1	312	☆	★	★
JVZ 20N 621K	620	±10%	385	505	1025	100	6500	5	1	328	☆	★	★
JVZ 20N 681K	680	±10%	420	560	1120	100	6500	5	1	344	☆	★	★
JVZ 20N 751K	750	±10%	460	615	1240	100	6500	5	1	360	☆	★	★
JVZ 20N 781K	780	±10%	485	640	1290	100	6500	5	1	368	☆	★	★
JVZ 20N 821K	820	±10%	510	670	1355	100	6500	5	1	376	☆	★	★
JVZ 20N 911K	910	±10%	550	745	1500	100	6500	5	1	408	☆	★	★
JVZ 20N 102K	1000	±10%	625	825	1650	100	6500	5	1	448	☆	★	★
JVZ 20N 112K	1100	±10%	680	895	1815	100	6500	5	1	496	☆	★	★


PULSE LIFETIME RATINGS- 20mm
20N220M~20N680L

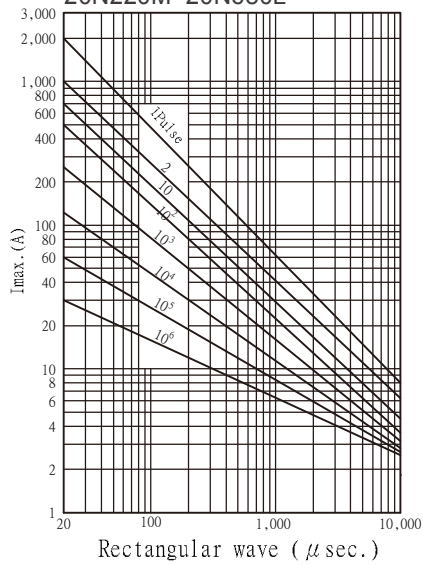


V-I CHARACTERISTIC CURVE -20mm
20N220M~20N680L

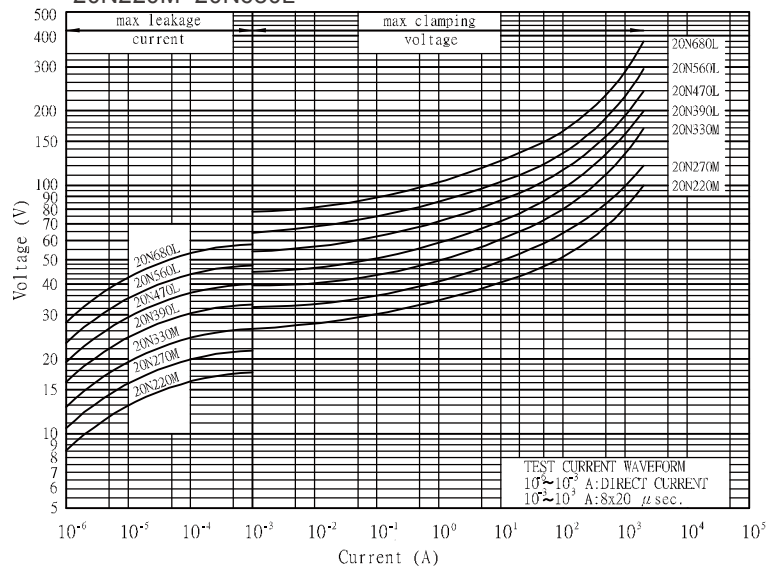


20N820L~20N471K

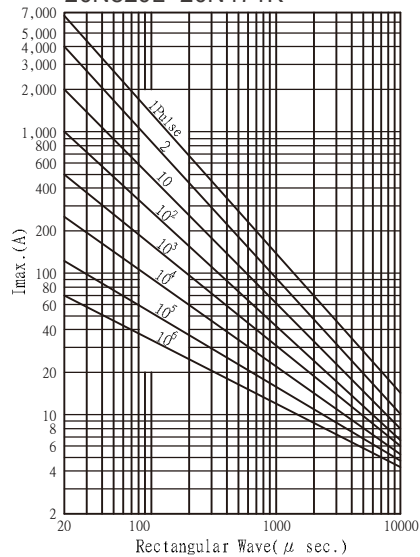


20N820L~20N471K

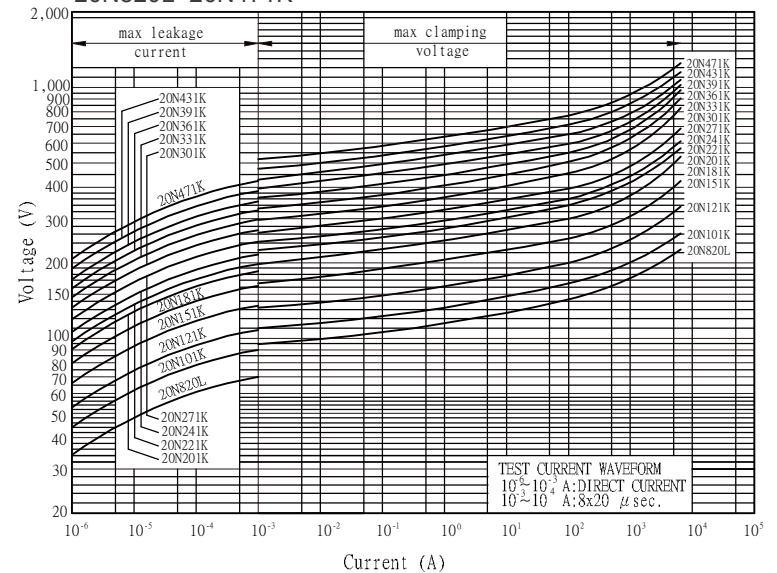

20N511K~20N182K

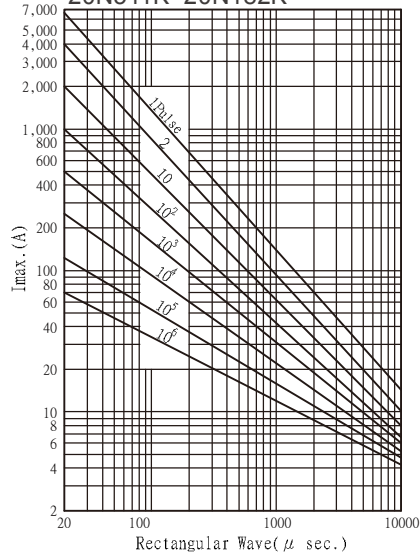





20N511K~20N182K

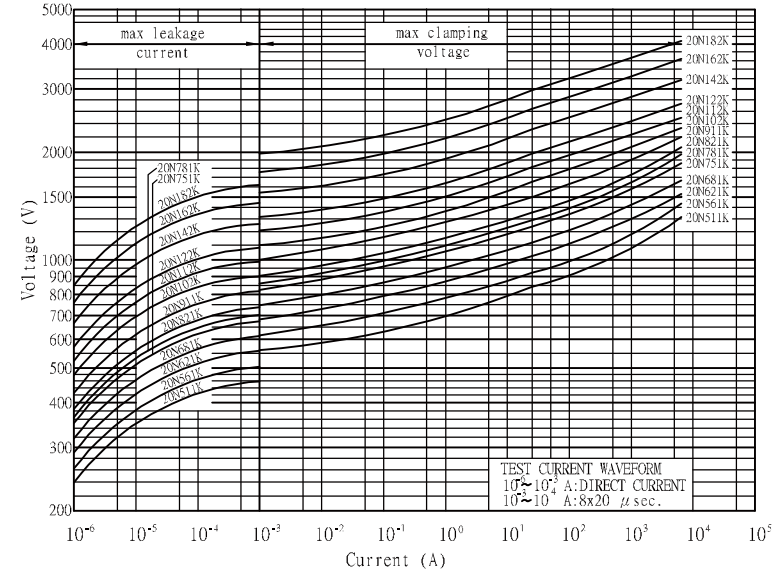

Ø 25mm

Rating and Characteristic

Part No.	Varistor Voltage at 1mA		Maximum Allowable Voltage		Maximum Clamping Voltage		Withstanding Surge Current (8/20us)	Nominal Discharge Current (8/20us)	Rated Wattage	Energy (10/1000us)	Certification	
	DC (V)	Tolerance	AC rms (V)	DC (V)	V@ ic (V)	ic (A)	1 Time (A)	In (KA)	(W)	(J)		
JVZ 25N 201K	200	±10%	130	170	355	150	20000	5	1.2	190	☆	★
JVZ 25N 221K	220	±10%	140	180	380	150	20000	5	1.2	205	☆	★
JVZ 25N 241K	240	±10%	150	200	415	150	20000	5	1.2	225	☆	★
JVZ 25N 271K	270	±10%	175	225	445	150	20000	5	1.2	255	☆	★
JVZ 25N 301K	300	±10%	195	250	495	150	20000	5	1.2	280	☆	★
JVZ 25N 331K	330	±10%	210	275	545	150	20000	5	1.2	305	☆	★
JVZ 25N 361K	360	±10%	230	300	595	150	20000	5	1.2	330	☆	★
JVZ 25N 391K	390	±10%	250	320	645	150	20000	5	1.2	360	☆	★
JVZ 25N 431K	430	±10%	275	350	710	150	20000	5	1.2	380	☆	★
JVZ 25N 471K	470	±10%	300	385	775	150	20000	5	1.2	400	☆	★
JVZ 25N 511K	510	±10%	320	418	840	150	20000	5	1.2	420	☆	★
JVZ 25N 561K	560	±10%	350	460	925	150	20000	5	1.2	440	☆	★
JVZ 25N 621K	620	±10%	385	505	1025	150	20000	5	1.2	460	☆	★
JVZ 25N 681K	680	±10%	420	560	1125	150	20000	5	1.2	480	☆	★
JVZ 25N 751K	750	±10%	460	615	1240	150	20000	5	1.2	520	☆	★
JVZ 25N 781K	780	±10%	485	640	1290	150	20000	5	1.2	540	☆	★
JVZ 25N 821K	820	±10%	510	670	1360	150	20000	5	1.2	570	☆	★
JVZ 25N 911K	910	±10%	550	745	1500	150	20000	5	1.2	620	☆	★

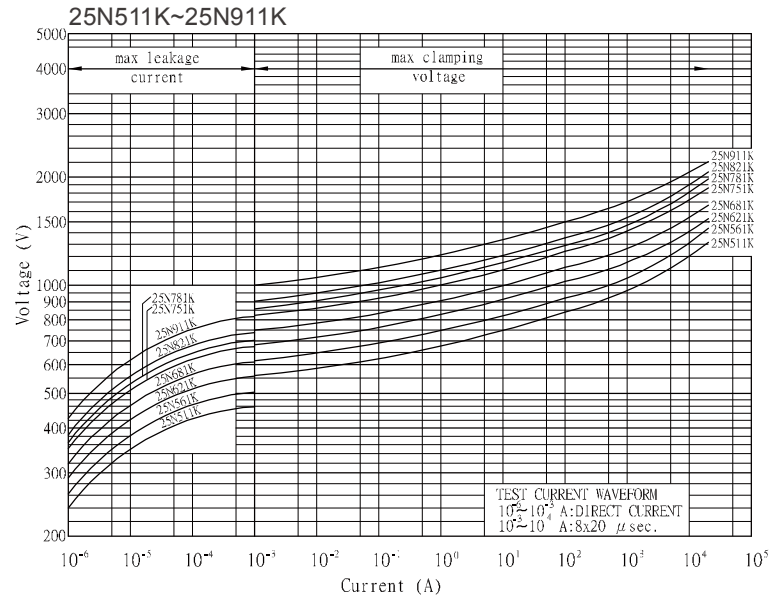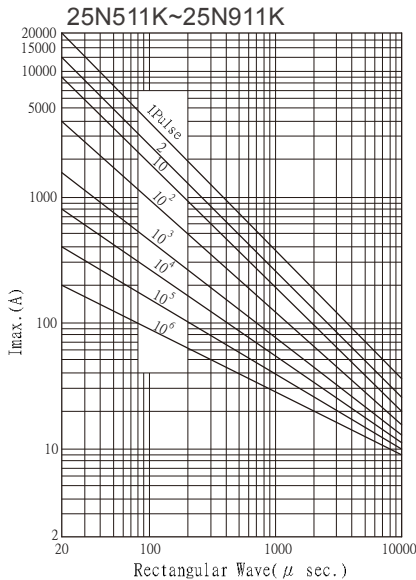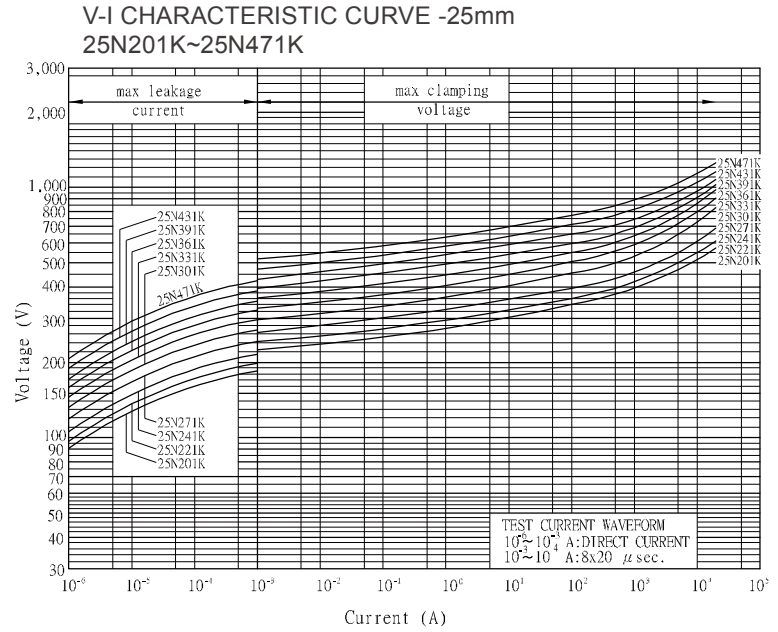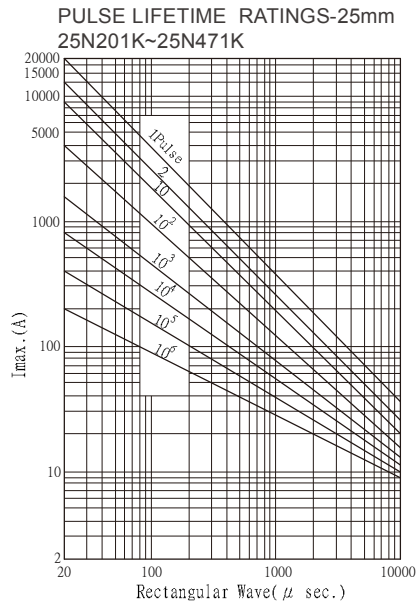

JVZ Series Operating Temperature 105°C

High Surge Series Specification

Agency Approvals


Agency	UL	CUL	VDE		CQC	
Agency Approvals	4 TH Edition	CSA 22.2 No. 269.5-17	IEC61051-1 IEC61051-2 IEC61051-2-2	IEC61051-1 IEC61051-2 IEC61051-2-2 IEC62368-1: 2018 / G.8.1	GB/T10193-1997 GB/T10194-1997	GB4943.1-2011 GB/T10193-1997 GB/T10194-1997 GB8898-2011
Title	Transient Voltage Surge Suppressors	Transient Voltage Surge Suppressors	Varistors for use in electronic equipment		Engaged in Voluntary Product Certification	
File No.	VZCA2.E325508	VZCA8.E325508	40004658		CQC19001230701/703/704/705/706	
Symbols	☆		☆	★	☆	⊗

Ø 5mm


Rating and Characteristics

Part No.	Varistor Voltage at 0.1mA		Maximum Allowable Voltage		Maximum Clamping Voltage		Withstanding Surge Current (8/20us)	Nominal Discharge Current (8/20us)	Rated Wattage	Energy (10/1000us)	Certification
	DC (V)	Tolerance	AC rms (V)	DC (V)	V@ ic (V)	ic (A)	1 Time (A)	In (KA)	(W)	(J)	  
JVZ 05S 180M	18	±20%	11	14	40	1	250	0.1	0.01	0.7	☆ ☆ ☆
JVZ 05S 220L	22	±15%	14	18	48	1	250	0.1	0.01	0.8	☆ ☆ ☆
JVZ 05S 270K	27	±10%	17	22	60	1	250	0.1	0.01	1.1	☆ ☆ ☆
JVZ 05S 330K	33	±10%	20	26	73	1	250	0.1	0.01	1.3	☆ ☆ ☆
JVZ 05S 390K	39	±10%	25	31	86	1	250	0.1	0.01	1.5	☆ ☆ ☆
JVZ 05S 470K	47	±10%	30	38	104	1	250	0.1	0.01	1.8	☆ ☆ ☆
JVZ 05S 560K	56	±10%	35	45	123	1	250	0.1	0.01	2.2	☆ ☆ ☆
JVZ 05S 680K	68	±10%	40	56	150	1	250	0.1	0.01	2.6	☆ ☆ ☆
JVZ 05S 820K	82	±10%	50	65	145	5	800	0.1	0.1	3.5	☆ ☆ ☆
JVZ 05S 101K	100	±10%	60	85	175	5	800	0.1	0.1	4.5	☆ ☆ ☆
JVZ 05S 121K	120	±10%	75	100	210	5	800	0.1	0.1	5.5	☆ ☆ ☆
JVZ 05S 151K	150	±10%	95	125	260	5	800	0.1	0.1	6.5	☆ ☆ ☆
JVZ 05S 181K	180	±10%	115	150	320	5	800	0.1	0.1	8.0	☆ ☆ ☆
JVZ 05S 201K	200	±10%	130	170	355	5	800	0.1	0.1	8.5	☆ ☆ ☆
JVZ 05S 221K	220	±10%	140	180	380	5	800	0.1	0.1	9.0	☆ ☆ ☆
JVZ 05S 241K	240	±10%	150	200	415	5	800	0.1	0.1	10.5	☆ ☆ ☆
JVZ 05S 271K	270	±10%	175	225	475	5	800	0.1	0.1	11	☆ ☆ ☆
JVZ 05S 301K	300	±10%	195	250	525	5	800	0.1	0.1	12.0	☆ ☆ ☆
JVZ 05S 331K	330	±10%	210	275	575	5	800	0.1	0.1	13	☆ ☆ ☆
JVZ 05S 361K	360	±10%	230	300	620	5	800	0.1	0.1	16	☆ ☆ ☆
JVZ 05S 391K	390	±10%	250	320	675	5	800	0.1	0.1	17	☆ ☆ ☆
JVZ 05S 431K	430	±10%	275	350	745	5	800	0.1	0.1	20	☆ ☆ ☆
JVZ 05S 471K	470	±10%	300	385	810	5	800	0.1	0.1	21	☆ ☆ ☆
JVZ 05S 511K	510	±10%	320	418	880	5	800	0.1	0.1	22	☆ ☆ ☆
JVZ 05S 561K	560	±10%	350	460	940	5	800	0.1	0.1	25	☆ ☆ ☆
JVZ 05S 621K	620	±10%	385	505	1050	5	800	0.1	0.1	27	☆ ☆ ☆
JVZ 05S 681K	680	±10%	420	560	1150	5	800	0.1	0.1	28	☆ ☆ ☆
JVZ 05S 751K	750	±10%	460	615	1290	5	800	0.1	0.1	29	☆ ☆ ☆


PULSE LIFETIME RATINGS- 5mm
05S180M~05680K

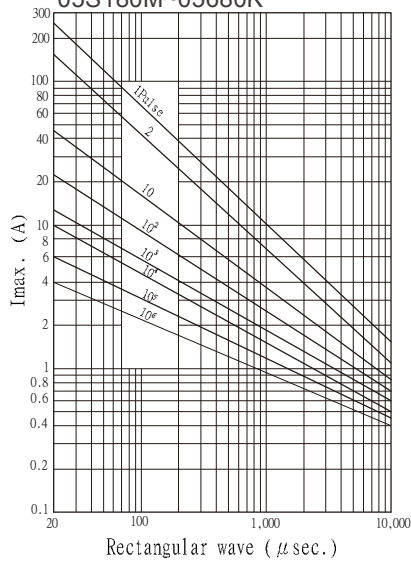


V-I CHARACTERISTIC CURVE - 5mm
05S180M~05680K

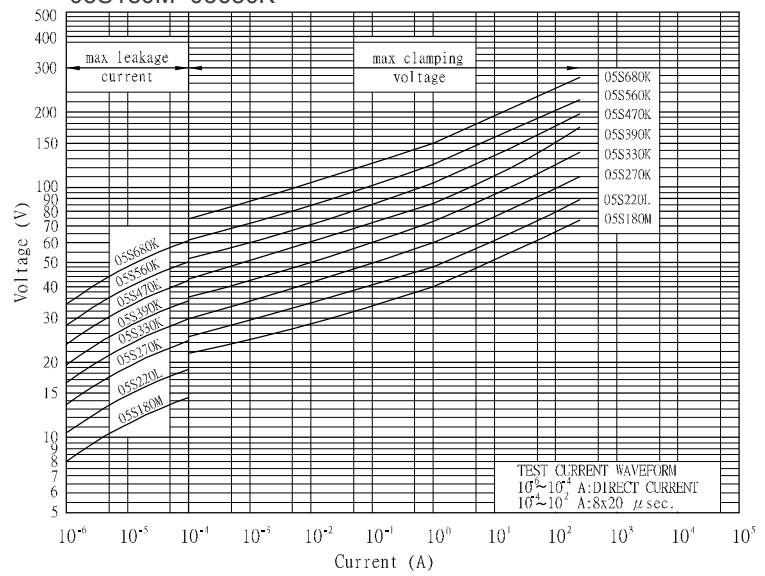

05S820K~05S751K

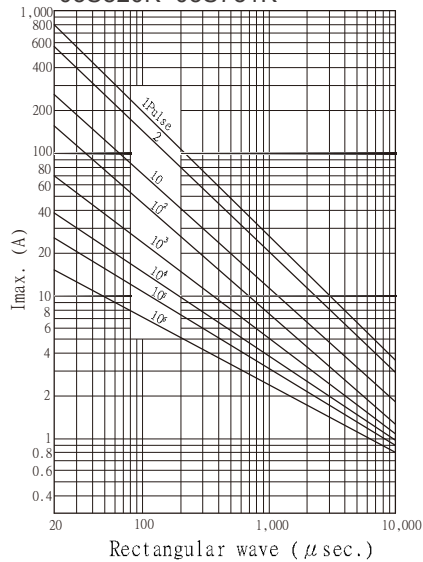

05S820K~05S751K

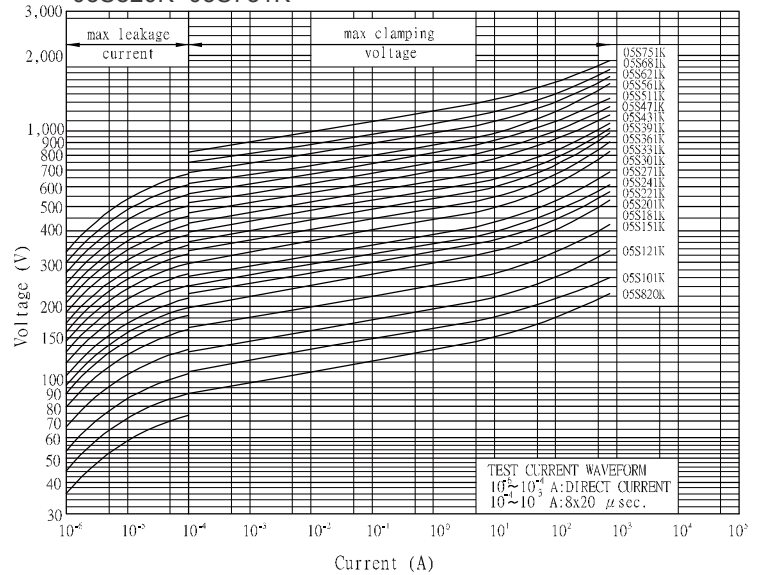


Ø 7mm

Rating and Characteristics


Part No.	Varistor Voltage at 1mA		Maximum Allowable Voltage		Maximum Clamping Voltage		Withstanding Surge Current (8/20us)	Nominal Discharge Current (8/20us)	Rated Wattage	Energy (10/1000us)	Certification
	DC (V)	Tolerance	AC rms (V)	DC (V)	V@ ic (V)	ic (A)	1 Time (A)	In (KA)	(W)	(J)	  
JVZ 07S 180M	18	±20%	11	14	40	2.5	500	0.25	0.02	1.5	☆☆☆
JVZ 07S 220L	22	±15%	14	18	48	2.5	500	0.25	0.02	1.7	☆☆☆
JVZ 07S 270K	27	±10%	17	22	60	2.5	500	0.25	0.02	2.1	☆☆☆
JVZ 07S 330K	33	±10%	20	26	73	2.5	500	0.25	0.02	2.8	☆☆☆
JVZ 07S 390K	39	±10%	25	31	86	2.5	500	0.25	0.02	3.0	☆☆☆
JVZ 07S 470K	47	±10%	30	38	104	2.5	500	0.25	0.02	3.8	☆☆☆
JVZ 07S 560K	56	±10%	35	45	123	2.5	500	0.25	0.02	4.4	☆☆☆
JVZ 07S 680K	68	±10%	40	56	150	2.5	500	0.25	0.02	5.4	☆☆☆
JVZ 07S 820K	82	±10%	50	65	145	10	1750	1.0	0.25	7.0	☆☆☆
JVZ 07S 101K	100	±10%	60	85	175	10	1750	1.0	0.25	9.0	☆☆☆
JVZ 07S 121K	120	±10%	75	100	210	10	1750	1.0	0.25	11	☆☆☆
JVZ 07S 151K	150	±10%	95	125	260	10	1750	1.0	0.25	13	☆☆☆
JVZ 07S 181K	180	±10%	115	150	320	10	1750	1.0	0.25	16	☆☆☆
JVZ 07S 201K	200	±10%	130	170	355	10	1750	1.0	0.25	17.5	☆☆☆
JVZ 07S 221K	220	±10%	140	180	380	10	1750	1.0	0.25	19	☆☆☆
JVZ 07S 241K	240	±10%	150	200	415	10	1750	1.0	0.25	21	☆☆☆
JVZ 07S 271K	270	±10%	175	225	475	10	1750	1.0	0.25	24	☆☆☆
JVZ 07S 301K	300	±10%	195	250	525	10	1750	1.0	0.25	26	☆☆☆
JVZ 07S 331K	330	±10%	210	275	575	10	1750	1.0	0.25	28	☆☆☆
JVZ 07S 361K	360	±10%	230	300	620	10	1750	1.0	0.25	32	☆☆☆
JVZ 07S 391K	390	±10%	250	320	675	10	1750	1.0	0.25	35	☆☆☆
JVZ 07S 431K	430	±10%	275	350	745	10	1750	1.0	0.25	40	☆☆☆
JVZ 07S 471K	470	±10%	300	385	810	10	1750	1.0	0.25	42	☆☆☆
JVZ 07S 511K	510	±10%	320	418	880	10	1750	1.0	0.25	45	☆☆☆
JVZ 07S 561K	560	±10%	350	460	940	10	1750	1.0	0.25	51	☆☆☆
JVZ 07S 621K	620	±10%	385	505	1050	10	1750	1.0	0.25	54	☆☆☆
JVZ 07S 681K	680	±10%	420	560	1150	10	1750	1.0	0.25	56	☆☆☆
JVZ 07S 751K	750	±10%	460	615	1290	10	1750	1.0	0.25	58	☆☆☆
JVZ 07S 781K	780	±10%	485	640	1290	10	1750	1.0	0.25	59	☆☆☆
JVZ 07S 821K	820	±10%	510	670	1355	10	1750	1.0	0.25	60	☆☆☆




PULSE LIFETIME RATINGS- 7mm
07S180M~07S680K

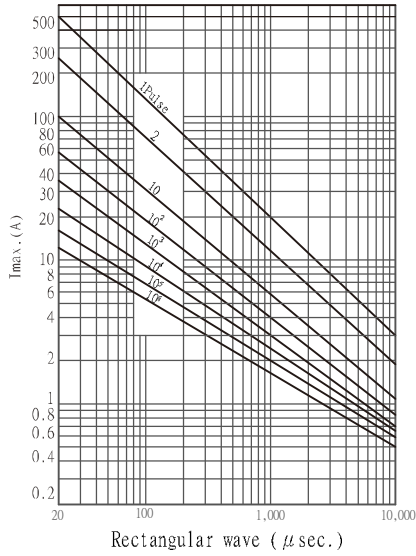


V-I CHARACTERISTIC CURVE -7mm
07S180M~07S680K

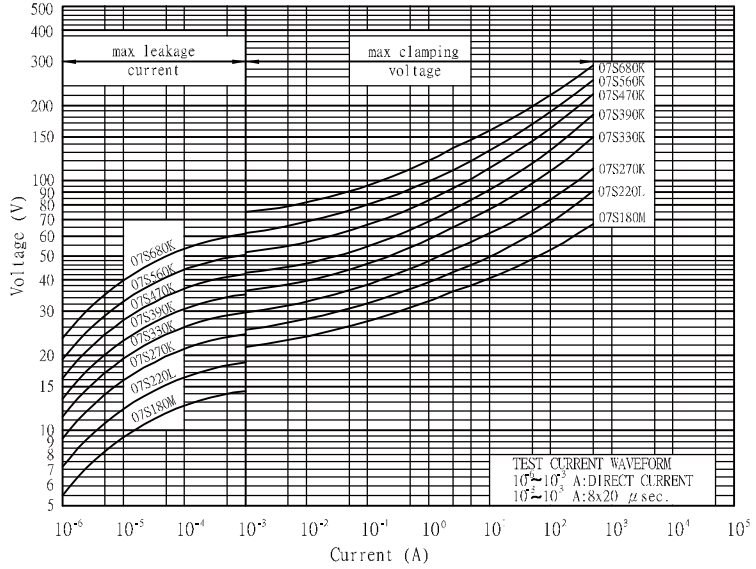

07S820K~07S821K

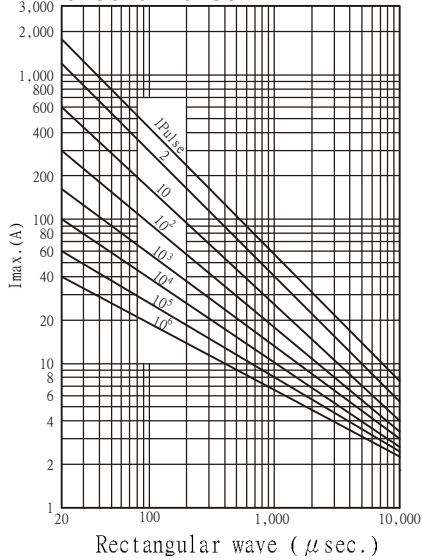

07S820K~07S821K

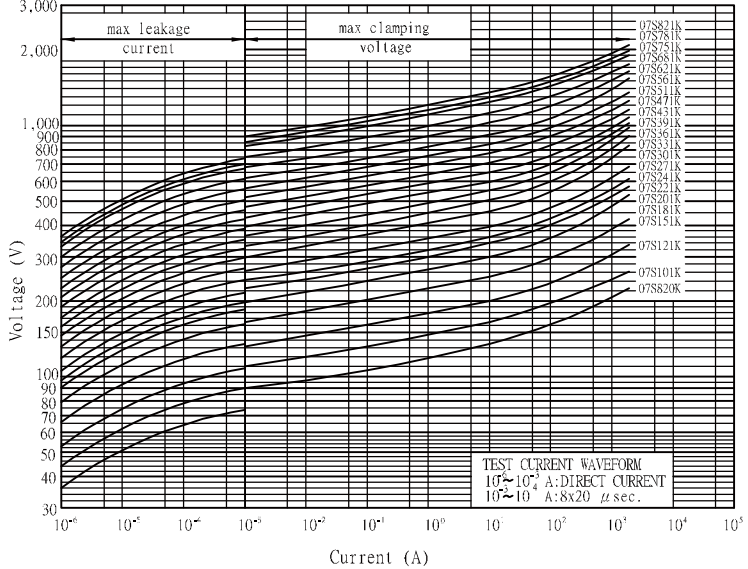


Ø 10mm


Rating and Characteristics

Part No.	Varistor Voltage at 1mA		Maximum Allowable Voltage		Maximum Clamping Voltage		Withstanding Surge Current (8/20us)	Nominal Discharge Current (8/20us)	Rated Wattage	Energy (10/1000us)	Certification		
	DC (V)	Tolerance	AC rms (V)	DC (V)	V@ ic (V)	ic (A)	1 Time (A)	In (KA)	(W)	(J)			
JVZ 10S 180M	18	±20%	11	14	36	5	1000	0.5	0.05	2.6	☆	☆	☆
JVZ 10S 220L	22	±15%	14	18	43	5	1000	0.5	0.05	3.2	☆	☆	☆
JVZ 10S 270K	27	±10%	17	22	53	5	1000	0.5	0.05	3.9	☆	☆	☆
JVZ 10S 330K	33	±10%	20	26	65	5	1000	0.5	0.05	4.8	☆	☆	☆
JVZ 10S 390K	39	±10%	25	31	77	5	1000	0.5	0.05	5.6	☆	☆	☆
JVZ 10S 470K	47	±10%	30	38	93	5	1000	0.5	0.05	6.8	☆	☆	☆
JVZ 10S 560K	56	±10%	35	45	110	5	1000	0.5	0.05	8.1	☆	☆	☆
JVZ 10S 680K	68	±10%	40	56	135	5	1000	0.5	0.05	9.8	☆	☆	☆
JVZ 10S 820K	82	±10%	50	65	135	25	3500	1.5	0.4	14	☆	☆	☆
JVZ 10S 101K	100	±10%	60	85	165	25	3500	1.5	0.4	18	☆	☆	☆
JVZ 10S 121K	120	±10%	75	100	200	25	3500	1.5	0.4	22	☆	☆	☆
JVZ 10S 151K	150	±10%	95	125	250	25	3500	1.5	0.4	25	☆	☆	☆
JVZ 10S 181K	180	±10%	115	150	300	25	3500	1.5	0.4	32	☆	★	☆
JVZ 10S 201K	200	±10%	130	170	340	25	3500	1.5	0.4	35	☆	★	★
JVZ 10S 221K	220	±10%	140	180	360	25	3500	1.5	0.4	39	☆	★	★
JVZ 10S 241K	240	±10%	150	200	395	25	3500	1.5	0.4	42	☆	★	★
JVZ 10S 271K	270	±10%	175	225	455	25	3500	1.5	0.4	49	☆	★	★
JVZ 10S 301K	300	±10%	195	250	505	25	3500	1.5	0.4	52	☆	★	★
JVZ 10S 331K	330	±10%	210	275	550	25	3500	1.5	0.4	58	☆	★	★
JVZ 10S 361K	360	±10%	230	300	595	25	3500	1.5	0.4	65	☆	★	★
JVZ 10S 391K	390	±10%	250	320	650	25	3500	1.5	0.4	70	☆	★	★
JVZ 10S 431K	430	±10%	275	350	710	25	3500	1.5	0.4	80	☆	★	★
JVZ 10S 471K	470	±10%	300	385	775	25	3500	1.5	0.4	85	☆	★	★
JVZ 10S 511K	510	±10%	320	418	842	25	3500	1.5	0.4	92	☆	★	★
JVZ 10S 561K	560	±10%	350	460	920	25	3500	1.5	0.4	102	☆	★	★
JVZ 10S 621K	620	±10%	385	505	1025	25	3500	1.5	0.4	107	☆	★	★
JVZ 10S 681K	680	±10%	420	560	1120	25	3500	1.5	0.4	112	☆	★	★
JVZ 10S 751K	750	±10%	460	615	1240	25	3500	1.5	0.4	115	☆	★	★
JVZ 10S 781K	780	±10%	485	640	1290	25	3500	1.5	0.4	116	☆	★	★
JVZ 10S 821K	820	±10%	510	670	1355	25	3500	1.5	0.4	118	☆	★	★
JVZ 10S 911K	910	±10%	550	745	1500	25	3500	1.5	0.4	127	☆	★	★
JVZ 10S 102K	1000	±10%	625	825	1650	25	3500	1.5	0.4	140	☆	★	★
JVZ 10S 112K	1100	±10%	680	895	1815	25	3500	1.5	0.4	155	☆	★	★


PULSE LIFETIME RATINGS- 10mm
10S180M~10S680K

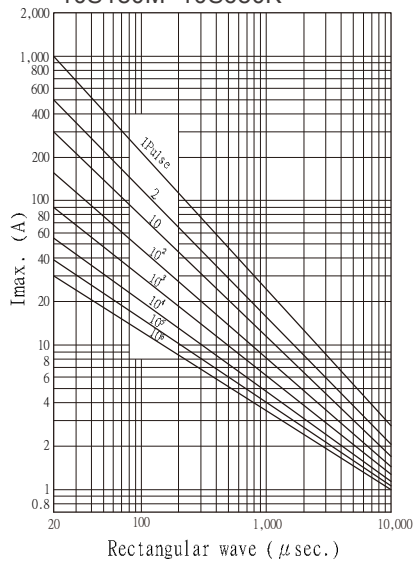


V-I CHARACTERISTIC CURVE -10mm
10S180M~10S680K

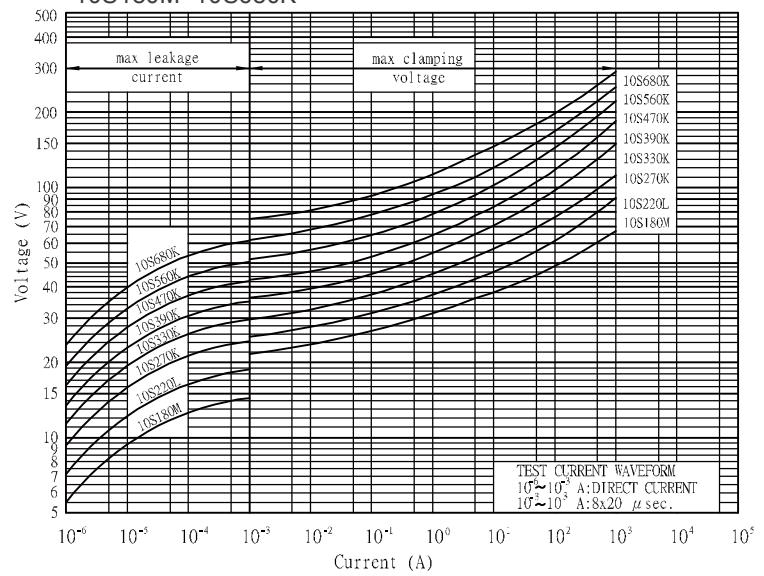


10S820K~10S471K

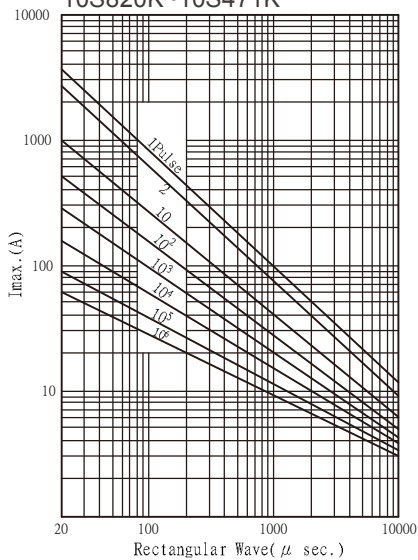


10S820K~10S471K

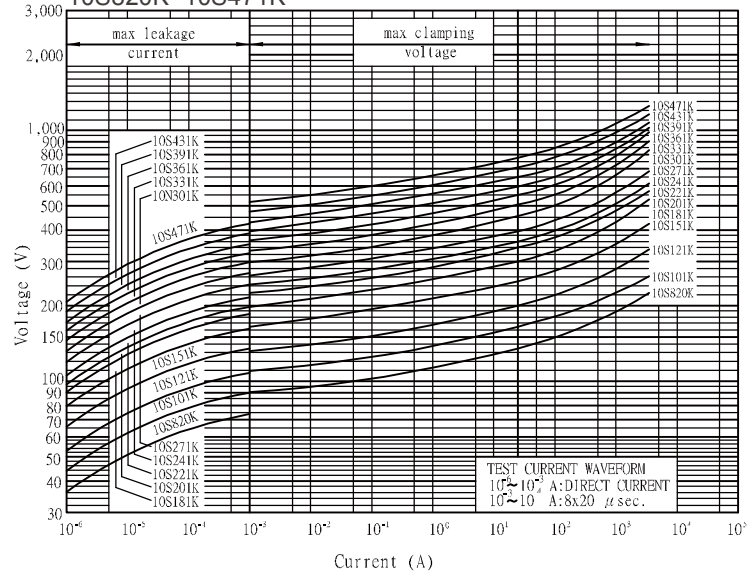

10S511K~10S182K

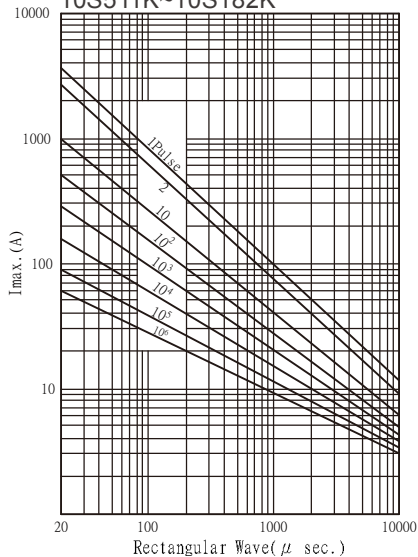

10S511K~10S182K

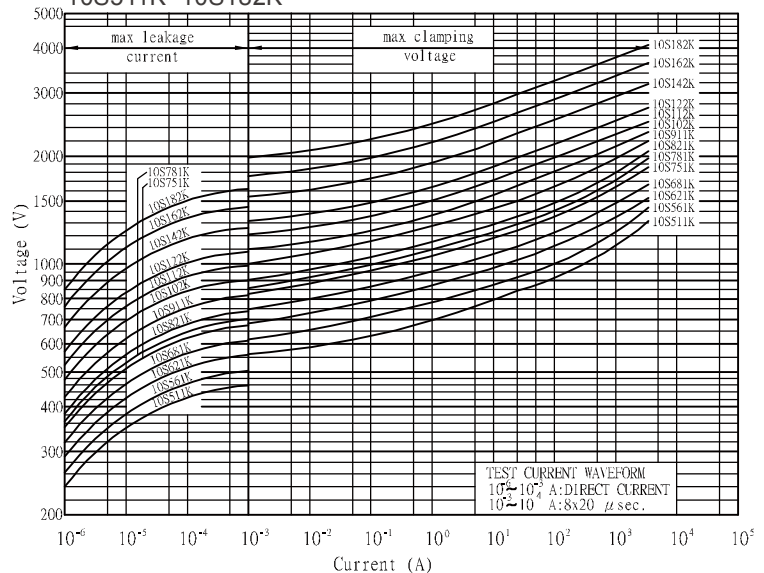

Ø 14mm

Rating and Characteristics

Part No.	Varistor Voltage at 1mA		Maximum Allowable Voltage		Maximum Clamping Voltage		Withstanding Surge Current (8/20us)	Nominal Discharge Current (8/20us)	Rated Wattage	Energy (10/1000us)	Certification		
	DC (V)	Tolerance	AC rms (V)	DC (V)	V@ ic (V)	ic (A)	1 Time (A)	In (KA)	(W)	(J)			
JVZ 14S 180M	18	±20%	11	14	36	10	2000	1	0.1	5.2	☆	★	★
JVZ 14S 220L	22	±15%	14	18	43	10	2000	1	0.1	6.3	☆	★	★
JVZ 14S 270K	27	±10%	17	22	53	10	2000	1	0.1	7.8	☆	★	★
JVZ 14S 330K	33	±10%	20	26	65	10	2000	1	0.1	9.5	☆	★	★
JVZ 14S 390K	39	±10%	25	31	77	10	2000	1	0.1	11	☆	★	★
JVZ 14S 470K	47	±10%	30	38	93	10	2000	1	0.1	14	☆	★	★
JVZ 14S 560K	56	±10%	35	45	110	10	2000	1	0.1	16	☆	★	★
JVZ 14S 680K	68	±10%	40	56	135	10	2000	1	0.1	20	☆	★	★
JVZ 14S 820K	82	±10%	50	65	135	50	6000	3	0.6	28	☆	★	★
JVZ 14S 101K	100	±10%	60	85	165	50	6000	3	0.6	36	☆	★	★
JVZ 14S 121K	120	±10%	75	100	200	50	6000	3	0.6	44	☆	★	★
JVZ 14S 151K	150	±10%	95	125	250	50	6000	3	0.6	53	☆	★	★
JVZ 14S 181K	180	±10%	115	150	300	50	6000	3	0.6	65	☆	★	★
JVZ 14S 201K	200	±10%	130	170	340	50	6000	3	0.6	70	☆	★	★
JVZ 14S 221K	220	±10%	140	180	360	50	6000	3	0.6	78	☆	★	★
JVZ 14S 241K	240	±10%	150	200	395	50	6000	3	0.6	84	☆	★	★
JVZ 14S 271K	270	±10%	175	225	455	50	6000	3	0.6	99	☆	★	★
JVZ 14S 301K	300	±10%	195	250	505	50	6000	3	0.6	105	☆	★	★
JVZ 14S 331K	330	±10%	210	275	550	50	6000	3	0.6	115	☆	★	★
JVZ 14S 361K	360	±10%	230	300	595	50	6000	3	0.6	130	☆	★	★
JVZ 14S 391K	390	±10%	250	320	650	50	6000	3	0.6	140	☆	★	★
JVZ 14S 431K	430	±10%	275	350	710	50	6000	3	0.6	155	☆	★	★
JVZ 14S 471K	470	±10%	300	385	775	50	6000	3	0.6	175	☆	★	★
JVZ 14S 511K	510	±10%	320	418	842	50	6000	3	0.6	190	☆	★	★
JVZ 14S 561K	560	±10%	350	460	920	50	6000	3	0.6	205	☆	★	★
JVZ 14S 621K	620	±10%	385	505	1025	50	6000	3	0.6	215	☆	★	★
JVZ 14S 681K	680	±10%	420	560	1120	50	6000	3	0.6	225	☆	★	★
JVZ 14S 751K	750	±10%	460	615	1240	50	6000	3	0.6	230	☆	★	★
JVZ 14S 781K	780	±10%	485	640	1290	50	6000	3	0.6	233	☆	★	★
JVZ 14S 821K	820	±10%	510	670	1355	50	6000	3	0.6	235	☆	★	★
JVZ 14S 911K	910	±10%	550	745	1500	50	6000	3	0.6	255	☆	★	★
JVZ 14S 102K	1000	±10%	625	825	1650	50	6000	3	0.6	283	☆	★	★
JVZ 14S 112K	1100	±10%	680	895	1815	50	6000	3	0.6	310	☆	★	★



14S820K~14S471K

Y-axis: $I_{max.} (A)$ (logarithmic scale from 2 to 7,000)

X-axis: Rectangular Wave (μ sec.) (logarithmic scale from 20 to 10,000)

Curves labeled: 1 pulse, 10^{-1} , 10^{-2} , 10^{-3} , 10^{-4} , 10^{-5} , 10^{-6}

14S511K~14S182K

$I_{max.} (A)$







Rectangular Wave (μ sec.)

10^{-1} sec
 10^{-2} sec
 10^{-3} sec
 10^{-4} sec
 10^{-5} sec
 10^{-6} sec

Ø 20mm

Rating and Characteristics

Part No.	Varistor Voltage at 1mA		Maximum Allowable Voltage		Maximum Clamping Voltage		Withstanding Surge Current (8/20us)	Nominal Discharge Current (8/20us)	Rated Wattage	Energy (10/1000us)	Certification		
	DC (V)	Tolerance	AC rms (V)	DC (V)	V@ ic (V)	ic (A)	1 Time (A)	In (KA)	(W)	(J)			
JVZ 20S 220M	22	±20%	14	18	43	20	3000	2	0.2	16	☆	☆	☆
JVZ 20S 270M	27	±20%	17	22	53	20	3000	2	0.2	19	☆	☆	☆
JVZ 20S 330M	33	±20%	20	26	65	20	3000	2	0.2	24	☆	☆	☆
JVZ 20S 390L	39	±15%	25	31	77	20	3000	2	0.2	28	☆	☆	☆
JVZ 20S 470L	47	±15%	30	38	93	20	3000	2	0.2	34	☆	☆	☆
JVZ 20S 560L	56	±15%	35	45	110	20	3000	2	0.2	41	☆	☆	☆
JVZ 20S 680L	68	±15%	40	56	135	20	3000	2	0.2	49	☆	☆	☆
JVZ 20S 820L	82	±15%	50	65	135	100	10000	5	1	56	☆	☆	☆
JVZ 20S 101K	100	±10%	60	85	165	100	10000	5	1	72	☆	☆	☆
JVZ 20S 121K	120	±10%	75	100	200	100	10000	5	1	88	☆	☆	☆
JVZ 20S 151K	150	±10%	95	125	250	100	10000	5	1	106	☆	☆	☆
JVZ 20S 181K	180	±10%	115	150	300	100	10000	5	1	130	☆	★	☆
JVZ 20S 201K	200	±10%	130	170	340	100	10000	5	1	140	☆	★	★
JVZ 20S 221K	220	±10%	140	180	360	100	10000	5	1	155	☆	★	★
JVZ 20S 241K	240	±10%	150	200	395	100	10000	5	1	168	☆	★	★
JVZ 20S 271K	270	±10%	175	225	455	100	10000	5	1	190	☆	★	★
JVZ 20S 301K	300	±10%	195	250	505	100	10000	5	1	210	☆	★	★
JVZ 20S 331K	330	±10%	210	275	550	100	10000	5	1	228	☆	★	★
JVZ 20S 361K	360	±10%	230	300	595	100	10000	5	1	255	☆	★	★
JVZ 20S 391K	390	±10%	250	320	650	100	10000	5	1	275	☆	★	★
JVZ 20S 431K	430	±10%	275	350	710	100	10000	5	1	303	☆	★	★
JVZ 20S 471K	470	±10%	300	385	775	100	10000	5	1	350	☆	★	★
JVZ 20S 511K	510	±10%	320	418	842	100	10000	5	1	382	☆	★	★
JVZ 20S 561K	560	±10%	350	460	920	100	10000	5	1	410	☆	★	★
JVZ 20S 621K	620	±10%	385	505	1025	100	10000	5	1	420	☆	★	★
JVZ 20S 681K	680	±10%	420	560	1120	100	10000	5	1	430	☆	★	★
JVZ 20S 751K	750	±10%	460	615	1240	100	10000	5	1	440	☆	★	★
JVZ 20S 781K	780	±10%	485	640	1290	100	10000	5	1	450	☆	★	★
JVZ 20S 821K	820	±10%	510	670	1355	100	10000	5	1	460	☆	★	★
JVZ 20S 911K	910	±10%	550	745	1500	100	10000	5	1	510	☆	★	★
JVZ 20S 102K	1000	±10%	625	825	1650	100	10000	5	1	566	☆	★	★
JVZ 20S 112K	1100	±10%	680	895	1815	100	10000	5	1	620	☆	★	★

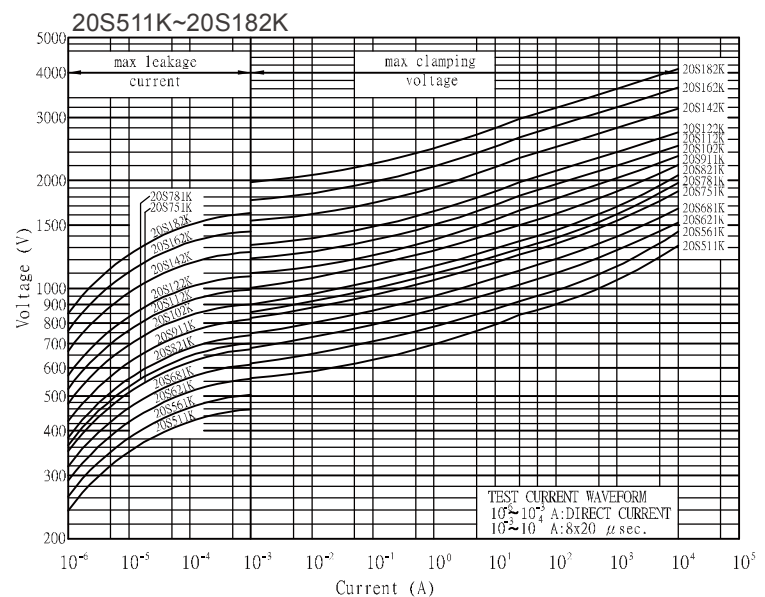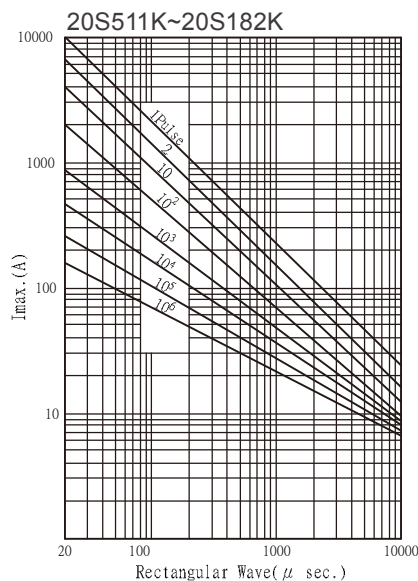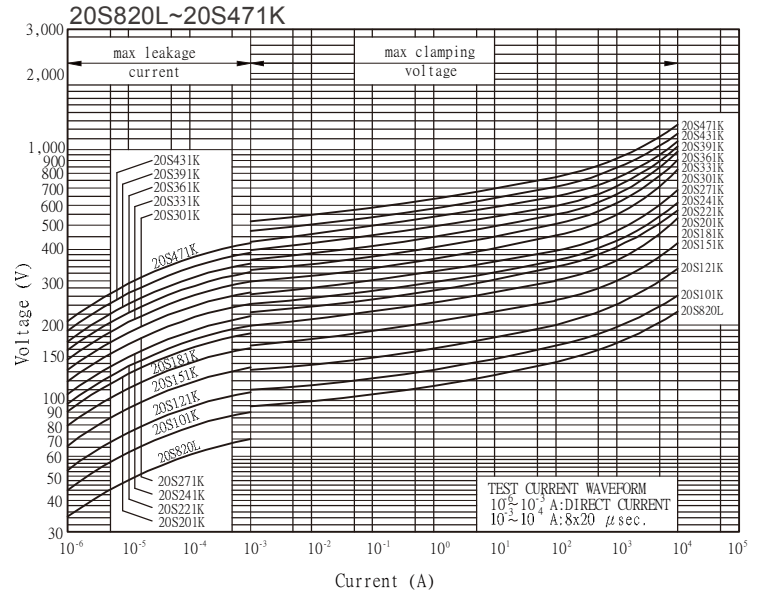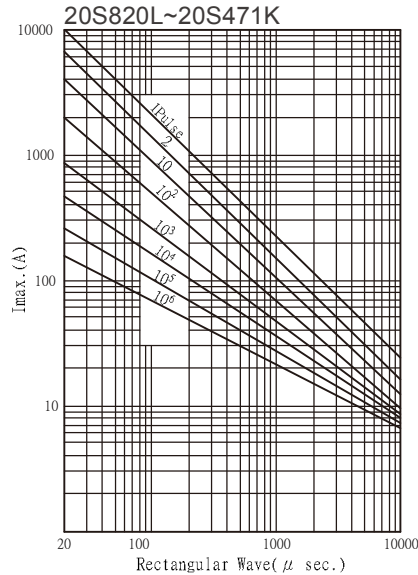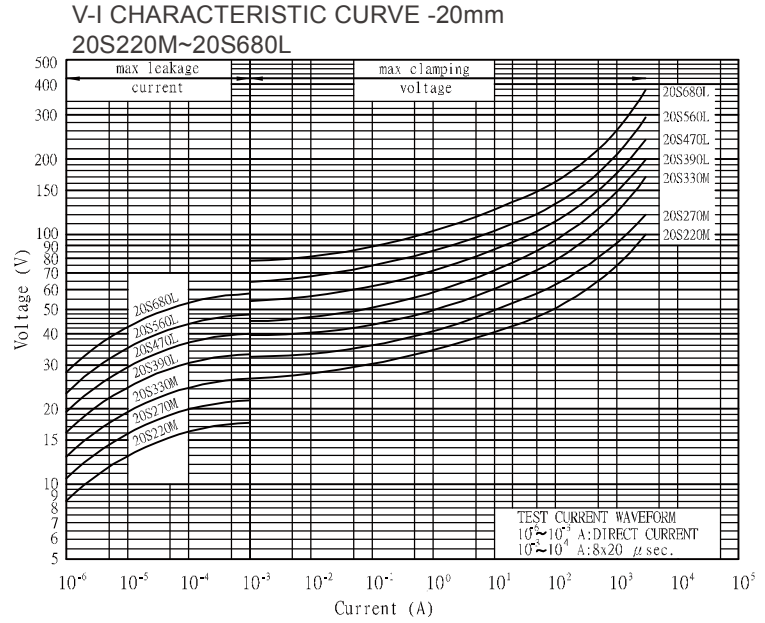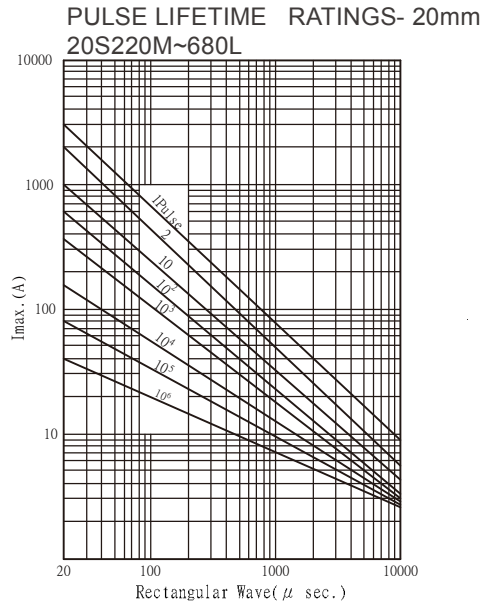

JVZ Series Operating Temperature 105°C

Ultra Surge Series Specification

Agency Approvals


Agency	UL	CUL	VDE		CQC	
Agency Approvals	4 TH Edition	CSA 22.2 No. 269.5-17	IEC61051-1 IEC61051-2 IEC61051-2-2	IEC61051-1 IEC61051-2 IEC61051-2-2 IEC62368-1: 2018 / G.8.1	GB/T10193-1997 GB/T10194-1997	GB4943.1-2011 GB/T10193-1997 GB/T10194-1997 GB8898-2011
Title	Transient Voltage Surge Suppressors	Transient Voltage Surge Suppressors	Varistors for use in electronic equipment		Engaged in Voluntary Product Certification	
File No.	VZCA2.E325508	VZCA8.E325508	40046994		CQC19001230701/703/704/705/706	
Symbols	☆		★	★	★	★

Ø 5mm


Rating and Characteristics

Part No.	Varistor Voltage at 0.1mA		Maximum Allowable Voltage		Maximum Clamping Voltage		Withstanding Surge Current (8/20us)	Nominal Discharge Current (8/20us)	Rated Wattage	Energy (10/1000us)	Certification
	DC (V)	Tolerance	AC rms (V)	DC (V)	V@ ic (V)	ic (A)					
JVZ 05U 180M	18	±20%	11	14	40	1	750	0.25	0.01	0.6	☆ ☆
JVZ 05U 220L	22	±15%	14	18	48	1	750	0.25	0.01	0.7	☆ ☆
JVZ 05U 270K	27	±10%	17	22	60	1	750	0.25	0.01	0.9	☆ ☆
JVZ 05U 330K	33	±10%	20	26	73	1	750	0.25	0.01	1.1	☆ ☆
JVZ 05U 390K	39	±10%	25	31	86	1	750	0.25	0.01	1.2	☆ ☆
JVZ 05U 470K	47	±10%	30	38	104	1	750	0.25	0.01	1.5	☆ ☆
JVZ 05U 560K	56	±10%	35	45	123	1	750	0.25	0.01	1.8	☆ ☆
JVZ 05U 680K	68	±10%	40	56	150	1	750	0.25	0.01	2.1	☆ ☆

PULSE LIFETIME RATINGS- 5mm
05U180M~05U680K

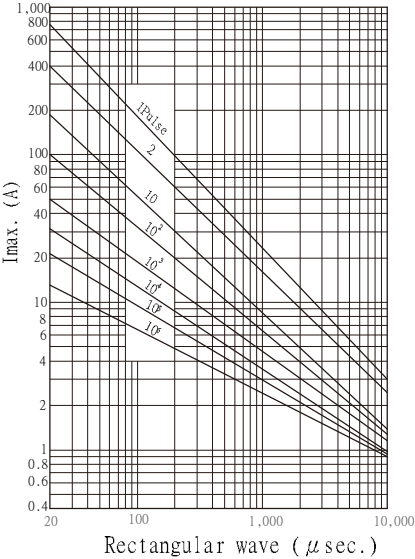

V-I CHARACTERISTIC CURVE -5mm
05U180M~05U680K

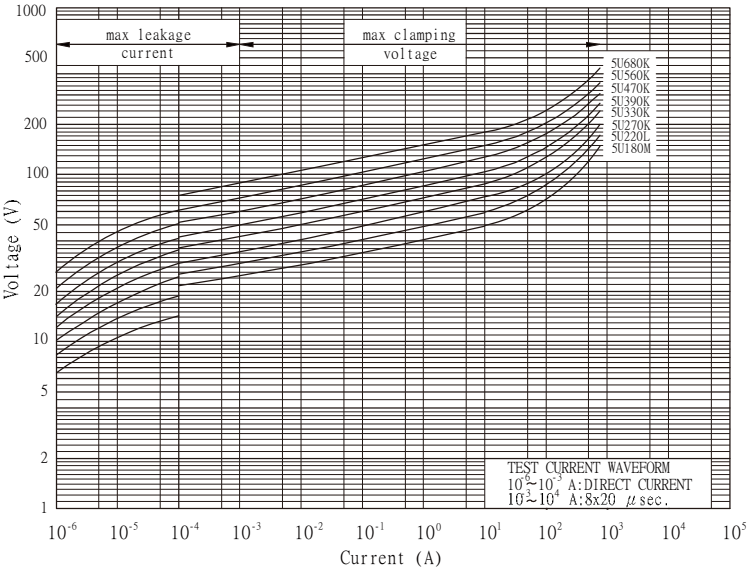


Ø 7mm


Rating and Characteristics

Part No.	Varistor Voltage at 1mA		Maximum Allowable Voltage		Maximum Clamping Voltage		Withstanding Surge Current (8/20us)	Nominal Discharge Current (8/20us)	Rated Wattage	Energy (10/1000us)	Certification
	DC (V)	Tolerance	AC rms (V)	DC (V)	V@ ic (V)	ic (A)	1 Time (A)	In (KA)	(W)	(J)	  
JVZ 07U 180M	18	±20%	11	14	36	2.5	1500	0.5	0.02	1.2	☆ ☆ ☆
JVZ 07U 220L	22	±15%	14	18	43	2.5	1500	0.5	0.02	1.4	☆ ☆ ☆
JVZ 07U 270K	27	±10%	17	22	53	2.5	1500	0.5	0.02	1.7	☆ ☆ ☆
JVZ 07U 330K	33	±10%	20	26	65	2.5	1500	0.5	0.02	2.2	☆ ☆ ☆
JVZ 07U 390K	39	±10%	25	31	77	2.5	1500	0.5	0.02	2.4	☆ ☆ ☆
JVZ 07U 470K	47	±10%	30	38	93	2.5	1500	0.5	0.02	3.0	☆ ☆ ☆
JVZ 07U 560K	56	±10%	35	45	110	2.5	1500	0.5	0.02	3.5	☆ ☆ ☆
JVZ 07U 680K	68	±10%	40	56	135	2.5	1500	0.5	0.02	4.3	☆ ☆ ☆
JVZ 07U 181K	180	±10%	115	150	300	10	1800	1	0.25	19	☆ ☆ ☆
JVZ 07U 201K	200	±10%	130	170	340	10	1800	1	0.25	21	☆ ☆ ☆
JVZ 07U 221K	220	±10%	140	180	360	10	1800	1	0.25	23	☆ ☆ ☆
JVZ 07U 241K	240	±10%	150	200	395	10	1800	1	0.25	25	☆ ☆ ☆
JVZ 07U 271K	270	±10%	175	225	455	10	1800	1	0.25	28	☆ ☆ ☆
JVZ 07U 301K	300	±10%	195	250	505	10	1800	1	0.25	32	☆ ☆ ☆
JVZ 07U 331K	330	±10%	210	275	550	10	1800	1	0.25	34	☆ ☆ ☆
JVZ 07U 361K	360	±10%	230	300	595	10	1800	1	0.25	37	☆ ☆ ☆
JVZ 07U 391K	390	±10%	250	320	650	10	1800	1	0.25	40	☆ ☆ ☆
JVZ 07U 431K	430	±10%	275	350	710	10	1800	1	0.25	46	☆ ☆ ☆
JVZ 07U 471K	470	±10%	300	385	775	10	1800	1	0.25	49	☆ ☆ ☆
JVZ 07U 511K	510	±10%	320	418	842	10	1800	1	0.25	54	☆ ☆ ☆
JVZ 07U 561K	560	±10%	350	460	920	10	1800	1	0.25	55	☆ ☆ ☆
JVZ 07U 621K	620	±10%	385	505	1025	10	1800	1	0.25	59	☆ ☆ ☆
JVZ 07U 681K	680	±10%	420	560	1120	10	1800	1	0.25	62	☆ ☆ ☆
JVZ 07U 751K	750	±10%	460	615	1240	10	1800	1	0.25	66	☆ ☆ ☆
JVZ 07U 781K	780	±10%	485	640	1290	10	1800	1	0.25	68	☆ ☆ ☆
JVZ 07U 821K	820	±10%	510	670	1355	10	1800	1	0.25	71	☆ ☆ ☆


PULSE LIFETIME RATINGS- 7mm
7U180M~7U680K

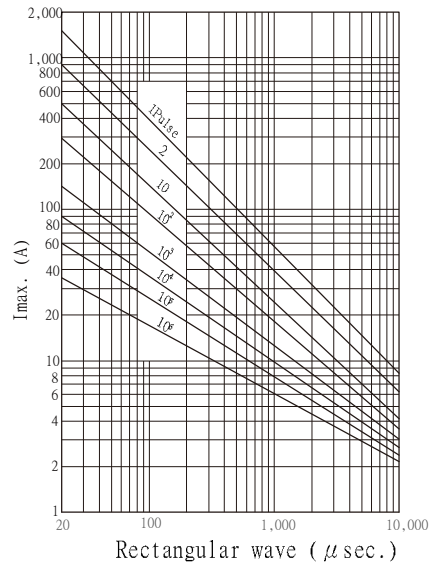


V-I CHARACTERISTIC CURVE -7mm
7U180M~7U680K

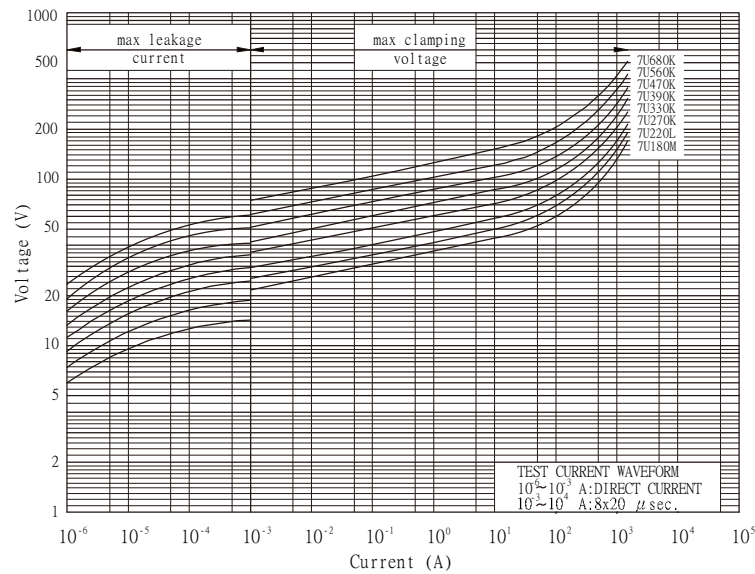

PULSE LIFETIME RATINGS- 7mm
7U181K~7U821K

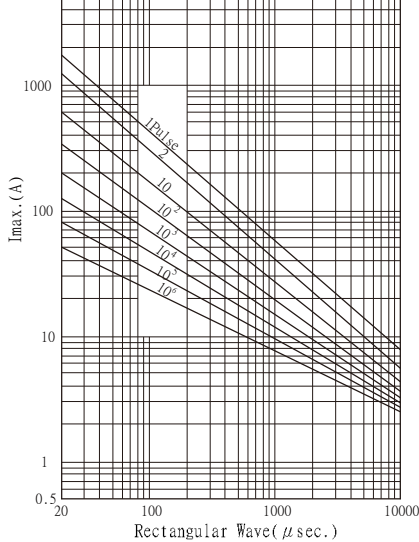

V-I CHARACTERISTIC CURVE -7mm
7U181K~7U821K

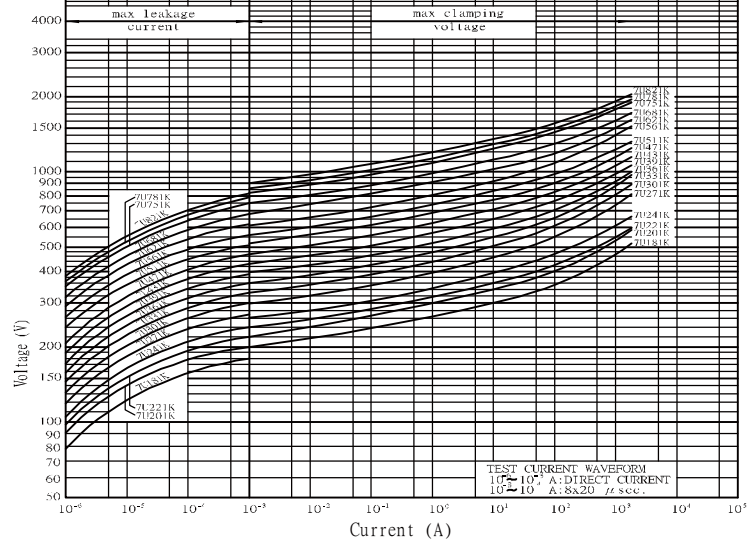

Ø 10mm

Rating and Characteristics

Part No.	Varistor Voltage at 1mA		Maximum Allowable Voltage		Maximum Clamping Voltage		Withstanding Surge Current (8/20us)	Nominal Discharge Current (8/20us)	Rated Wattage	Energy (10/1000us)	Certification
	DC (V)	Tolerance	AC rms (V)	DC (V)	V@ ic (V)	ic (A)	1 Time (A)	In (KA)	(W)	(J)	  
JVZ 10U 180M	18	±20%	11	14	36	5	3000	1	0.05	2.4	☆ ☆ ☆
JVZ 10U 220L	22	±15%	14	18	43	5	3000	1	0.05	2.7	☆ ☆ ☆
JVZ 10U 270K	27	±10%	17	22	53	5	3000	1	0.05	3.5	☆ ☆ ☆
JVZ 10U 330K	33	±10%	20	26	65	5	3000	1	0.05	4.4	☆ ☆ ☆
JVZ 10U 390K	39	±10%	25	31	77	5	3000	1	0.05	4.7	☆ ☆ ☆
JVZ 10U 470K	47	±10%	30	38	93	5	3000	1	0.05	6	☆ ☆ ☆
JVZ 10U 560K	56	±10%	35	45	110	5	3000	1	0.05	7	☆ ☆ ☆
JVZ 10U 680K	68	±10%	40	56	135	5	3000	1	0.05	8.5	☆ ☆ ☆
JVZ 10U 181K	180	±10%	115	150	300	25	4500	3	0.4	47	☆ ☆ ☆
JVZ 10U 201K	200	±10%	130	170	340	25	4500	3	0.4	52	☆ ☆ ☆
JVZ 10U 221K	220	±10%	140	180	360	25	4500	3	0.4	58	☆ ☆ ☆
JVZ 10U 241K	240	±10%	150	200	395	25	4500	3	0.4	64	☆ ☆ ☆
JVZ 10U 271K	270	±10%	175	225	455	25	4500	3	0.4	67	☆ ☆ ☆
JVZ 10U 301K	300	±10%	195	250	505	25	4500	3	0.4	70	☆ ☆ ☆
JVZ 10U 331K	330	±10%	210	275	550	25	4500	3	0.4	72	☆ ☆ ☆
JVZ 10U 361K	360	±10%	230	300	595	25	4500	3	0.4	76	☆ ☆ ☆
JVZ 10U 391K	390	±10%	250	320	650	25	4500	3	0.4	82	☆ ☆ ☆
JVZ 10U 431K	430	±10%	275	350	710	25	4500	3	0.4	93	☆ ☆ ☆
JVZ 10U 471K	470	±10%	300	385	775	25	4500	3	0.4	99	☆ ☆ ☆
JVZ 10U 511K	510	±10%	320	418	842	25	4500	3	0.4	107	☆ ☆ ☆
JVZ 10U 561K	560	±10%	350	460	920	25	4500	3	0.4	113	☆ ☆ ☆
JVZ 10U 621K	620	±10%	385	505	1025	25	4500	3	0.4	125	☆ ☆ ☆
JVZ 10U 681K	680	±10%	420	560	1120	25	4500	3	0.4	128	☆ ☆ ☆
JVZ 10U 751K	750	±10%	460	615	1240	25	4500	3	0.4	134	☆ ☆ ☆
JVZ 10U 781K	780	±10%	485	640	1290	25	4500	3	0.4	139	☆ ☆ ☆
JVZ 10U 821K	820	±10%	510	670	1355	25	4500	3	0.4	146	☆ ☆ ☆
JVZ 10U 911K	910	±10%	550	745	1500	25	4500	3	0.4	152	☆ ☆ ☆
JVZ 10U 102K	1000	±10%	625	825	1650	25	4500	3	0.4	170	☆ ☆ ☆
JVZ 10U 112K	1100	±10%	680	895	1815	25	4500	3	0.4	180	☆ ☆ ☆




Ø 14mm


Rating and Characteristics

Part No.	Varistor Voltage at 1mA		Maximum Allowable Voltage		Maximum Clamping Voltage		Withstanding Surge Current (8/20us)	Nominal Discharge Current (8/20us)	Rated Wattage	Energy (10/1000us)	Certification
	DC (V)	Tolerance	AC rms (V)	DC (V)	V@ ic (V)	ic (A)	1 Time (A)	In (KA)	(W)	(J)	  
JVZ 14U 180M	18	±20%	11	14	36	10	5000	2	0.1	4.7	☆ ☆ ☆
JVZ 14U 220L	22	±15%	14	18	43	10	5000	2	0.1	5.4	☆ ☆ ☆
JVZ 14U 270K	27	±10%	17	22	53	10	5000	2	0.1	6.9	☆ ☆ ☆
JVZ 14U 330K	33	±10%	20	26	65	10	5000	2	0.1	8.8	☆ ☆ ☆
JVZ 14U 390K	39	±10%	25	31	77	10	5000	2	0.1	9.4	☆ ☆ ☆
JVZ 14U 470K	47	±10%	30	38	93	10	5000	2	0.1	12	☆ ☆ ☆
JVZ 14U 560K	56	±10%	35	45	110	10	5000	2	0.1	14	☆ ☆ ☆
JVZ 14U 680K	68	±10%	40	56	135	10	5000	2	0.1	17	☆ ☆ ☆
JVZ 14U 181K	180	±10%	115	150	300	50	8000	3	0.6	60	☆ ★ ☆
JVZ 14U 201K	200	±10%	130	170	340	50	8000	3	0.6	82	☆ ★ ☆
JVZ 14U 221K	220	±10%	140	180	360	50	8000	3	0.6	90	☆ ★ ☆
JVZ 14U 241K	240	±10%	150	200	395	50	8000	3	0.6	98	☆ ★ ☆
JVZ 14U 271K	270	±10%	175	225	455	50	8000	3	0.6	116	☆ ★ ☆
JVZ 14U 301K	300	±10%	195	250	505	50	8000	3	0.6	128	☆ ★ ☆
JVZ 14U 331K	330	±10%	210	275	550	50	8000	3	0.6	140	☆ ★ ☆
JVZ 14U 361K	360	±10%	230	300	595	50	8000	3	0.6	158	☆ ★ ☆
JVZ 14U 391K	390	±10%	250	320	650	50	8000	3	0.6	170	☆ ★ ☆
JVZ 14U 431K	430	±10%	275	350	710	50	8000	3	0.6	185	☆ ★ ☆
JVZ 14U 471K	470	±10%	300	385	775	50	8000	3	0.6	205	☆ ★ ☆
JVZ 14U 511K	510	±10%	320	418	842	50	8000	3	0.6	220	☆ ★ ☆
JVZ 14U 561K	560	±10%	350	460	920	50	8000	3	0.6	240	☆ ★ ☆
JVZ 14U 621K	620	±10%	385	505	1025	50	8000	3	0.6	250	☆ ★ ☆
JVZ 14U 681K	680	±10%	420	560	1120	50	8000	3	0.6	260	☆ ★ ☆
JVZ 14U 751K	750	±10%	460	615	1240	50	8000	3	0.6	270	☆ ★ ☆
JVZ 14U 781K	780	±10%	485	640	1290	50	8000	3	0.6	274	☆ ★ ☆
JVZ 14U 821K	820	±10%	510	670	1355	50	8000	3	0.6	280	☆ ★ ☆
JVZ 14U 911K	910	±10%	550	745	1500	50	8000	3	0.6	295	☆ ★ ☆
JVZ 14U 102K	1000	±10%	625	825	1650	50	8000	3	0.6	335	☆ ★ ☆
JVZ 14U 112K	1100	±10%	680	895	1815	50	8000	3	0.6	360	☆ ★ ☆


PULSE LIFETIME RATINGS- 14mm
14U180M~14U680K

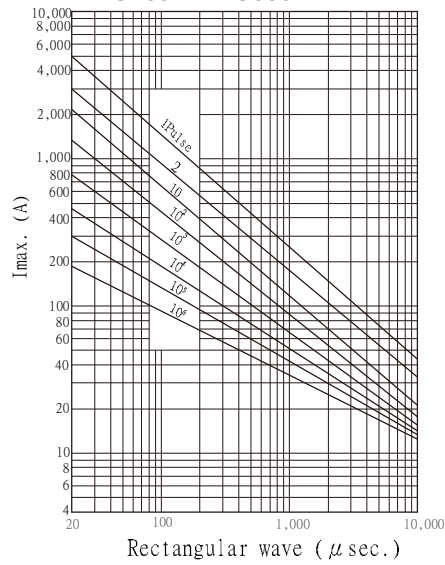


V-I CHARACTERISTIC CURVE -14mm
14U180M~14U680K

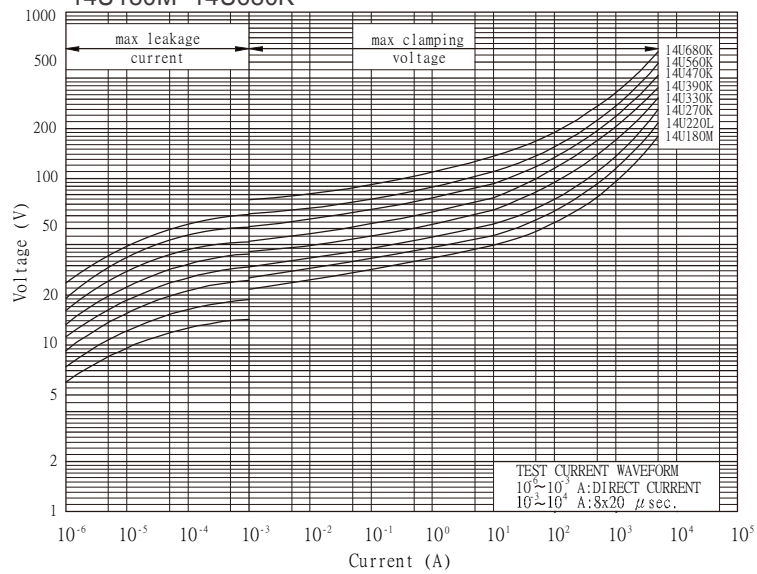

PULSE LIFETIME RATINGS- 14mm
14U181K~14U112K

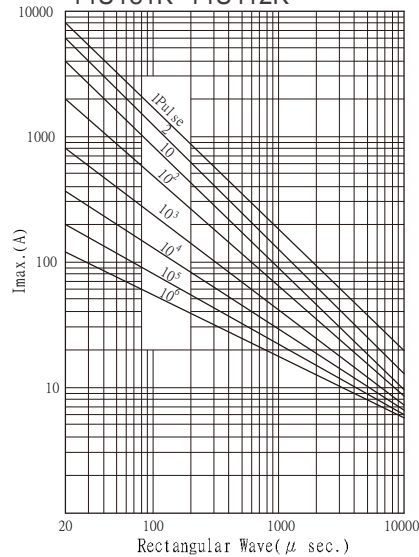

V-I CHARACTERISTIC CURVE -14mm
14U181K~14U112K

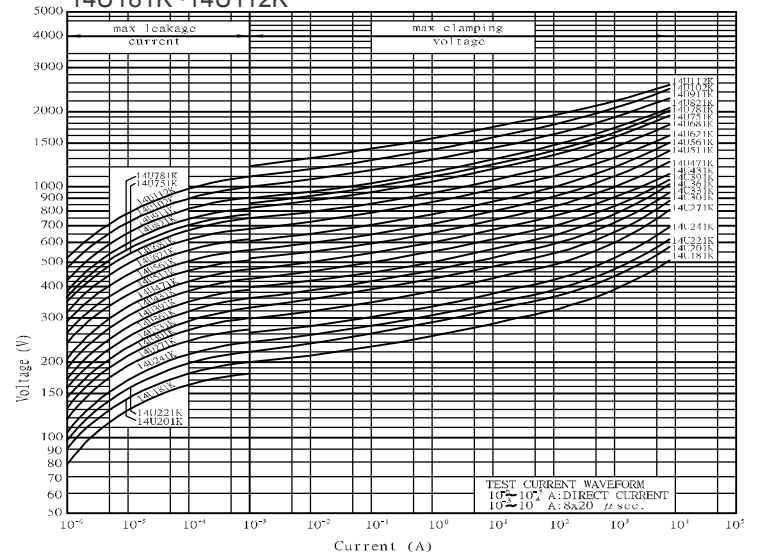




Ø 20mm


Rating and Characteristics

Part No.	Varistor Voltage at 1mA		Maximum Allowable Voltage		Maximum Clamping Voltage		Withstanding Surge Current (8/20us)	Nominal Discharge Current (8/20us)	Rated Wattage	Energy (10/1000us)	Certification
	DC (V)	Tolerance	AC rms (V)	DC (V)	V@ ic (V)	ic (A)	1 Time (A)	In (KA)	(W)	(J)	  
JVZ 20U 180M	18	±20%	11	14	36	20	9000	3	0.2	7	☆ ☆ ☆
JVZ 20U 220L	22	±15%	14	18	43	20	9000	3	0.2	8	☆ ☆ ☆
JVZ 20U 270K	27	±10%	17	22	53	20	9000	3	0.2	10	☆ ☆ ☆
JVZ 20U 330K	33	±10%	20	26	65	20	9000	3	0.2	12	☆ ☆ ☆
JVZ 20U 390K	39	±10%	25	31	77	20	9000	3	0.2	14	☆ ☆ ☆
JVZ 20U 470K	47	±10%	30	38	93	20	9000	3	0.2	17	☆ ☆ ☆
JVZ 20U 560K	56	±10%	35	45	110	20	9000	3	0.2	20	☆ ☆ ☆
JVZ 20U 680K	68	±10%	40	56	135	20	9000	3	0.2	24	☆ ☆ ☆
JVZ 20U 181K	180	±10%	115	150	300	100	13000	5	1	152	☆ ★ ☆
JVZ 20U 201K	200	±10%	130	170	340	100	13000	5	1	175	☆ ★ ☆
JVZ 20U 221K	220	±10%	140	180	360	100	13000	5	1	185	☆ ★ ☆
JVZ 20U 241K	240	±10%	150	200	395	100	13000	5	1	198	☆ ★ ☆
JVZ 20U 271K	270	±10%	175	225	455	100	13000	5	1	220	☆ ★ ☆
JVZ 20U 301K	300	±10%	195	250	505	100	13000	5	1	245	☆ ★ ☆
JVZ 20U 331K	330	±10%	210	275	550	100	13000	5	1	268	☆ ★ ☆
JVZ 20U 361K	360	±10%	230	300	595	100	13000	5	1	315	☆ ★ ☆
JVZ 20U 391K	390	±10%	250	320	650	100	13000	5	1	350	☆ ★ ☆
JVZ 20U 431K	430	±10%	275	350	710	100	13000	5	1	380	☆ ★ ☆
JVZ 20U 471K	470	±10%	300	385	775	100	13000	5	1	405	☆ ★ ☆
JVZ 20U 511K	510	±10%	320	418	842	100	13000	5	1	445	☆ ★ ☆
JVZ 20U 561K	560	±10%	350	460	920	100	13000	5	1	475	☆ ★ ☆
JVZ 20U 621K	620	±10%	385	505	1025	100	13000	5	1	490	☆ ★ ☆
JVZ 20U 681K	680	±10%	420	560	1120	100	13000	5	1	500	☆ ★ ☆
JVZ 20U 751K	750	±10%	460	615	1240	100	13000	5	1	525	☆ ★ ☆
JVZ 20U 781K	780	±10%	485	640	1290	100	13000	5	1	530	☆ ★ ☆
JVZ 20U 821K	820	±10%	510	670	1355	100	13000	5	1	545	☆ ★ ☆
JVZ 20U 911K	910	±10%	550	745	1500	100	13000	5	1	595	☆ ★ ☆
JVZ 20U 102K	1000	±10%	625	825	1650	100	13000	5	1	650	☆ ★ ☆
JVZ 20U 112K	1100	±10%	680	895	1815	100	13000	5	1	720	☆ ★ ☆


PULSE LIFETIME RATINGS- 20mm
20U180M~20U680K

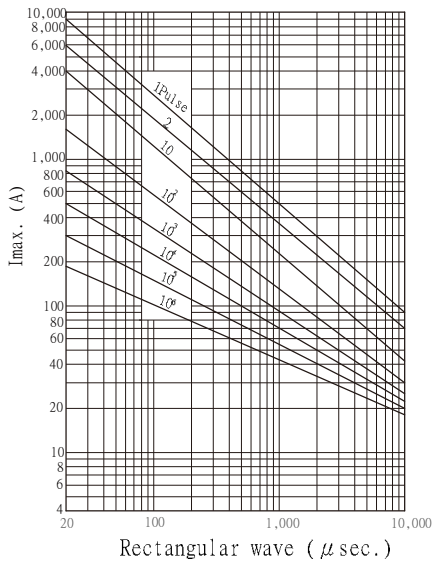


V-I CHARACTERISTIC CURVE -20mm
20U180M~20U680K

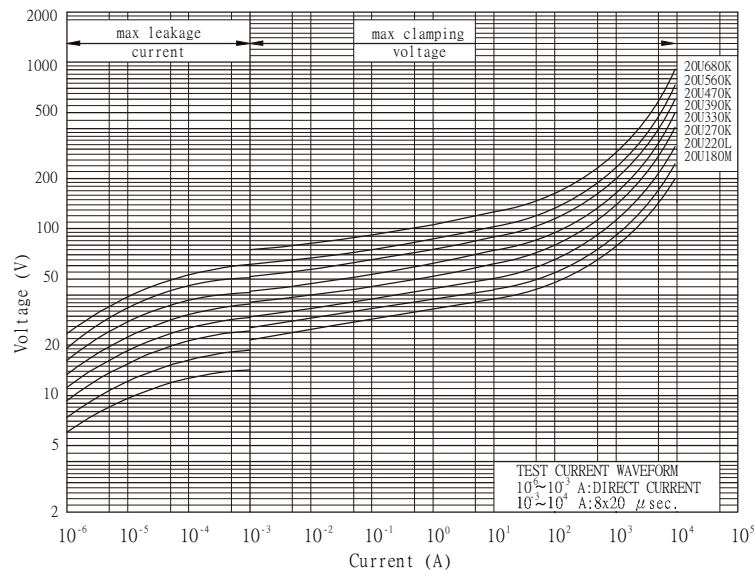

PULSE LIFETIME RATINGS- 20mm
20U181K~20U112K

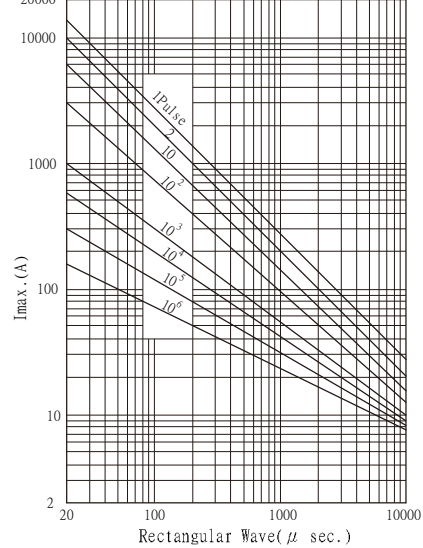


V-I CHARACTERISTIC CURVE - 20mm
20U181K~20U112K

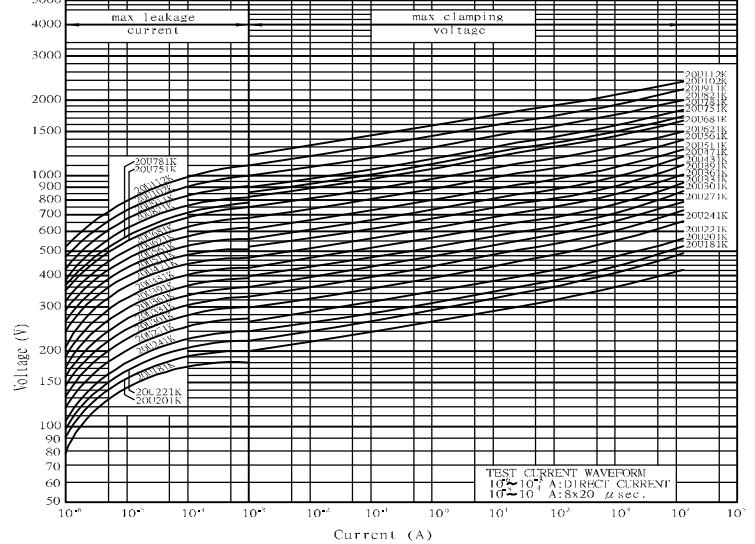

■ Reliability-JVZ

Test description	Standard	Test condition	Test requirement						
Tensile Strength of Terminals	IEC60068-2-21	After gradually applying the load specified below and keeping the unit fixed for 10±1 seconds. <table><tr><th>Terminal diameter (mm)</th><th>Force (Kg)</th></tr><tr><td>0.5<d≤0.8</td><td>1.0</td></tr><tr><td>0.8<d≤1.25</td><td>2.0</td></tr></table>	Terminal diameter (mm)	Force (Kg)	0.5<d≤0.8	1.0	0.8<d≤1.25	2.0	No visible damage
Terminal diameter (mm)	Force (Kg)								
0.5<d≤0.8	1.0								
0.8<d≤1.25	2.0								
Bending Strength of Terminals	IEC60068-2-21	Hold specimen and apply the force specified below to each lead. Bend the specimen to 90°,then return to the original position. Repeat the procedure in the opposite direction. <table><tr><th>Terminal diameter (mm)</th><th>Force (Kg)</th></tr><tr><td>0.5<d≤0.8</td><td>0.5</td></tr><tr><td>0.8<d≤1.25</td><td>1.0</td></tr></table>	Terminal diameter (mm)	Force (Kg)	0.5<d≤0.8	0.5	0.8<d≤1.25	1.0	No visible damage
Terminal diameter (mm)	Force (Kg)								
0.5<d≤0.8	0.5								
0.8<d≤1.25	1.0								
Vibration	IEC60068-2-6	Frequency range : 10Hz~55Hz Amplitude : 0.75mm or 98 m/s2 Direction : 3 mutually perpendicular directions,2hrs each.	No visible damage △Vb%≤±5%						
Solderability	IEC60068-2-20	Bath temperature : 245±3°C Immersion time : 3±0.3 sec	At least 95% of terminal electrode is covered by new solder						
Resistance to soldering heat	IEC60068-2-20	Bath temperature : 260±3°C Immersion time : 10±1 sec (5N series 5±0.5s)	No visible damage △Vb(1mA)≤±5%						
Voltage Proof	IEC61051-1	The specified voltage is applied between both terminals of the component connected together for 1 minute . <table><tr><td>2500Vrms(AC)</td><td>Test Voltage(AC)</td></tr></table>	2500Vrms(AC)	Test Voltage(AC)	No visible damage				
2500Vrms(AC)	Test Voltage(AC)								
Rapid change of temperature	IEC60068-2-14	Temperature cycle shall be repeated 5 cycles 1.-40±3°C keeping 30±3min 2.Room temperature keeping 5±3min 3.125±2°C keeping 30±3min 4.Room temperature keeping 5±3min	No visible damage △Vb%≤±5%						
Damp Heat, Steady State	IEC60068-2-78	Temperature 40±2°C R.H.90~95% at 10%Vdc 1344±24 hours <table><tr><td>Temperature 40±2°C R.H.90~95% for 1344±24 hours</td></tr></table>	Temperature 40±2°C R.H.90~95% for 1344±24 hours	No visible damage △Vb%≤±10% No visible damage △Vb%≤±5%					
Temperature 40±2°C R.H.90~95% for 1344±24 hours									
High temperature load	MIL-STD-202 Method 108	After being continuously applied the max allowable voltage at 105±5°C for 1000±24 hours	No visible damage △Vb%≤±10%						
High temperature storage	IEC60068-2-2	125±3°C for 1000±24 hours	No visible damage △Vb%≤±5%						
Low temperature storage	IEC60068-2-1	-40±2°C for 1000±24 hours	No visible damage △Vb%≤±5%						
Varistor Voltage Temp.Coefficient	Specification Standard	Measure V1mA at -40°C 、25°C 、105°C	-0.05≤TC≤0.05(%/°C)						
8/20μs Surge Life	IEC61051-1	8/20μs waveform,10 surge current,unipolar,interval 30 secs, amplitude corresponding to max. surge current derating curves for 20μs.	No visible damage △Vb%≤±10%						
10/1000μs Surge Life	IEC61051-1	10/1000μs waveform,10 surge current,unipolar,interval 2 mins, amplitude corresponding to max. surge current derating curves for 1000μs.	No visible damage △Vb%≤±10%						

■ Dimensions

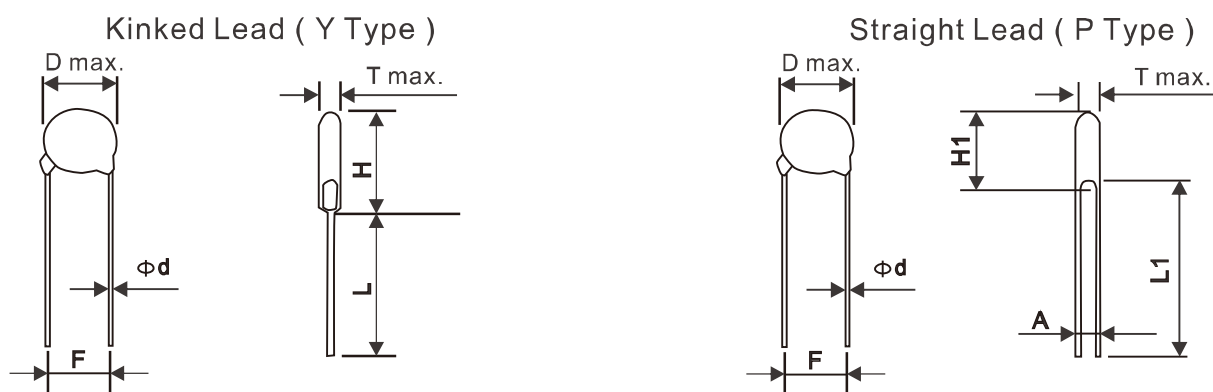

Dimension Table

unit : mm

Diameter	5mm	7mm	10mm	14mm	20mm	25mm
D max.	7.5	9.0	12.5	16.5	23	29
d ± 0.05	0.6	0.6	0.8	0.8	1.0	1.0
F ± 1.0	5.0	5.0	7.5	7.5	10.0	10.0
H max.	11.0	12.5	17/*19	22/*23	28/*29	36
L1 min.	25.0	25.0	25.0	25.0	25.0	25.0
L min.	24.0	24.0	24.0	24.0	24.0	20.0

*Just for 182K


Table of T max., A & H1 max.

unit : mm


Diameter	5mm			7mm			10mm			14mm			20mm			25mm		
Type No.	T max.	A ± 0.8	H1 max.	T max.	A ± 0.8	H1 max.	T max.	A ± 0.8	H1 max.	T max.	A ± 0.8	H1 max.	T max.	A ± 0.8	H1 max.	T max.	A ± 0.8	H1 max.
180M	3.9	0.8	10.5	3.9	0.8	12.0	4.3	0.8	15.0	4.3	0.9	19.5	/	/	/	/	/	/
220M/L	4.1	0.9	10.5	4.1	0.9	12.0	4.5	0.9	15.0	4.5	1.0	19.5	4.9	1.0	26.5	/	/	/
270M/K	4.3	0.9	10.5	4.3	0.9	12.0	4.7	0.9	15.0	4.7	1.0	19.5	5.1	1.1	26.5	/	/	/
330M/K	4.5	1.0	10.5	4.5	1.0	12.0	4.9	1.0	15.0	4.9	1.2	19.5	5.3	1.2	26.5	/	/	/
390L/K	4.5	1.2	10.5	4.5	1.2	12.0	5.1	1.2	15.0	5.1	1.4	19.5	5.4	1.4	26.5	/	/	/
470L/K	4.8	1.2	10.5	4.8	1.2	12.0	5.3	1.2	15.0	5.4	1.4	19.5	5.6	1.4	26.5	/	/	/
560L/K	4.8	1.4	10.5	4.8	1.4	12.0	5.5	1.4	15.0	5.6	1.6	19.5	5.6	1.6	26.5	/	/	/
680L/K	5.1	1.7	10.5	5.1	1.7	12.0	5.7	1.6	15.0	5.6	1.9	19.5	5.9	1.9	26.5	/	/	/
820K	3.8	0.8	10.5	3.8	0.8	12.0	4.3	0.8	15.0	4.3	1.0	19.5	4.7	1.1	26.5	/	/	/
101K	3.9	0.8	10.5	3.9	0.8	12.0	4.4	0.8	15.0	4.5	1.0	19.5	4.9	1.2	26.5	/	/	/
121K	4.1	0.9	10.5	4.1	0.9	12.0	4.5	0.9	15.0	4.6	1.1	19.5	5.1	1.3	26.5	/	/	/
151K	4.5	1.2	10.5	4.5	1.2	12.0	4.9	1.2	15.0	5.0	1.4	19.5	5.4	1.6	26.5	/	/	/
181K	3.9	1.0	10.5	3.9	1.0	12.0	4.3	1.0	15.0	4.3	1.2	19.5	5.0	1.4	26.5	/	/	/
201K	4.0	1.0	10.5	4.0	1.0	12.0	4.4	1.0	15.0	4.4	1.2	19.5	5.1	1.4	26.5	5.4	2.5	35
221K	4.0	1.1	10.5	4.0	1.1	12.0	4.4	1.1	15.0	4.4	1.3	19.5	5.2	1.5	26.5	5.6	2.6	35
241K	4.2	1.1	10.5	4.2	1.3	12.0	4.6	1.3	15.0	4.6	1.5	19.5	5.3	1.7	26.5	5.7	2.8	35
271K	4.4	1.3	10.5	4.4	1.4	12.0	4.8	1.4	15.0	4.8	1.5	19.5	5.5	1.9	26.5	6.0	3.0	35
301K	4.4	1.3	10.5	4.4	1.5	12.0	4.8	1.6	15.0	4.8	1.7	19.5	5.7	2.1	26.5	6.3	3.2	35
331K	4.5	1.3	10.5	4.5	1.5	12.0	4.9	1.6	15.0	4.9	1.7	19.5	5.8	2.1	26.5	6.6	3.4	35
361K	4.7	1.8	10.5	4.6	1.9	12.0	5.0	1.9	15.0	5.0	2.1	19.5	6.0	2.3	26.5	6.8	3.6	35
391K	4.8	2.0	11.0	4.8	2.0	12.5	5.2	2.2	15.0	5.2	2.2	19.5	6.2	2.4	26.5	7.1	3.9	35
431K	5.1	2.1	11.0	5.1	2.0	12.5	5.5	2.5	15.0	5.5	2.5	19.5	6.6	2.7	26.5	7.2	3.3	35
471K	5.2	2.2	11.0	5.2	2.3	12.5	5.6	2.6	15.0	5.6	2.7	19.5	6.8	2.9	27.0	7.4	3.5	35
511K	5.6	2.5	11.5	5.6	2.5	12.5	5.8	3.1	15.0	5.8	3.1	20.0	7.0	3.3	27.0	7.6	3.8	35
561K	5.7	2.8	11.5	5.7	2.8	12.5	6.1	3.4	15.0	6.1	3.4	20.0	7.3	3.6	27.0	7.9	4.0	35
621K	6.0	3.1	11.5	6.0	3.1	12.5	6.4	4.0	15.0	6.4	3.8	20.0	7.6	4.1	27.0	8.2	4.4	35
681K	6.3	3.4	11.5	6.3	3.4	12.5	6.8	4.4	15.0	6.8	4.1	20.0	8.0	4.4	27.0	8.3	4.7	35
751K	6.7	3.7	11.5	6.8	3.7	12.5	7.2	4.4	15.0	7.2	4.3	20.0	8.4	4.5	27.0	8.7	5.0	35
781K	/	/	/	7.0	3.9	12.5	7.3	4.6	15.0	7.3	4.6	20.0	8.6	4.8	27.0	8.9	5.2	35
821K	/	/	/	7.2	4.1	12.5	7.6	4.6	15.0	7.6	4.6	20.0	8.8	4.8	27.0	9.1	5.4	35
911K	/	/	/	/	/	/	8.2	5.4	16.0	8.2	5.4	20.5	9.3	5.7	27.0	9.6	5.9	35
102K	/	/	/	/	/	/	8.5	5.4	16.0	8.6	5.6	20.5	9.9	5.8	27.0	/	/	/
112K	/	/	/	/	/	/	9.1	5.7	16.0	9.1	6.1	20.5	10.3	6.3	27.0	/	/	/
122K	/	/	/	/	/	/	9.9	6.3	17.0	10.0	6.7	21.0	11.3	6.9	27.5	/	/	/
142K	/	/	/	/	/	/	10.7	7.4	17.5	10.9	7.8	21.5	12.8	8.0	28.0	/	/	/
162K	/	/	/	/	/	/	11.5	8.6	17.5	11.8	9.0	21.5	13.0	9.2	28.5	/	/	/
182K	/	/	/	/	/	/	12.6	9.8	17.5	12.8	10.2	21.5	13.5	10.4	29.0	/	/	/

■ Tape and Reel Dimensions

1/2" pitch

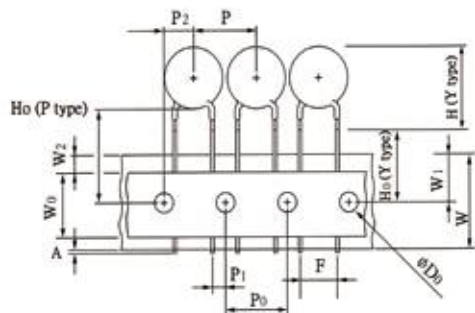

1.0" pitch

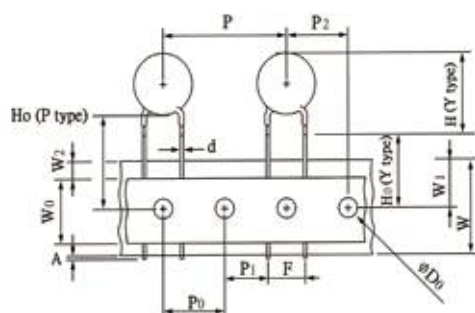


Symbols	Item	5 / 7 mm	10 / 14 mm	20 mm
A	Cut out length	1.1 mm max.	1.1 mm max.	
H (Y type)	Height of Top	See H max. table		
H0(Y type)	Height to seating plane	16.0 ± 0.5 mm (*± 1.0 mm)	16.0 ± 0.5 mm (*± 1.0 mm)	
H0(P type)	Height of component from hole center	16.0 ~ 21.0 mm	16.0 ~ 21.0 mm	
△h	Front to back deviation	0 ± 2.0 mm	0 ± 2.0 mm	
W	Carrier tape width	18 $\begin{smallmatrix} +1.0 \\ -0.5 \end{smallmatrix}$ mm	18 $\begin{smallmatrix} +1.0 \\ -0.5 \end{smallmatrix}$ mm	
W0	Hold down tape width	10.0 mm	12.0 mm	
W1	Sprocket hole position	9.0 $\begin{smallmatrix} +0.75 \\ -0.5 \end{smallmatrix}$ mm	9.0 $\begin{smallmatrix} +0.75 \\ -0.5 \end{smallmatrix}$ mm	
W2	Adhesive tape position	3.0 mm max.	3.0 mm max.	
F	Component lead spacing	5.0 ± 1.0 mm	7.5 ± 1.0 mm	10.0 ± 1.0 mm
P	Pitch of component	12.7 ± 1.0 mm	25.4 ± 1.0 mm	
P0	Sprocket hole pitch	12.7 ± 0.3 mm	12.7 ± 0.3 mm	
P1	Lead length from hole center to lead	3.85 ± 0.7 mm	8.95 ± 0.7 mm	7.7 ± 0.7 mm
P2	Length from hole center to disk center	6.35 ± 1.3 mm	12.7 ± 1.3 mm	
D0	Sprocket hole diameter	4.0 ± 0.2 mm	4.0 ± 0.2 mm	
d	Lead wire diameter	0.6 ± 0.05 mm	0.8 ± 0.05 mm	1.0 ± 0.05 mm
T	Disk thickness	See T max. table	See T max. table	
t1	Total thickness tape	0.7 ± 0.05 mm	0.7 ± 0.05 mm	
t2	Total thickness	1.6 mm max.	1.8 mm max.	

■ Marking & packaging

MARKING



PACKAGING

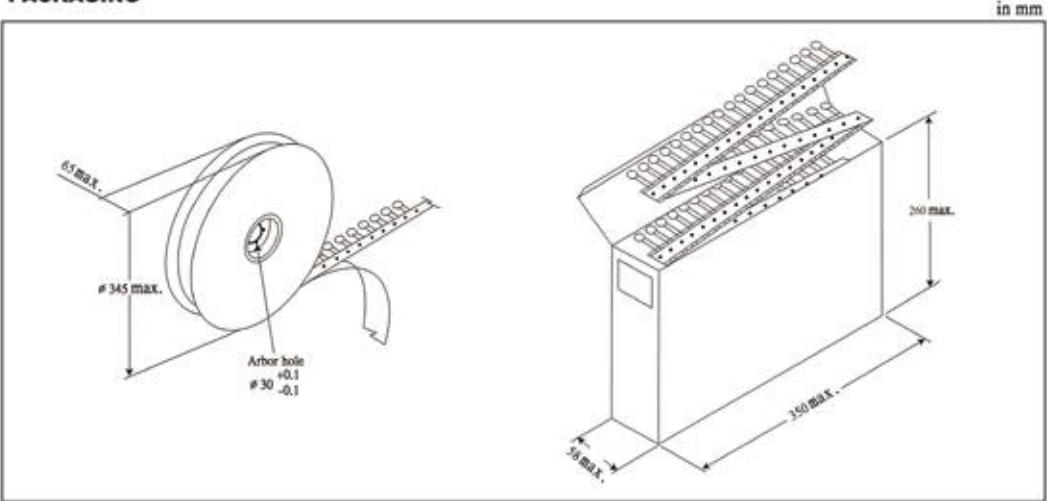

Series Part No.	5mm			7mm			10mm			14mm			20mm			25mm
	Bulk (Box)	Reel	Ammo	Bulk (Box)	Reel	Ammo	Bulk (Box)	Reel	Ammo	Bulk (Box)	Reel	Ammo	Bulk (Box)	Reel	Ammo	Bulk (Box)
180M ~ 470K	5000	1500	1500	5000	1500	1500	2500	1000	500	1500	750	500	750	500	500	-
560K ~ 680K	5000	1500	1000	5000	1500	1000	2500	1000	500	1500	750	500	750	500	500	-
820K ~ 391K	5000	1500	1500	5000	1500	1500	2500	1000	500	1500	750	500	750	500	500	750
431K ~ 471K	5000	1500	1000	5000	1000	1000	2000	750	500	1500	750	500	750	500	500	750
511K ~ 821K	4000	1000	1000	4000	1000	1000	1500	500	500	750	500	500	450	500	500	450
911K ~ 122K	-	-	-	-	-	-	1500	500	350	750	500	350	450	-	-	450
142K ~ 182K	-	-	-	-	-	-	750	-	-	450	-	-	300	-	-	-

Packaging	Bulk (Box)	Reel	Reel (14 mm, 20 mm)	Ammo (5 mm, 7 mm)	Ammo (10 mm, 14 mm)	Ammo (20 mm)
Box size (mm)	290 × 155 × 110	350 × 350 × 105	346 × 346 × 72	335 × 245 × 43	347 × 246 × 50	348 × 255 × 60
Carton size (mm)	328 × 310 × 250	370 × 370 × 590	370 × 370 × 468	515 × 354 × 258	515 × 364 × 246	535 × 365 × 275
One carton with	4 Boxes	5 Boxes (10 reels)	6 Boxes (6 reels)	10 Boxes	8 Boxes	8 Boxes

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Varistors](#) category:

Click to view products by [Joyin](#) manufacturer:

Other Similar products are found below :

[R71ZOV151HC](#) [B72214S251K151](#) [25FN511K](#) [ERZ-C14DK361U](#) [207869-1](#) [B72540E 350K 62](#) [B72670M1140K72](#) [TVZ18EC271KBS](#)
[TVZ20EB911KBS](#) [TVZ25D201KBS](#) [VZ07D220KBS](#) [VZ40D241KQ-N](#) [VZ40D241K](#) [VZ25D511KBS-N](#) [VZ20E511KBSX](#) [VZ10D471KBS-](#)
[N](#) [20A9FN241K](#) [B72205S350K211](#) [B72650M151K93](#) [B72650M350K72](#) [TVZ25DN271KBS](#) [TVZ25D301KBS](#) [TVZ20EC911KBS](#)
[TVZ20EBN911KBS](#) [TVZ18EC471KBS](#) [B72220S350K101](#) [VZ20D391KBS-N](#) [VZ10D241KBS-N](#) [VZ07D390KBS-N](#) [B72540E170K62](#)
[TNR9G431KT31](#) [Z62000Z2310Z14](#) [Z62000Z2310Z18](#) [Z62000Z2310Z11](#) [Z62000Z2310Z16](#) [Z62000Z2310Z12](#) [Z62000Z2310Z13](#)
[Z62000Z2310Z17](#) [3225D561KJ](#) [FNR05K820TFTN1NN](#) [SR390K07DS20C5DEN](#) [102KD20-\(YWT\)8](#) [681KD10-C3.5Z2](#) [271KD05-C3Z2](#)
[561KD10-P7.5Z2C3.5Z2](#) [561KD14J-ZC3.5Z2HJ](#) [751KD20-P7.5](#) [511KD14J-\(KS\)](#) [621KD20-\(YWT\)6](#) [431KD10J-P7.5Z2D12H15E064](#)