

General Description

The TPS7A4001 device is a very high voltage-tolerant linear regulator that offers the benefits of a thermally-enhanced package (EMSOP8), and is able to withstand continuous DC or transient input voltages of up to 100V. The TPS7A4001 device is stable with output capacitance greater than 2.2 μ F and any input capacitance greater than 0.47 μ F (over temperature and tolerance). Therefore, implementations of this device require minimal board space because of its miniaturized packaging (EMSOP8) and a potentially small output capacitor. In addition, the TPS7A4001 device offers an enable pin (EN) compatible with standard CMOS logic to enable a low-current shutdown mode.

The TPS7A4001 device has an internal thermal shutdown and current limiting to protect the system during fault conditions. The EMSOP8 packages has an operating temperature range of $T_J = -40^{\circ}\text{C}$ to 125°C . In addition, the TPS7A4001 device is ideal for generating a low-voltage supply from intermediate voltage rails in telecom and industrial applications; not only can it supply a well-regulated voltage rail, but it can also withstand and maintain regulation during very high and fast voltage transients. These features translate to simpler and more cost-effective electrical surge-protection circuitry for a wide range of applications, including PoE, bias supply, and LED lighting.



Features

- VIN Range 7 to 100V
- Output Voltage Tolerances of $\pm 1.5\%$
- Output Current of 50 mA
- Low Quiescent Current 23 μ A
- Quiescent Current at Shutdown 8 μ A
- Dropout Voltage 2.8V at $I_{\text{OUT}} = 50$ mA
- Internal Thermal Overload Protection
- Internal Short-Circuit Current Limit
- Adjustable Output Voltage from 1.2 to 90V

Applications

- Microprocessors, Microcontrollers Powered by Industrial Busses With High Voltage Transients
- Industrial Automation
- Telecom Infrastructure
- Automotive
- Power over Ethernet(PoE)
- LED Lighting

Typical Application Circuit

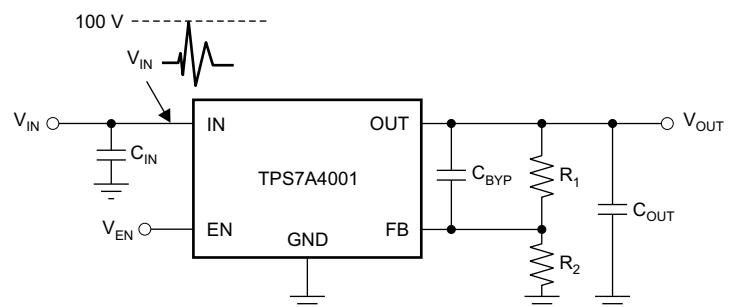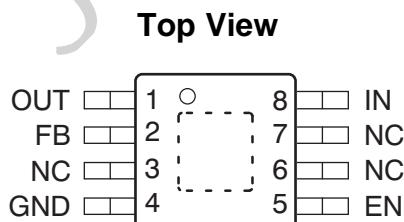


Ceramic Capacitor Stable

Pin Assignment

Pin Name	PSOP8 Pin No		Pin Function
OUT	1		Output Voltage Pin
FB	2		Feedback
NC	3,6,7		Non Connect
GND	4		Ground
EN	5		Enable
IN	8		Input Voltage pin.

Function Block Diagram

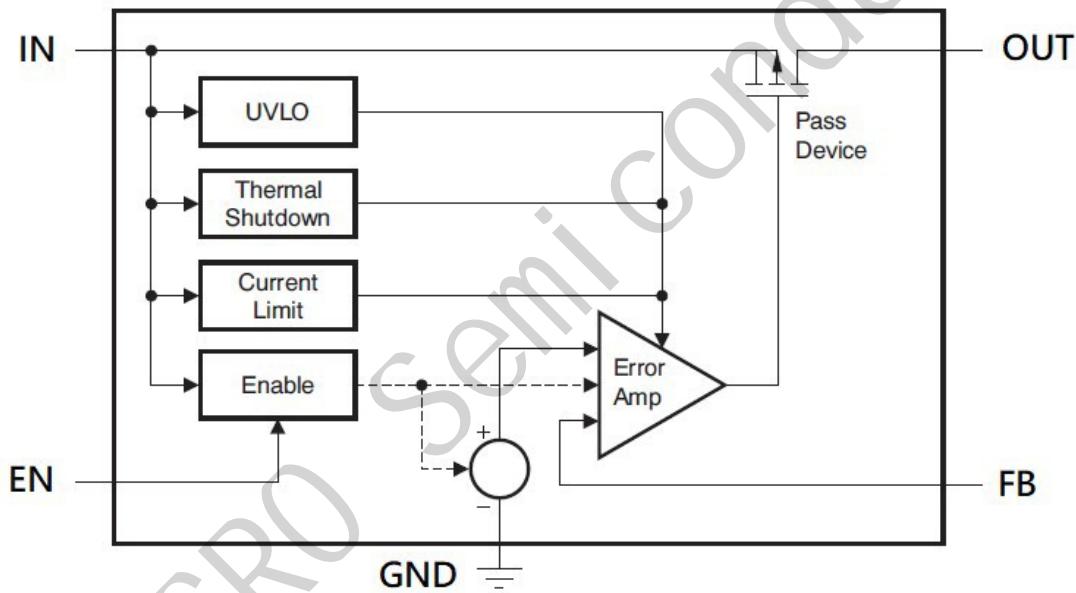

Absolute Maximum Ratings (Note1)

V _{IN}	-0.3V to 110V
V _{OUT}	-0.3V to 110V
FB	-0.3V to 5.5V
EN	-0.3V to 110V
Junction Temperature	125°C
Lead Temperature (Soldering, 10 sec.)	300°C
Storage Temperature	-65°C to 150°C

Recommended Operating Conditions

Input Voltage, V _{IN}	7V to 100V
Output Voltage, V _{OUT}	1.2V to 90V
Enable Voltage, V _{EN}	0V to 100V
Output Current, I _{OUT}	0mA to 50mA
Junction Temperature	-40°C to 125°C

Electrical Characteristics

V_{IN}=V_{OUT} + 3V or V_{IN}=7V (whichever is greater), I_{OUT}=100uA, C_{IN}=1uF, C_{OUT}=4.7uF, T_J=25°C, unless otherwise specified

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Input Voltage	V _{IN}		7		100	V
Internal Reference	V _{REF}		0.788	0.8	0.812	V
Line Regulation	△V _{LINE}	V _{IN} =7V to 100V,		3	20	mV
Load Regulation	△V _{LOAD}	100uA < I _{OUT} < 50mA		20	50	mV
Dropout Voltage	V _{DROP}	I _{OUT} =20mA		1000		mV
		I _{OUT} =50mA		2800		mV
Quiescent Current	I _Q	I _{OUT} = 0mA		23	40	uA
Shutdown Current	I _{SD}	V _{EN} = 0V		8	15	uA
Current Limit	I _{CL}	V _{OUT} = 90% V _{OUT(NOM)}	55	120	200	mA
Enable High Low Level	V _{ENHI}		1.0		V _{IN}	V
	V _{ENLO}		0		0.4	V
Enable Pin Current	I _{EN}	7V < V _{IN} < 100V, V _{IN} =V _{EN}		0.02	1	uA
Feedback Pin Current	I _{FB}			0.01	0.11	uA
Thermal Shutdown	T _{SD}	Shutdown, temperature increasing		160		°C
		Reset, temperature decreasing		140		°C

Typical Characteristics

$V_{IN}=12V$, $V_{OUT}=5V$ $I_{OUT}=1mA$, $C_{IN}=0.47\mu F$, $C_{OUT}=2.2\mu F$, $T_J=25^{\circ}C$, unless otherwise specified

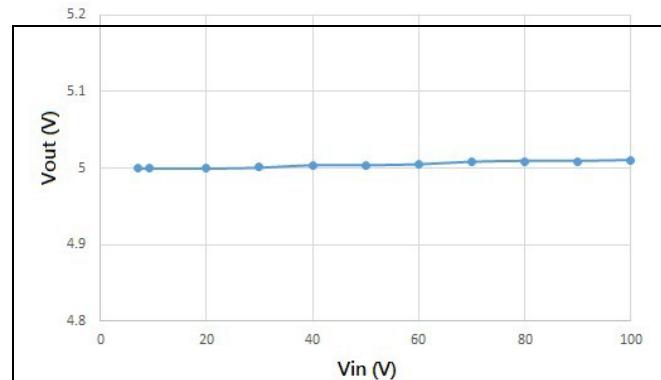


Fig1 Vout vs Vin

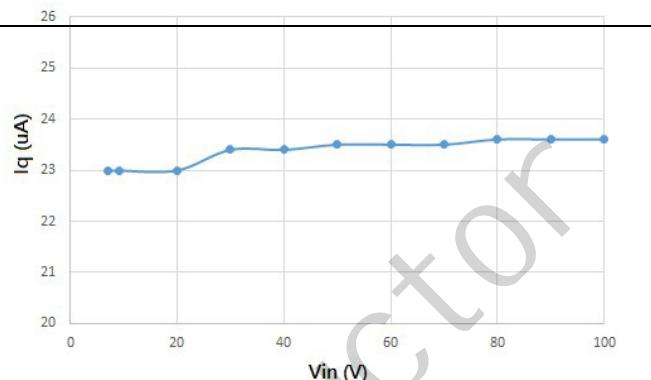


Fig2 Iq vs Vin

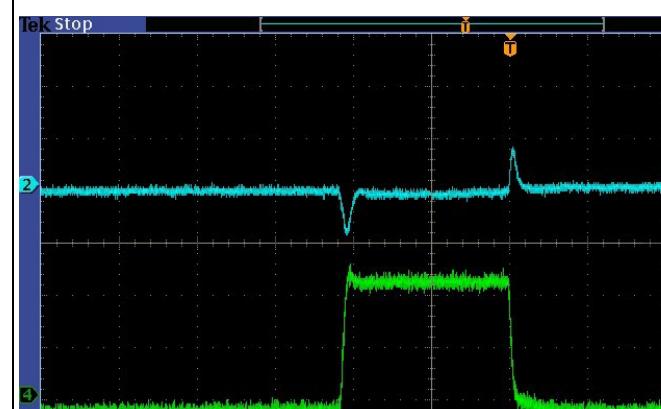


Fig3 Load transient 0 to 50mA

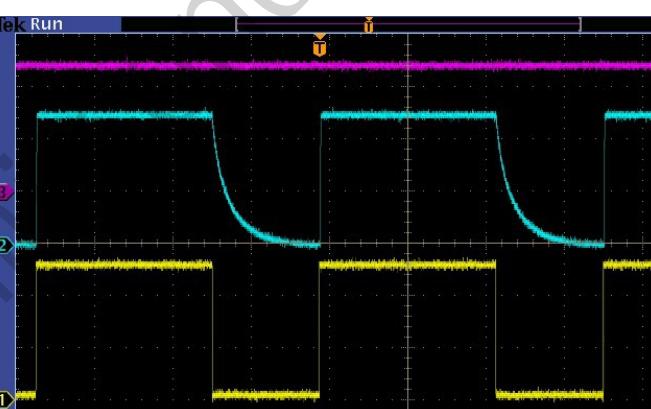


Fig4 Enable ON/OFF

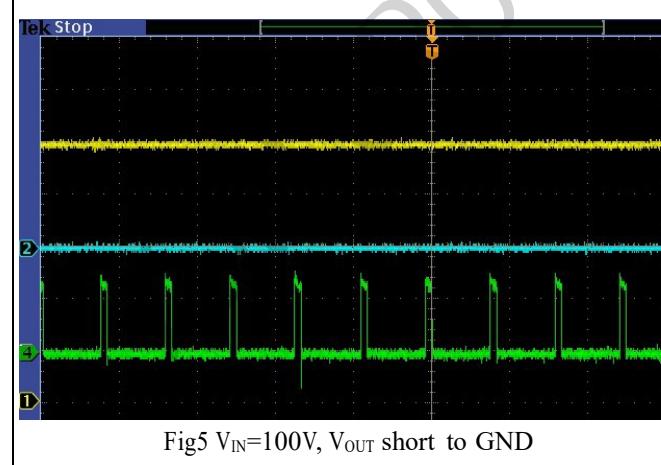


Fig5 $V_{IN}=100V$, V_{OUT} short to GND





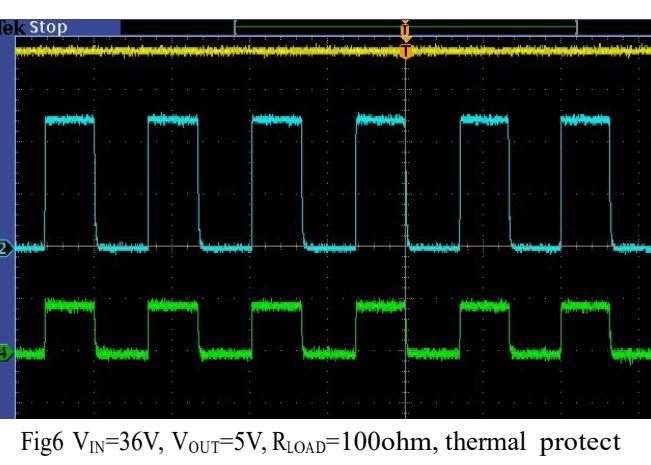


Fig6 $V_{IN}=36V$, $V_{OUT}=5V$, $R_{LOAD}=100\text{ohm}$, thermal protect

EMSOP8

尺寸标注	最小(mm)	最大(mm)	尺寸标注	最小(mm)	最大(mm)
A	2.90	3.10	C3		0.152
A1	0.28	0.35	C4	0.15	0.23
A2	0.65TYP		H	0.00	0.09
A3	0.375TYP		θ		12° TYP4
B	2.90	3.10	θ1		12° TYP4
B1	4.70	5.10	θ2		14° TYP
B2	0.45	0.75	θ3		0° ~ 6°
C	0.75	0.95	R		0.15TYP
C1	--	1.10	R1		0.15TYP
C2		0.328TYP			

* 注EMSOP8产品共用此图所有数据，Die pad exposure大小是根据引线框架设计。

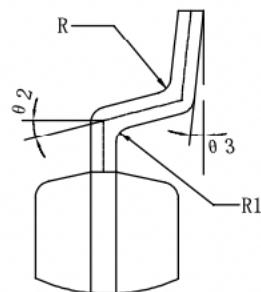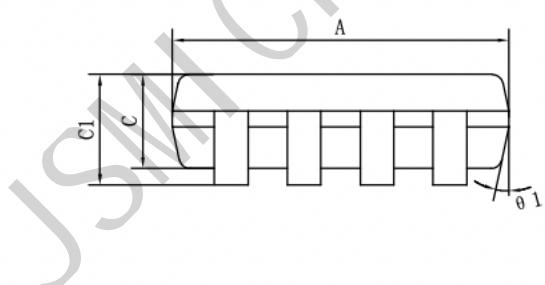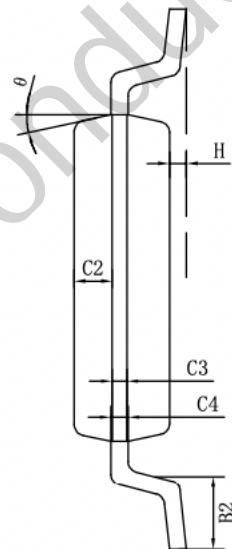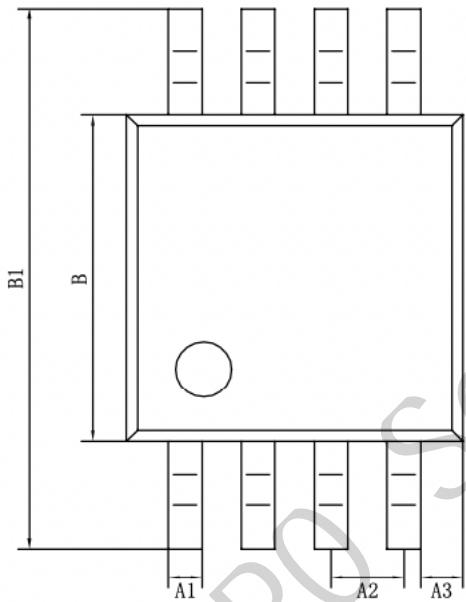

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Voltage Regulators](#) category:

Click to view products by [JSMSEMI](#) manufacturer:

Other Similar products are found below :

[LV56831P-E](#) [LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [PQ3DZ53U](#) [LV56801P-E](#) [TLE42794G](#) [L78L05CZ/1SX](#) [L78LR05DL-MA-E](#) [636416C](#) [714954EB](#) [ZMR500QFTA](#) [LV5680P-E](#) [L78M15CV-DG](#) [L79M05T-E](#) [TLS202A1MBVHTSA1](#) [L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [MP2018GZD-33-P](#) [MP2018GZD-5-P](#) [LV5680NPVC-XH](#) [LT1054CN8](#) [MP2018GZD-5-Z](#) [MP2018GZD-33-Z](#) [AT55EL50ESE](#) [APL5934DKAI-TRG](#) [78L05U](#) [78L05](#) [CL9193A15L5M](#) [CL9036A30F4M](#) [CL9036A18F4M](#) [CL9036A25F4M](#) [CL9036A28F4M](#) [CL9036A33F4M](#) [CL9906A18F4N](#) [CL9906A30F4N](#) [CL9908A30F4M](#) [CL9908A33F4M](#) [CL9908A18F4M](#) [CL9908A28F4M](#) [TL431ACM/TR](#) [TL431AIM/TR](#) [LM78L05ACM/TR](#) [HT7812ARMZ](#) [HT7805ARMZ](#) [HT317LRHZ](#) [HXY6206I-3.0](#) [HXY6206I-3.3](#) [XC6206P252MR](#) [XC6206P282MR](#)