


R82, Film, Metallized Polyester Stacked, Automotive Grade, 0.068 uF, 5%, 400 VDC, 85°C, Lead Spacing = 5mm

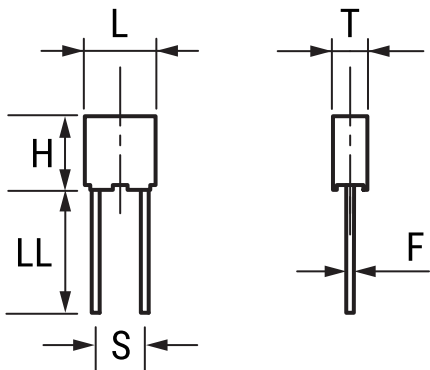

Dimensions

L	7.2mm +0.3mm
H	11mm +0.1mm
T	6mm +0.1mm
S	5mm +/-0.4mm
LL	17mm +1/-2mm
F	0.5mm +/-0.05mm

Packaging Specifications

Packaging:	Bulk, Bag
Packaging Quantity:	1000

General Information

Series:	R82
Dielectric:	Metallized Polyester Stacked
Style:	Radial
Features:	Automotive Grade, DC Multipurpose Applications
RoHS:	Yes
Lead:	Wire Leads
Qualifications:	AEC-Q200
AEC-Q200:	Yes
Miscellaneous:	Above 85C DC And AC Voltage Derating Is 1.25%/C

Specifications

Capacitance:	0.068 uF
Capacitance Tolerance:	5%
Voltage AC:	160 VAC
Voltage DC:	400 VDC
Temperature Range:	-55/+105°C
Rated Temperature:	85°C
Dissipation Factor:	0.80% 1kHz, 1.20% 10kHz, 2.50% 100kHz
Insulation Resistance:	30 GOhms
Max dV/dt:	200 V/us
Inductance:	7 nH

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Film Capacitors](#) category:

Click to view products by [Kemet](#) manufacturer:

Other Similar products are found below :

[703-6G](#) [82DC4100CK60J](#) [82EC1100DQ50K](#) [A551EK471M450F](#) [A561ED221M450A](#) [QXL2B333KTPT](#) [EEC2G505HQA406](#) [217-0716-001](#)
[225K100ST3827T](#) [274ACF4400WA0J](#) [274ACF5150WA0J](#) [SCD105K122A3-22](#) [SCD205K122A3-24](#) [QXL2E473KTPT](#) [46KR368050M1M](#)
[46KR447050M2K](#) [ECQ-W4223KZ](#) [EEC2G805HQA415](#) [82DC4100AA60K](#) [82EC2150DQ50K](#) [JFX-3.3U/250](#) [JFX-2.2U/250](#) [JFX-1U/250](#)
[JFX-10U/250](#) [JFX-6.8U/250](#) [JFX-4.7U/250](#) [PHE841ED6150MR17T0](#) [82IC2150DQ50J](#) [82EC2220DQ50J](#) [MPEB-100N15/630](#) [MPEB-](#)
[1U22/400](#) [NRM474K400F](#) [82DC3220AA60J](#) [WYP-104M](#) [WYP-103M](#) [WXPC-475K](#) [WXPC-334K](#) [WXP-103K](#) [WXPC-154K](#) [WXPC-684K](#)
[WYP-223M](#) [JFX-8.2U/250](#) [254M06QD150](#) [B32656S8105K566](#) [EEC2G105HQA401](#) [QXL2B223KTPT](#) [QXL2E103KTPT](#) [FKS3-](#)
[.01/100/20P7](#) [F601JF102J400A](#) [MKS02-4700/250/10](#)