


T495, Tantalum, MnO2 Tantalum, 2.2 uF, 10%, 16 VDC, SMD, MnO2, Molded, Low ESR, 1.8 Ohms, 3216, Height Max = 1.8mm

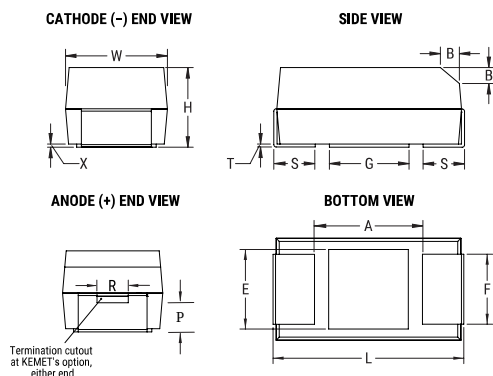

General Information

Series:	T495
Dielectric:	MnO2 Tantalum
Style:	SMD Chip
Description:	SMD, MnO2, Molded, Low ESR
Features:	Low ESR
RoHS:	Yes
Termination:	Tin
AEC-Q200:	No
Shelf Life:	156 Weeks
MSL:	1

Dimensions

Footprint	3216
L	3.2mm +/-0.2mm
W	1.6mm +/-0.2mm
H	1.6mm +/-0.2mm
T	0.13mm REF
S	0.8mm +0.2/-0.3mm
F	1.2mm +/-0.1mm
A	1.2mm MIN
B	0.4mm +/-0.15mm
E	1.3mm REF
G	1.1mm REF
P	0.4mm REF
R	0.4mm REF
X	0.1mm +/-0.1mm

Specifications

Capacitance:	2.2 uF
Capacitance Tolerance:	10%
Voltage DC:	16 VDC (85C), 10.72 VDC (125C)
Temperature Range:	-55/+125°C
Rated Temperature:	85°C
Dissipation Factor:	6% 120Hz 20C
Failure Rate:	N/A
Resistance:	1800 mOhms (100kHz)
Ripple Current:	204 mA (rms, 100kHz 25C), 183.6 mA (rms, 85C), 81.6 mA (rms, 125C)
Leakage Current:	0.5 uA (5min 20°C)

Packaging Specifications

Weight:	58.6 mg
Packaging:	T&R, 178mm
Packaging Quantity:	2000

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Tantalum Capacitors - Solid SMD category:](#)

Click to view products by [Kemet manufacturer:](#)

Other Similar products are found below :

[TCP0J685M8R](#) [CWR09JC225JBB](#) [NTC-T107K16TRDF](#) [NTC-T226K20TRCF](#) [NTC-T475K16TRBF](#) [NTC-T106K16TRAF](#) [NTC-T106K20TRBF](#) [595D686X9010B2T](#) [TAJD475K050KNJ](#) [F931V225MBE](#) [178MU0042](#) [178MU0023](#) [178MU0018](#) [178MU0043](#) [178MU0032](#) [PXTB006M107E035STU](#) [CA45A-P-6.3V-10UF-K](#) [CA45-B-16V-47uF-M](#) [CA45-A-35V-0.1UF-K](#) [CA45-B-16V-47uF-K](#) [CA45A-B-25V-4.7UF-K](#) [CA45-A-16V-22uF-M](#) [CA45A-B-16V-22UF-K](#) [178MU0036](#) [178MU0026](#) [178MU0037](#) [178MU0035](#) [178MU0040](#) [178MU0028](#) [178MU0024](#) [CA45B-B-25V-4.7UF-K](#) [CA45A-B-10V-100UF-K](#) [CA45A-B-16V-33UF-K](#) [CA45-B-20V-22UF-M](#) [CA45B-B-50V-1UF-K](#) [CA45A-A-35V-0.47UF-K](#) [CA45B-A-16V-1UF-K](#) [CA45B-A-25V-2.2UF-K](#) [CA45-A-25V-2.2uF-K](#) [CA45A-A-35V-0.68UF-K](#) [CA45A-P-6.3V-22UF-K](#) [CA45A-B-16V-47UF-K](#) [CA45B-B-6.3V-100UF-K](#) [CA45A-A-16V-1UF-K](#) [CA45-B-10V-22uF-K](#) [CA45A-B-25V-3.3UF-K](#) [CA45-A-16V-1uF-M](#) [CA45B-B-25V-10UF-K](#) [CA45B-A-16V-2.2UF-K](#) [CA45A-B-10V-22UF-K](#)