


H47 纸标签规格书

一、物理特性


1.1 尺寸

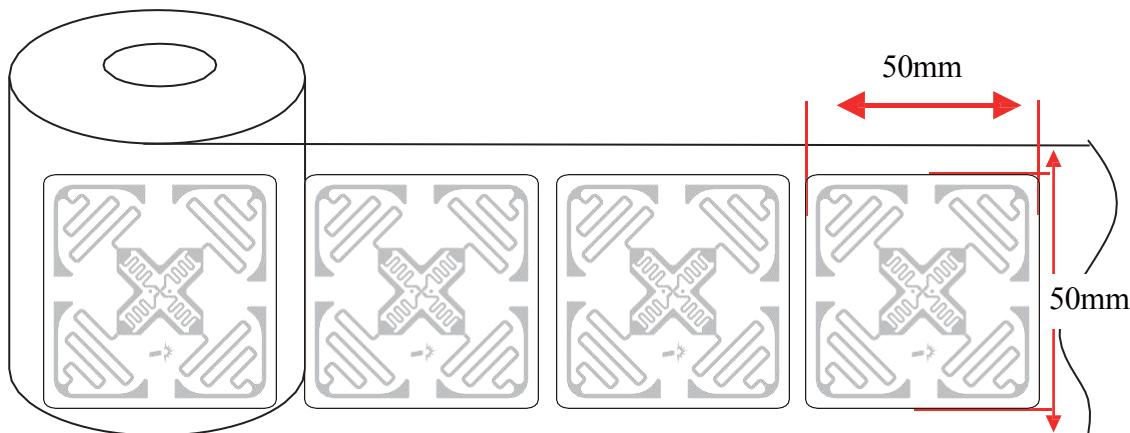

1.2 尺寸说明

No .	类别	说明	注明
1	标签尺寸	50*50mm , R2 圆角	
2	标签跳距	2.07mm	
3	底纸宽度	58MM	
4	面材	80 克铜版纸	格拉辛底
5	每卷数量	2000张	
6	包装方式	静电袋密封	

1.3 结构

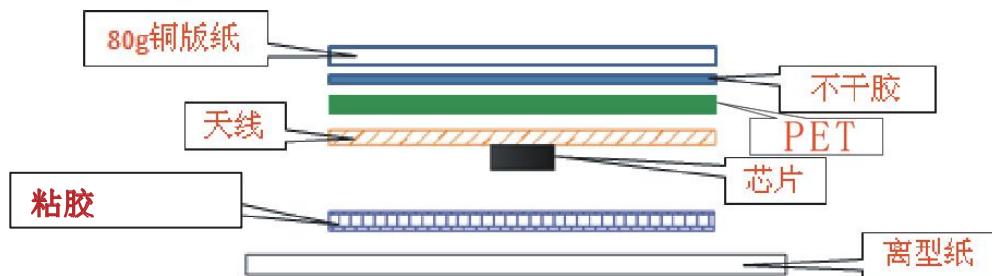

二、电气特性

项目	描述	备注
制造商/芯片	Impinj/Monza 4E	
基材材质	80g 铜版纸	
天线制程方式	铝蚀刻Al(9 μ m)+PET(50 μ m)	
符合标准	ISO/IEC 18000-6C EPC Class1 Gen2	
芯片存储区	EPC	128/496/128 Biets
	TID	48/48/48 Bits
	密码区	32Bits访问密码 32Bits灭活密码
	用户区	32/128/512 Bits
适用载波频率	860~960MHz	
工作模式	无源	
芯片使用寿命	写10万次，数据保存10年	
芯片防静电(ESD)性能	2000V	人体模型(HBM)

1、环境要求：

操作温度：[-40°C to +70°C] 20% to 90% RH Non-condensing; 适

用温度：[-25°C to +50°C] 20% to 90% RH Non-condensing;

成品保质期：使用防静电袋密封包装、在+23°C±5°C / 50%±10%RH 条件下2年。

2、包装

抽真空包装 5000±5pcs/卷，4卷/箱

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RFID Transponders](#) category:

Click to view products by [Kinghelm manufacturer:](#)

Other Similar products are found below :

[PCF7941ATSM2AB120](#), [NT2H0301F0DTL,125](#) [SL2S1512FTBX](#) [AT88SC0808CRF-MX1](#) [HT2DC20S20/F/RSP](#) [V680S-A40 50M](#)
[NT3H1201W0FTTJ](#) [PN7120A0EV/C10801Y](#) [TRPGP40ATGC](#) [TRPGR30ATGA](#) [M24LR04E-RMC6T2](#) [P5DF081HN/T1AR1070](#)
[SPS1M003B](#) [SPS1M003A](#) [SPS1M002B](#) [SPS1M002A](#) [V680S-HMD64-ETN](#) [V680S-A40 10M](#) [V680S-A41 10M](#) [V680-D1KP66T](#)
[PCF7946AT/1081/CM](#) [ATA5577M2330C-DBQ](#) [AS3930-BTST](#) [CLRD710,599](#) [PCF7938XA/CAAB3800](#) [ST25DV64K-JFR6D3](#) [V680S-](#)
[HMD66-ETN](#) [ST25DV04K-JFR6D3](#) [AT88RF04C-MVA1](#) [ST25DV16K-JFR6D3](#) [NVT4857UKAZ](#) [NT2H1611G0DA8J](#) [LXMSANAA19-181](#)
[PCF7936AA/3851/C/6](#) [KH-RFID-4216-BQ](#) [KH-RFID-7023-BQ](#) [KH-RFID-8046-BQ](#) [60208](#) [60170](#) [PN7150B0HN/C11006Y](#)
[PN7150B0HN/C11006E](#) [RF-HDT-DVBB-N2](#) [SRTAG2K-DMC6T/2](#) [TRPGR30ATGB](#) [PN5120A0HN1/C2,157](#) [RF37S114HTFJB](#)
[MF3MOD4101DA4/05,1](#) [MAX1473EUI+T](#) [NRF51822-QFAA-R](#) [28340](#)