KVR16LS11/8

8GB 2Rx8 1G x 64-Bit PC3L-12800
CL11 204-Pin SODIMM

DESCRIPTION

This document describes ValueRAM's 1G x 64-bit (8GB) DDR3L-1600 CL11 SDRAM (Synchronous DRAM), 2Rx8, low voltage, memory module, based on sixteen 512M x 8-bit FBGA components. The SPD is programmed to JEDEC standard latency DDR3-1600 timing of 11-11-11 at 1.35V or 1.5V. This 204-pin SODIMM uses gold contact fingers. The electrical and mechanical specifications are as follows:

FEATURES

- JEDEC standard 1.35V (1.28V ~ 1.45V) and 1.5V (1.425V ~ 1.575V) Power Supply

- VDDQ = 1.35V (1.28V ~ 1.45V) and 1.5V (1.425V ~ 1.575V)

- 800MHz fCK for 1600Mb/sec/pin

- 8 independent internal bank

- Programmable CAS Latency: 11, 10, 9, 8, 7, 6

- Programmable Additive Latency: 0, CL - 2, or CL - 1 clock

- 8-bit pre-fetch

- Burst Length: 8 (Interleave without any limit, sequential with starting address "000" only), 4 with tCCD = 4 which does not allow seamless read or write [either on the fly using A12 or MRS]

- Bi-directional Differential Data Strobe

- Internal(self) calibration : Internal self calibration through ZQ pin (RZQ : 240 ohm ± 1%)

- On Die Termination using ODT pin

- Average Refresh Period 7.8us at lower than TCASE 85°C, 3.9us at 85°C < TCASE ≤ 95°C

- Asynchronous Reset

- PCB: Height 1.18" (30mm), double sided component

SPECIFICATIONS

CL(IDD)	11 cycles
Row Cycle Time (tRCmin)	48.125ns (min.)
Refresh to Active/Refresh Command Time (tRFCmin)	260ns (min.)
Row Active Time (tRASmin)	35ns (min.)
Maximum Operating Power	(1.35V) = 2.721W*
UL Rating	94 V - 0
Operating Temperature	0° C to 85° C
Storage Temperature	-55° C to +100° C

*Power will vary depending on the SDRAM.

MODULE DIMENSIONS:

30.00

R 2.00 X 2

4.00
+/−0.10

20.00

1.80 DIA. NPTH X 2

6.00

FULL RAD.

4.00 +/−0.10

0.50 CHAMFER X 2 PLCS.

0.00

1.00
+/−0.10

(units = millimeters)

0.00
2.00

24.80

65.60
67.60
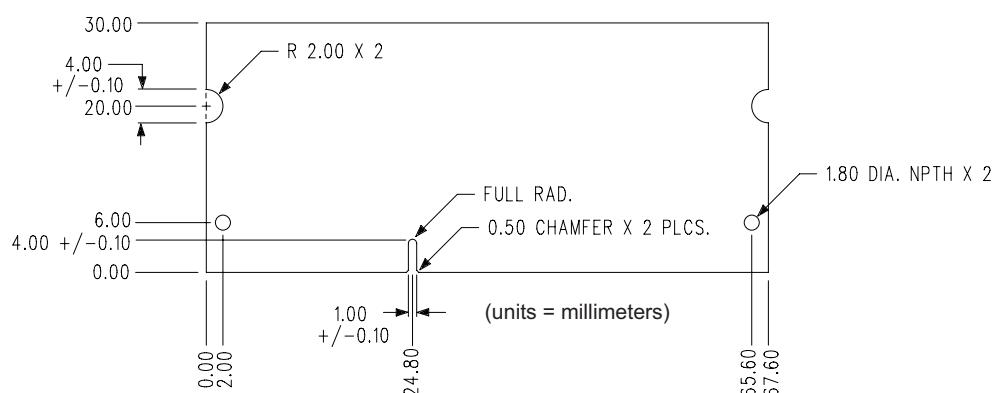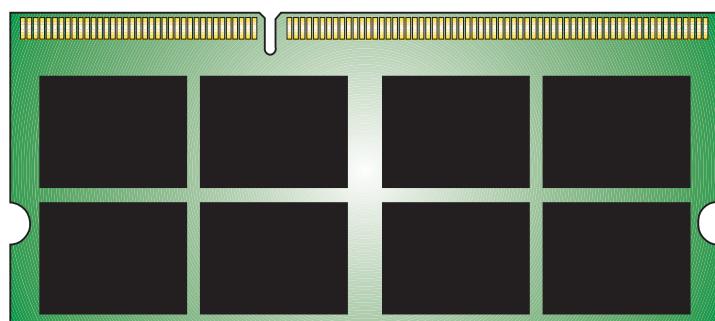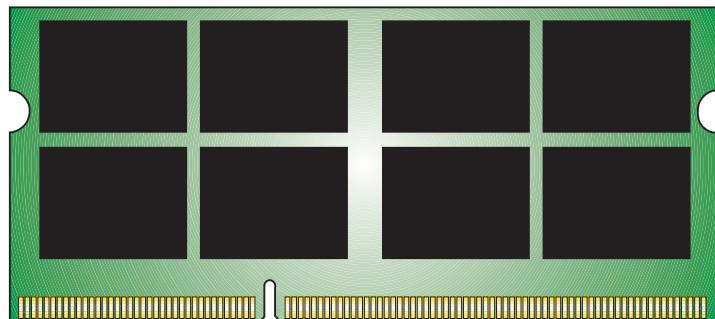
X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for kingston *manufacturer:*

Other Similar products are found below :

SDCA3/32GB SM2280S3G2/120G 04EPOP08-NL3DM627-B02U SD4/32GB SEDC400S37/960G EMMC16G-W525-X01U 08EPOP04-NL3DT227-A01U SEDC1000H/1600G 04EMCP04-NL2DM627-Z02U 08EMCP04-NL3DT227-A01U B1621PM1WDGTKR-U B5116ECMDXGGB-U EMMC04G-W100-E08U SDA10/128GB KVR13N9S8H/4 D5128EETBPGGBU-U SDA3/32GB D5128EC4BPGGBUI-U SKC400S37/1T KVR21R15D4/16 CF/256 SUV400S37/240G SKC400S37/512G EMMC04G-M627-A01 BOXSIZE 4 BOXSIZE 3