

Bit Socket



In order to get normal life of bit socket, always use within limited torque to bit.

4021

⊕ 1/2"

- Phillips head
- DIN ISO 8764-1



KT NO.	⊕ No.	Overall length mm		
402102	PH2	60	67	10 / 180
402103	PH3	60	77	10 / 180
402104	PH4	60	68	10 / 180

4022

⊖ 1/2"

- Slotted head
- DIN ISO 5264 / 3120



KT NO.	Tip width mm	Tip thickness mm	Overall length mm		
402208	8	1.2	60	68	10 / 180
402210	10	1.6	60	75	10 / 180
402212	12	2.0	60	89	10 / 180
402214	14	2.5	60	104	10 / 180
402216	16	2.5	60	104	10 / 180

4025

4035

40D5

⊙ 1/2"

- Hexagon head
- DIN 7422



KT NO.	mm / Inch	Overall length mm		
402503	H3	60	65	10 / 180
402504	H4	60	65	10 / 180
402505	H5	60	66	10 / 180
402506	H6	60	68	10 / 180
402507	H7	60	67	10 / 180
402508	H8	60	70	10 / 180
402509	H9	60	78	10 / 180
402510	H10	60	80	10 / 180
402511	H11	60	95	10 / 180
402512	H12	60	94	10 / 180
402514	H14	60	114	10 / 180
402517	H17	66	166	10 / 100
402519	H19	66	225	10 / 120
403504	H4	80	74	6 / 120
403505	H5	80	75	6 / 120
403506	H6	80	77	6 / 120
403507	H7	80	77	6 / 120
403508	H8	80	80	6 / 120
403509	H9	80	91	6 / 120
403510	H10	80	93	6 / 120
403511	H11	80	111	6 / 120
403512	H12	80	113	6 / 120
403514	H14	80	140	6 / 120
403517	H17	80	193	6 / 120
403519	H19	80	259	6 / 96
40D506	H6	140	101	6 / 120
40D508	H8	140	102	6 / 120
40D510	H10	140	131	6 / 120
402506S	3/16	60	66	10 / 180
402507S	7/32	60	68	10 / 180
402508S	1/4	60	69	10 / 180
402509S	9/32	60	71	10 / 180
402510S	5/16	60	76	10 / 180
402512S	3/8	60	79	10 / 180
402514S	7/16	60	92	10 / 180
402516S	1/2	60	110	10 / 180
402518S	9/16	66	156	12 / 120
402520S	5/8	66	162	12 / 120
402524S	3/4	66	226	10 / 120

40D0

⬡ 1/2"

- Hexagon with ball point head



KT NO.	mm	Overall length mm		
40D006	H6	140	101	6 / 120
40D008	H8	140	103	6 / 120
40D010	H10	140	132	6 / 120

4026


4036

⬢ 1/2"

4046

4066

- Spline head
- DIN 3120

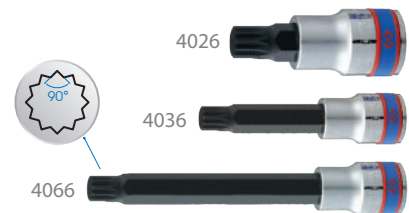

KT NO.	Size	Overall length mm		
402605	M5	60	69	10 / 180
402606	M6	60	67	10 / 180
402608	M8	60	70	10 / 180
402610	M10	60	78	10 / 180
402612	M12	60	91	10 / 180
402614	M14	60	108	10 / 180
402616	M16	60	144	10 / 120
402618	M18	60	195	10 / 120
403605	M5	80	75	6 / 120
403606	M6	80	76	6 / 120
403608	M8	80	76	6 / 120
403610	M10	80	91	6 / 120
403612	M12	80	110	6 / 120
403614	M14	80	135	6 / 120
404605	M5	100	83	6 / 120
404607	M7	100	84	6 / 120
404608	M8	100	85	6 / 120
404610	M10	100	105	6 / 120
404612	M12	100	128	6 / 120
404614	M14	100	161	6 / 120
406608	M8	140	102	6 / 120
406609	M9	140	131	6 / 120
406610	M10	140	130	6 / 120
406612	M12	140	168	6 / 120
406614	M14	140	212	6 / 120
406616	M16	140	301	6 / 72

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Screwdrivers, Nut Drivers & Socket Drivers](#) ***category:***

Click to view products by [KING TONY](#) ***manufacturer:***

Other Similar products are found below :

[1406504-2](#) [30246](#) [5739](#) [6962](#) [9977](#) [EMF](#) [75340](#) [SF-TX 15X80 VDE](#) [SF-TX 20X80 VDE](#) [998](#) [LN25MMN](#) [P8N](#) [THS9N](#) [HS10N](#) [FSD1N](#)
[SDR11N](#) [320-9508-023 MS](#) [27627](#) [40462](#) [73508](#) [720LC/21](#) [861RI/6](#) [861TQS/1](#) [861TQS/10](#) [SF-TXH 25X100](#) [SF-TX 25X100 VDE](#) [SF-TX](#)
[30X100 VDE](#) [SZS 1,2X8,0 VDE](#) [SF-M BH](#) [SZS 0,8X4,0 VDE](#) [SZK PH3 VDE](#) [TSD-M SAC-BIT ADAPTER](#) [13010003](#) [18120001](#)
[05078635001](#) [05042750001](#) [05028161001](#) [233513M](#) [012560008](#) [012560013](#) [012560047](#) [012560009](#) [PGT040](#) [19101012](#) [012560001](#)
[012560054](#) [012560051](#) [233013M](#) [012560063](#) [223055M](#)