

NRSC Series

SMD Shielded Tiny Power Inductor Size 5020




Features:

- Magnetic-resin shielded construction reduces buzz noise to ultra-low levels
- Metallization on ferrite core results in excellent shock resistance and damage-free durability
- Closed magnetic circuit design reduces leakage flux and Electro Magnetic Interference (EMI)
- 30% higher current rating than conventional inductors of equal size
- Takes up less PCB real estate and save more power
- Quantity: 2000 pcs


Application:

- LED Lighting
- Next-generation mobile devices with multifunction such as mobile TV and digital movie cameras
- Flat-screen TVs, blue-ray disc recorders, set top box
- Notebooks, desktop computers, servers, graphic cards cards
- Portable gaming devices, personal navigation systems, personal multimedia devices
- Automotive systems
- Telecomm base stations

Dimensions: [mm]

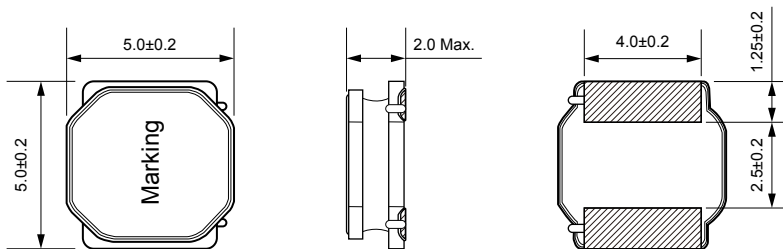

Land Pattern: [mm]



Electrical Properties:

Part No	Inductance (μH)	Tolerance	Saturation current (A)	Temperature Rise Current (A)	DCR ±20% (Ω)	S.R.F Min. (MHz)
NRSC5020-R47N	0.47	±30%	6.15	4.60	0.013	160
NRSC5020-R75N	0.75	±30%	5.50	4.00	0.017	117
NRSC5020-1R0N	1.0	±30%	4.10	3.80	0.020	114
NRSC5020-1R2N	1.2	±30%	4.50	3.55	0.022	83
NRSC5020-1R5N	1.5	±30%	4.10	3.20	0.026	68
NRSC5020-2R2N	2.2	±30%	3.20	2.90	0.032	57
NRSC5020-2R7N	2.7	±30%	2.90	2.70	0.038	52
NRSC5020-3R0N	3.0	±30%	2.55	2.70	0.038	49
NRSC5020-3R3N	3.3	±30%	2.55	2.50	0.043	46
NRSC5020-3R6N	3.6	±30%	2.80	2.50	0.043	43
NRSC5020-3R9N	3.9	±30%	2.30	2.50	0.043	40
NRSC5020-4R3M	4.3	±20%	2.50	2.20	0.057	37
NRSC5020-4R7M	4.7	±20%	2.50	2.20	0.057	37
NRSC5020-5R1M	5.1	±20%	2.25	2.05	0.064	32

Part No	Inductance (μH)	Tolerance	Saturation current (A)	Temperature Rise Current (A)	DCR ±20% (Ω)	S.R.F Min. (MHz)
NRSC5020-5R6M	5.6	±20%	2.30	2.05	0.064	32
NRSC5020-6R8M	6.8	±20%	2.05	1.80	0.083	30
NRSC5020-7R5M	7.5	±20%	1.85	1.75	0.090	26
NRSC5020-8R2M	8.2	±20%	1.85	1.65	0.098	26
NRSC5020-9R1M	9.1	±20%	1.70	1.55	0.110	24
NRSC5020-100M	10	±20%	1.70	1.55	0.110	24
NRSC5020-120M	12	±20%	1.50	1.40	0.140	22
NRSC5020-150M	15	±20%	1.35	1.25	0.165	20
NRSC5020-180M	18	±20%	1.25	1.15	0.200	16
NRSC5020-220M	22	±20%	1.15	1.10	0.226	14

Inductance tested at 100kHz, 1Vrms.


Operating temperature : -40℃ ~ +125℃

Temperature rise current: the actual value of DC current when the temperature rise is ΔT40℃


Saturation Current that will cause initial inductance to drop approximately 30%

Typical Electrical Characteristics:

Inductance VS. DC.Current Characteristics:

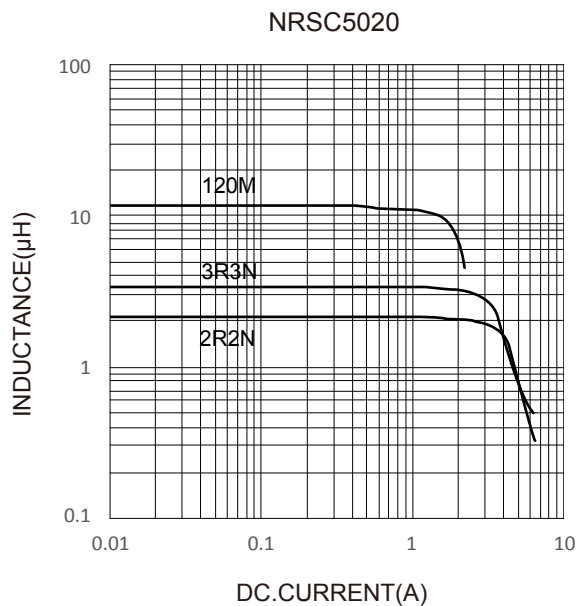

Temperture Rise VS. DC.Current Characteristics:

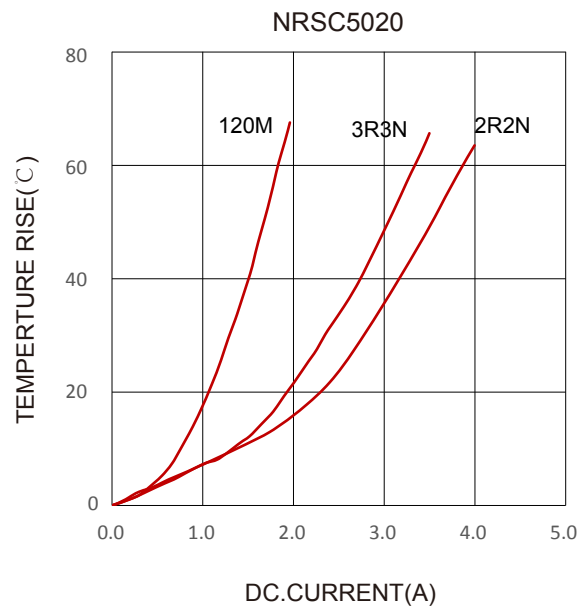

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [KOHER](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [CR54NP-470LC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#)
[MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#)
[1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#)
[RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-](#)
[223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#)
[1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#)