


K9051-C741 ATX

Industrial Server Class

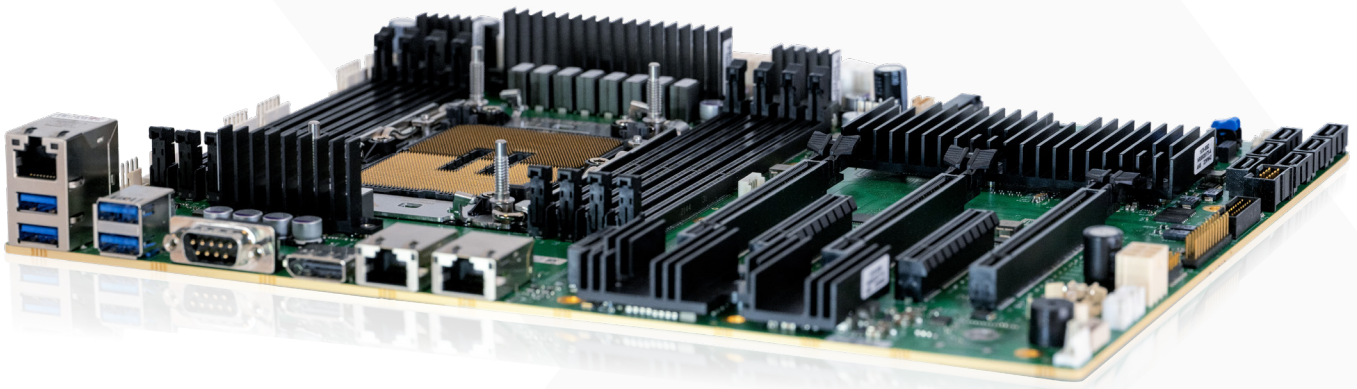


Intel® 4th/5th Generation Xeon® Scalable Processor(SP) with Intel® C741 chipset

- Up to 64 cores with maximum TDP 350W
- DDR5 memory up to 5600 MHz RDIMM, up to 768 GByte
- 5x PCIe Gen 5 expansion slots
- Dual LAN Intel® X710 10 GbE including teaming

The server-class K9051 ATX is paired with the Intel® C741 chipset and supports Intel® 4th/5th Gen Intel® Xeon® scalable processors with up to 64 cores. With memory density up to 768 GByte and 5 PCIe Gen 5 expansion slots, today's most demanding applications including AI, imaging, sequencing and industrial pro-

cessing are possible. Supports board management and monitoring via ASPEED A2600 using OpenBMC. The K9051 is designed for continuous 24/7 operation for 10 years in demanding environments.

- ▶ Intel® 4th/5th Generation Xeon® scalable processor
- ▶ Intel® C741 Chipset
- ▶ 8x DDR5 5600 MT/s RDIMM Independent Channels
- ▶ 3x PCIe Gen5 x16 slots and 2 x PCIe Gen5 x8 slots
- ▶ 2x 10GBASE-T RJ45 Ethernet ports
- ▶ 6x SATA 6G incl. RAID support
- ▶ 4x Type A connectors USB 3.2 Gen1 (5Gbps)
- ▶ DisplayPort connector via AST2600 video output
- ▶ Discrete Infineon TPM version 2.0

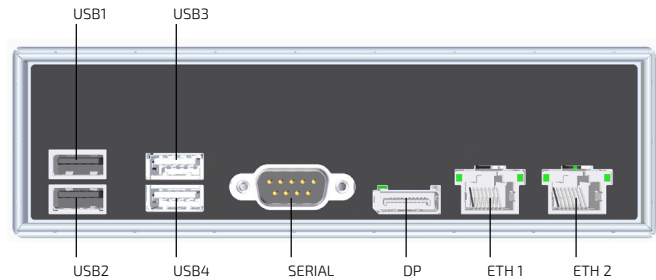

Technical Information

SYSTEM	PROCESSOR CHIPSET MEMORY	Intel® 4th/5th Gen Xeon® SP up to 64 cores Socket LGA4677 Up to 350W TDP Intel® C741 8x RDIMM Sockets DDR5-5600, max. 768 GBytes, 8x Independent Channels registered, ECC
VIDEO	GRAPHICS	1 DisplayPort 1.1a/1920x1200 32bpp@60Hz ASPEED AS2600
AUDIO – OPTIONAL ADD-IN CARD	AUDIO CODEC AUDIO INTERFACE	Tempo Semiconductor 92HD68D 8-Channel (HD), line-in, line-out, mic in, 3.5mm jack, 9- pin header
NETWORK CONNECTION	ETHERNET 1/2	Intel® X710 with dual 100/1000/10000 MBit/s PXE Support & Teaming
PERIPHERAL	USB SERIAL PORT	4x USB 3.1 Gen 1 (rear I/O, Type-A) 2x USB 3.1 Gen 1 (by header) 1x RS232 (rear I/O, DB9 connector)
STORAGE & EXPANSION	SATA M.2 PCIe/NVMe PCIe SLOTS	6x SATA III Interface (up to 6GBit/s), NCQ, AHCI, Intel VROC SATA RAID 0/1/5/10 2x M.2 2280/2242 (Key-M, PCIe/NVMe Gen5 x4 SSD modules), Intel VMD NVMe RAID 0/1 (license required) 3x 16 lanes Gen5 2x 8 lanes Gen5 ("closed slot")
POWER	CONNECTOR	ATX (Multirail) 24- pin, 2x 8-pin, 1x 6-pin sockets
FIRMWARE	BIOS WATCHDOG REAL TIME CLOCK TPM	AMI Aptio 5.x (UEFI) BIOS Modified and adapted by Kontron; Recovery BIOS, SM-BIOS (DMI), BIOS and CPU Microcode Update, Quick Boot, Logo Boot, Quiet Boot, Plug & Play, Automatic DRAM and PCIe Configuration, BIOS Support for S.M.A.R.T., Advanced Power Management, Wake on time from S5. HW No legacy OS support, no MBR support (UEFI only) Onboard via BMC Integrated TPM V2.0, Discrete, Infineon SLM 9670AQ2.0
SYSTEM CONTROL	FP HEADER FAN SECURITY	1x Header for Reset button, HDD LED & External Speaker, Power button, Power LED 6x 4- pin header, controlled via BMC Secure Boot, Recovery BIOS, BIOS Password, Boot Sequence Control, Write Protection for Flash BIOS, Trusted Platform Module (TPM)
SOFTWARE	OS SUPPORT	Linux x86_64 Windows Server 2022
MECHANICAL ENVIRONMENTAL CERTIFICATION	DIMENSIONS (LxW) OPERATING TEMPERATURE EMC & SAFETY	ATX: 9.6"x12" (244x305 mm) 0 °C - 60 °C FCC Part 15 Class A, ICES-003 Class A, cCSAus IEC62368-1, CE/UKCA (Planned)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Industrial Motherboards](#) category:

Click to view products by [Kontron](#) manufacturer:

Other Similar products are found below :

[S26361-F5110-V162](#) [IMB-M47](#) [AIMB-233G2-U7A1E](#) [AIMB-277G2-00A1E](#) [AIMB-277L-00A1E](#) [AIMB-288EH-N0A1](#) [AIMB-586L-00A1E](#)
[IMBA-R680-R11](#) [1070-9666](#) [F5120-V181](#) [F5120-V197](#) [F5120-V198](#) [F5120-V200](#) [F5120-V202](#) [F5120-V242](#) [F5120-V243](#) [F5120-V246](#)
[F5120-V244](#) [F5120-V241](#)