


# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### General Information



#### GENERAL DESCRIPTION

The MLO® Low Pass Filters are low profile passive devices with best in class performance based on AVX's patented multilayer organic high density interconnect technology. The MLO® low pass filters utilize high dielectric constant and low loss materials to realize high Q passive printed elements, such as inductors and capacitors, in a multilayer stack. This results in a 50Ω Low Pass Filter design. MLO® Low Pass Filters can support both a variety of frequency bands and multiple wireless standards, and are less than 1.0mm in thickness. All filters are expansion matched to most organic PCB materials, thereby resulting in improved reliability over standard Si and ceramic devices.

#### FEATURES

- Wide Frequency Range
- Excellent Isolation
- Low Loss
- Expansion matched to PCB
- 50Ω Impedance
- Surface Mountable
- RoHS Compliant

#### APPLICATIONS

- Mobile Communication
- GPS
- Vehicle location systems
- Wireless LANs
- Satellite Receivers
- Instrumentation

#### LAND GRID ARRAY ADVANTAGES

- Inherent Low Profile
- Excellent Solderability
- Better Heat Dissipation

#### HOW TO ORDER

<b>LP</b> T <b>Series</b> Low Pass Filters	<b>OB</b> T <b>Case Size</b> 0A = 2616 0B = 3116 0C = 3416 0D = 4016 1E = 4617 2E = 4614 0E = 4617 0F = 5021	<b>A</b> T <b>Type</b>	<b>1330</b> T <b>Frequency</b> in MHz	<b>A</b> T <b>Standard Testing</b>	<b>7</b> T <b>Termination</b> 7 - Gold	<b>00</b> T <b>Package Code</b> 00 - Standard TR - 1000 pcs Tape & Reel TR\250 - 250 pcs Tape & Reel
---	--	------------------------------	--	--	---	---

#### QUALITY INSPECTION

Finished Parts are 100% electrically tested

#### TERMINATION

All finishes are compatible with automatic soldering technologies: Pb free reflow, wave soldering, vapor phase, and manual soldering.

#### OPERATING TEMPERATURE

-55°C to +85°C



For RoHScompliant products, please select correct termination style



**S2P FILES, DRAWING AND OTHER INFORMATION AVAILABLE IN LINK ON INDIVIDUAL DATASHEETS**

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### ELECTRICAL SPECIFICATIONS

Part Number	IL < 1.2dB Passband DC - f0 (GHz)	Passband Typical (dB)	Typical 3dB (GHz)	30dB Rejection		Power (W)	Thickness Mils
				Min (GHz)	Max (GHz)		
LP0FA0054A7**	0.054	-0.9	0.071	0.083	0.700	4 Watts	40
LP0FA0056A7**	0.057	-0.9	0.072	0.089	0.700	4 Watts	40
LP0FA0057A7**	0.057	-0.9	0.073	0.090	0.700	4 Watts	40
LP0EA0076A7**	0.076	-0.9	0.096	0.115	0.800	4 Watts	40
LP0EA0080A7**	0.080	-0.9	0.102	0.121	0.800	4 Watts	40
LP0EA0082A7**	0.082	-0.8	0.105	0.125	0.800	4 Watts	40
LP0DA0102A7**	0.102	-0.9	0.132	0.155	0.900	4 Watts	40
LP0DA0107A7**	0.107	-0.9	0.136	0.160	0.900	4 Watts	40
LP0DA0112A7**	0.112	-0.9	0.143	0.167	0.900	4 Watts	40
LP0AA0141A7**	0.141	-0.8	0.172	0.212	2.000	4 Watts	40
LP0AA0145A7**	0.145	-0.9	0.174	0.224	2.000	4 Watts	40
LP0AA0149A7**	0.149	-0.8	0.182	0.224	2.000	4 Watts	40
LP0AA0153A7**	0.153	-0.8	0.189	0.231	2.000	4 Watts	40
LP0AA0156A7**	0.156	-0.8	0.192	0.236	2.000	4 Watts	40
LP0AA0161A7**	0.161	-0.8	0.197	0.241	2.000	4 Watts	40
LP0AA0171A7**	0.171	-0.8	0.207	0.255	2.000	4 Watts	40
LP0AA0174A7**	0.174	-0.8	0.212	0.260	2.000	4 Watts	40
LP0AA0185A7**	0.185	-0.8	0.220	0.270	2.000	4 Watts	40
LP0AA0194A7**	0.194	-0.8	0.241	0.289	2.000	4 Watts	40
LP0AA0204A7**	0.204	-0.8	0.245	0.293	2.000	4 Watts	40
LP0AA0209A7**	0.209	-0.8	0.252	0.303	2.000	4 Watts	40
LP0AA0279A7**	0.279	-0.8	0.339	0.398	2.000	4 Watts	40
LP0AA0290A7**	0.290	-0.8	0.351	0.415	2.000	4 Watts	40
LP0AA0299A7**	0.299	-0.8	0.363	0.427	2.000	4 Watts	40
LP0AA0316A7**	0.316	-0.8	0.378	0.446	2.000	4 Watts	40
LP0AA0322A7**	0.322	-0.8	0.386	0.454	2.000	4 Watts	40
LP0AA0327A7**	0.327	-0.8	0.392	0.462	2.000	4 Watts	40



Click on part number to see full specifications

\*\*Packaging: 00 = waffle pack, TR = 1000pcs T&R, TR1250 = 250pcs T&R

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters



### ELECTRICAL SPECIFICATIONS

Part Number	IL < 1.2dB	Passband Typical (dB)	Typical 3dB (GHz)	30dB Rejection		40dB Rejection		Power (W)	Thickness Mils
	Passband DC - f0 (GHz)			Min (GHz)	Max (GHz)	Min (GHz)	Max (GHz)		
LP1EA0320A7**	0.320	-0.9	0.37	0.45	3.20	0.46	1.20	4	40
LP0DA0410A7**	0.410	-0.9	0.49	0.58	5.00	0.60	4.00	4	22
LP1EA0500A7**	0.500	-0.9	0.57	0.67	4.50	0.68	2.25	4	40
LP0CA0550A7**	0.550	-0.9	0.67	0.79	6.00	0.81	4.00	4	22
LP0FA0600A7**	0.600	-1.0	0.77	0.93	9.00	0.96	9.00	4	22
LP1EA0720A7**	0.720	-0.8	0.83	0.97	5.00	0.99	5.00	4	40
LP0BA0790A7**	0.790	-0.9	0.94	1.10	9.00	1.12	7.00	4	22
LP0BA0960A7**	0.960	-0.9	1.15	1.34	4.00	-	-	4	22
LP0BA1010A7**	1.010	-0.9	1.22	1.42	4.00	-	-	4	22
LP0BA1030A7**	1.030	-0.9	1.30	1.63	6.47	1.71	6	4	22
LP2EA1080A7**	1.080	-0.8	1.21	1.46	5.00	1.48	3.40	4	40
LP0BA1220A7**	1.220	-0.8	1.37	1.55	5.50	1.89	5.00	4	22
LP0BA1330A7**	1.330	-0.9	1.52	1.72	6.00	-	-	4	22
LP0BA1390A7**	1.390	-0.9	1.57	1.79	6.00	-	-	4	22
LP0AA1590A7**	1.590	-0.8	1.84	2.11	9.00	2.15	7.75	4	40
LP0AA1610A7**	1.610	-0.9	1.80	2.22	9.00	2.32	5.00	4	22
LP0AA1620A7**	1.620	-0.7	1.87	2.15	7.00	2.19	6.00	4	40
LP0AA1630A7**	1.630	-0.7	1.91	2.18	8.00	2.22	3.00	4	40
LP0AA1670A7**	1.670	-0.7	2.00	2.30	8.00	2.36	7.00	4	40
LP2EA1680A7**	1.680	-0.8	1.86	2.18	9.00	2.22	4.00	4	40
LP0AA1680A7**	1.680	-0.7	2.01	2.32	8.00	2.38	7.00	4	40
LP2EA1770A7**	1.770	-0.8	1.97	2.33	5.00	2.37	4.50	4	40
LP0DA1780A7**	1.780	-0.9	1.97	2.27	5.00	2.35	4.00	4	40
LP0DA1800A7**	1.800	-0.8	2.02	2.30	6.00	2.40	4.00	4	40
LP0DA1810A7**	1.810	-0.8	2.04	2.29	6.00	2.48	4.00	4	40
LP0DA1840A7**	1.840	-0.7	2.04	2.27	5.50	2.44	4.00	4	40
LP0DA1880A7**	1.880	-0.8	2.05	2.28	6.00	2.42	4.00	4	40
LP0DA1890A7**	1.890	-0.8	2.13	2.38	7.00	-	-	4	40
LP0DA1950A7**	1.950	-0.8	2.20	2.53	8.00	-	-	4	40
LP0DA2100A7**	2.100	-0.8	2.37	2.68	9.00	2.72	5.11	4	22
LP0DA2140A7**	2.140	-0.7	2.38	2.68	9.00	2.72	5.23	4	22
LP0DA2160A7**	2.160	-0.8	2.41	2.72	5.00	-	-	4	22
LP0DA2190A7**	2.190	-0.6	2.44	2.79	6.50	2.93	4.00	4	40
LP0DA2200A7**	2.200	-0.8	2.50	2.84	5.00	4.00	5.00	4	22
LP0DA2210A7**	2.210	-0.8	2.60	2.98	8.50	3.25	4.25	4	40
LP0DA2260A7**	2.260	-0.8	2.50	2.86	5.00	4.00	5.00	4	22
LP0AA2300A7**	2.300	-0.9	2.56	3.15	9.00	3.26	9.00	4	22
LP0AA2490A7**	2.490	-0.7	2.80	3.98	9.00	3.79	5.00	4	40
LP2EA2530A7**	2.530	-0.7	2.87	3.28	9.00	3.32	6.50	4	40
LP0AA2590A7**	2.590	-0.7	2.89	3.71	9.00	3.87	5.20	4	40
LP2EA2600A7**	2.600	-0.7	2.95	3.40	9.00	3.50	6.00	4	40
LP0AA2640A7**	2.640	-0.8	2.97	3.82	9.00	3.98	5.50	4	40
LP0AA2910A7**	2.910	-0.8	3.43	4.07	9.00	4.80	8.00	4	22
LP0AA2980A7**	2.980	-0.7	3.52	4.17	9.00	4.29	8.00	4	22
LP0AA3100A7**	3.100	-0.7	3.65	4.32	9.00	5.00	8.00	4	22
LP0AA3160A7**	3.160	-0.8	3.47	4.36	9.00	4.47	9.00	4	22
LP0AA4080A7**	4.080	-0.7	5.03	5.62	9.00	5.69	9.00	4	22
LP0AA4150A7**	4.150	-0.6	5.16	5.75	9.00	5.82	9.00	4	22
LP0AA4210A7**	4.210	-0.7	5.28	5.87	9.00	6.16	9.00	4	22
LP0AA4370A7**	4.370	-0.8	4.84	6.00	9.00	6.32	9.00	4	22
LP0AA6160A7**	6.160	-0.9	7.09	8.59	13.00	8.82	11.50	4	22

[Click on part number to see full specifications](#)

\*\*Packaging: 00 = waffle pack, TR = 1000pcs T&R, TR1250 = 250pcs T&R



# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP1EA0320A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.320 GHz	1.2 dB	Max
	DC - 0.320 GHz	0.9 dB	Typ
	3dB Cutoff	0.37 GHz	Typ
<b>Rejection</b>	0.45 - 3.20 GHz	30dB	Min
	0.46 - 1.20 GHz	40dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max

[Click here to return to main table.](#)





**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE 1E

Bottom View

inches (mm)

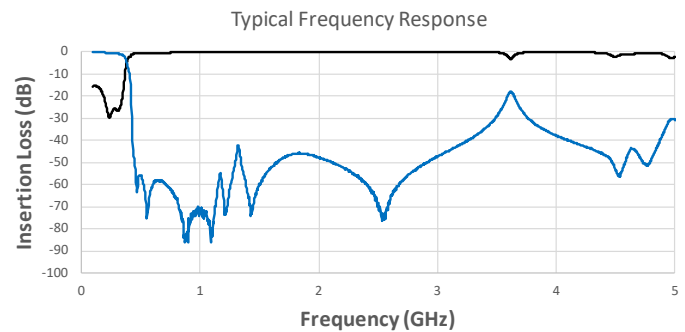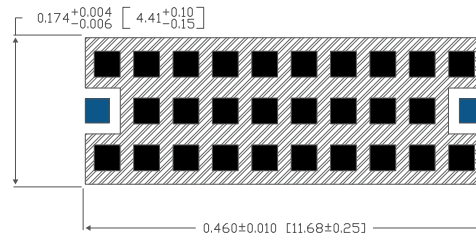

### LP0DA0410A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.410 GHz	1.2 dB	Max
	DC - 0.410 GHz	0.9 dB	Typ
	3dB Cutoff	0.49 GHz	Typ
<b>Rejection</b>	0.58 - 5.00 GHz	30dB	Min
	0.60 - 4.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max

[Click here to return to main table.](#)





**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE D

Bottom View

inches (mm)

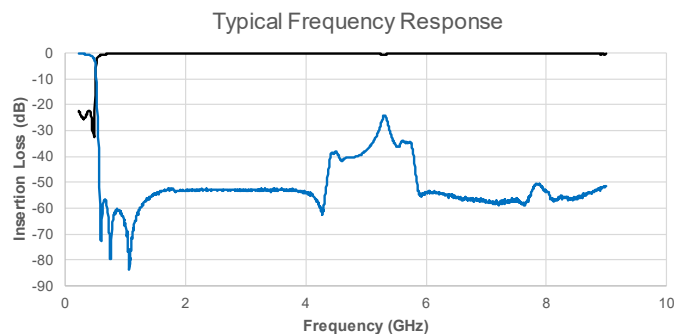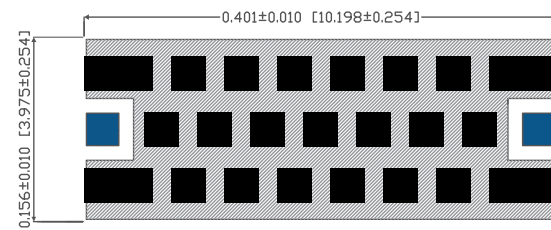

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP1EA0500A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.500 GHz	1.2 dB	Max
	DC - 0.500 GHz	0.9 dB	Typ
	3dB Cutoff	0.57 GHz	Typ
<b>Rejection</b>	0.67 - 4.50 GHz	30dB	Min
	0.68 - 2.25 GHz	40dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE 1E

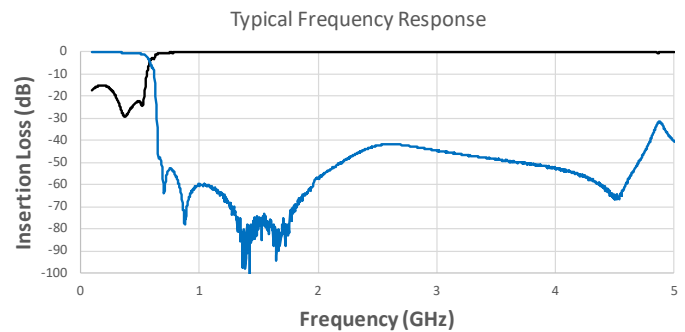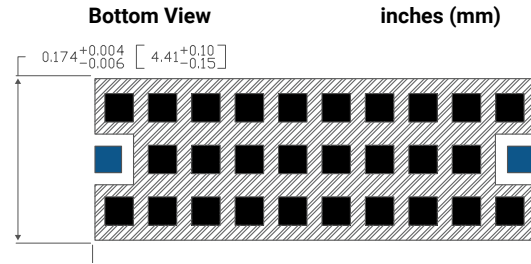

### LP0CA0550A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.550 GHz	1.2 dB	Max
	DC - 0.550 GHz	0.9 dB	Typ
	3dB Cutoff	0.67 GHz	Typ
<b>Rejection</b>	0.79 - 6.00 GHz	30dB	Min
	0.81 - 4.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE C

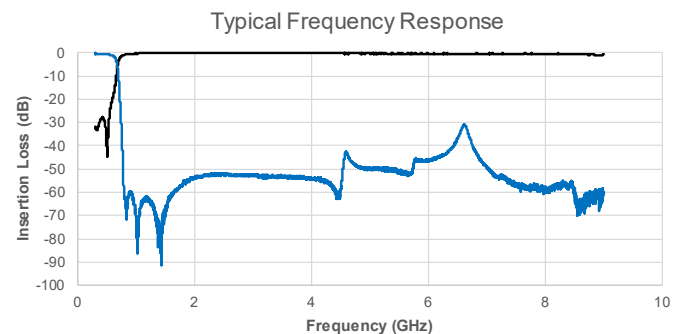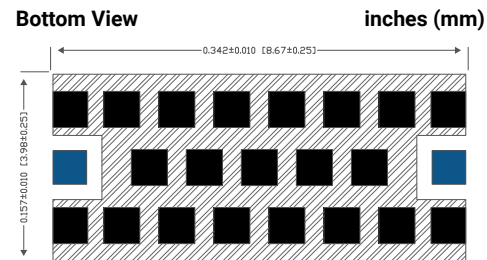

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0FA0600A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.600 GHz	1.2 dB	Max
	DC - 0.600 GHz	1.0 dB	Typ
	3dB Cutoff	0.77 GHz	Typ
<b>Rejection</b>	0.93 - 9.00 GHz	30dB	Min
	0.96 - 9.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max


[Click here to return to main table.](#)




**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE F

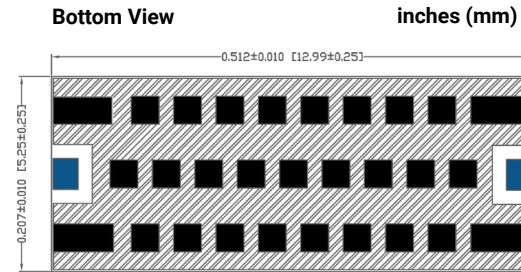

Typical Frequency Response

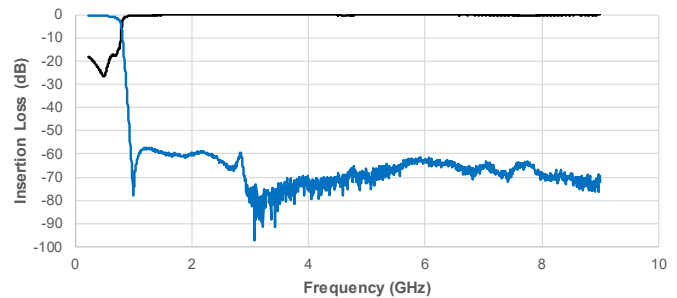

### LP1EA0720A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.720 GHz	1.2 dB	Max
	DC - 0.720 GHz	0.8 dB	Typ
	3dB Cutoff	0.83 GHz	Typ
<b>Rejection</b>	0.97 - 5.00 GHz	30dB	Min
	0.99 - 5.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max


[Click here to return to main table.](#)




**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE 1E

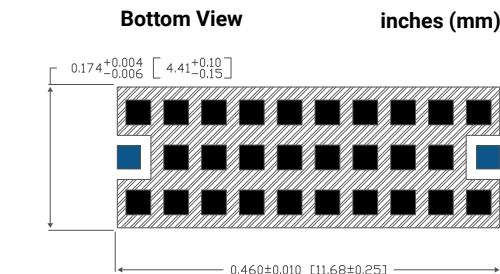

Typical Frequency Response

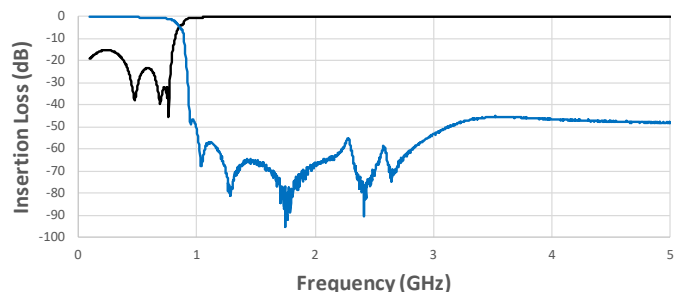

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0BA0790A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.790 GHz	1.2 dB	Max
	DC - 0.795 GHz	0.9 dB	Typ
	3dB Cutoff	0.94 GHz	Typ
<b>Rejection</b>	1.10 - 9.00 GHz	30dB	Min
	1.12 - 7.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE B

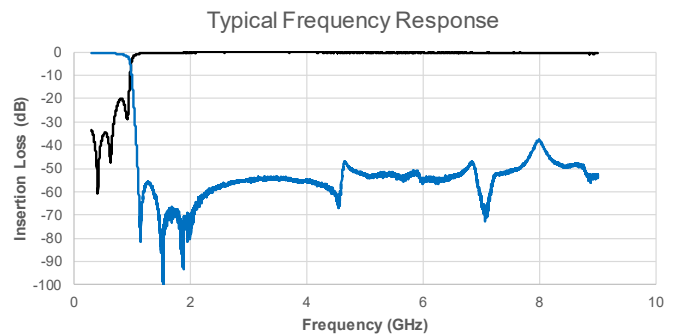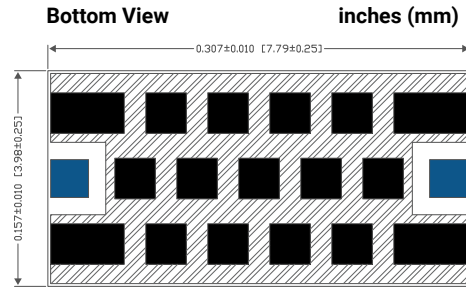

### LP0BA0960A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.960 GHz	1.2 dB	Max
	DC - 0.960 GHz	0.9 dB	Typ
	3dB Cutoff	1.15 GHz	Typ
<b>Rejection</b>	1.34 - 4.00 GHz	30dB	Min
	- GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE B

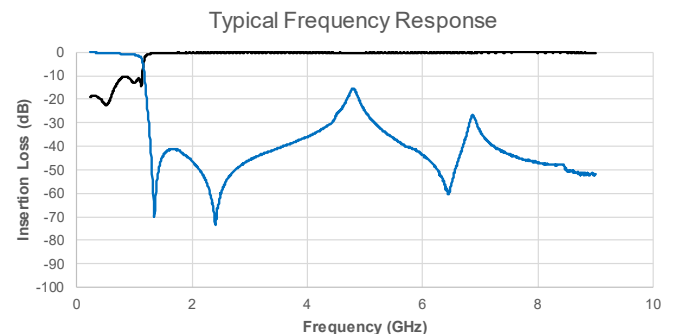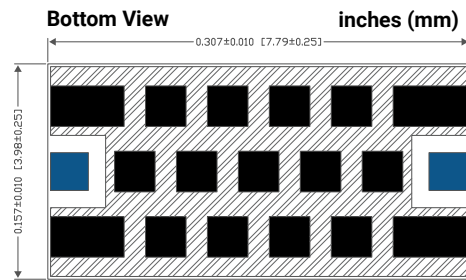

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0BA1010A7\*\*

#### ELECTRICAL SPECIFICATIONS


<b>Pass Band</b>	DC - 1.010 GHz	1.2 dB	Max
	DC - 1.010 GHz	0.9 dB	Typ
	3dB Cutoff	1.22 GHz	Typ
<b>Rejection</b>	1.42 - 4.00 GHz	30dB	Min
	- GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max

[Click here to return to main table.](#)


 **CLICK HERE TO DOWNLOAD DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE B

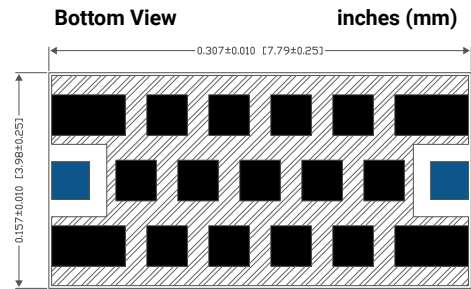

Typical Frequency Response

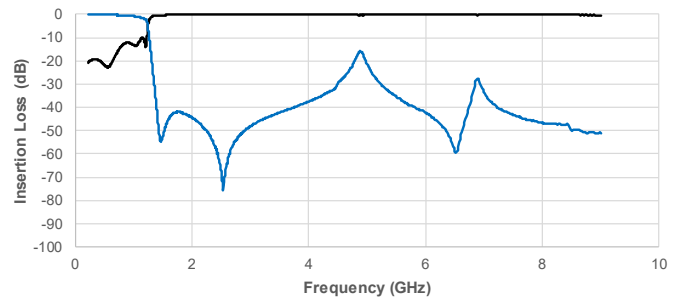

### LP0BA1030A7\*\*

#### ELECTRICAL SPECIFICATIONS


<b>Pass Band</b>	DC - 1.030 GHz	1.2 dB	Max
	DC - 1.030 GHz	0.9 dB	Typ
	3dB Cutoff	1.30 GHz	Typ
<b>Rejection</b>	1.63 - 6.47 GHz	30dB	Min
	1.71 - 6 GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max

[Click here to return to main table.](#)


 **CLICK HERE TO DOWNLOAD DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE B

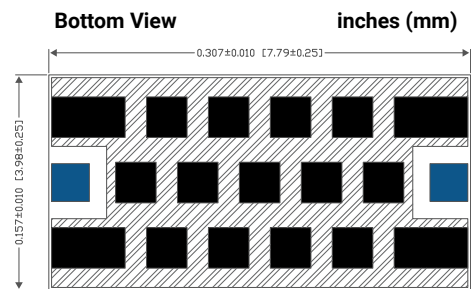

Typical Frequency Response

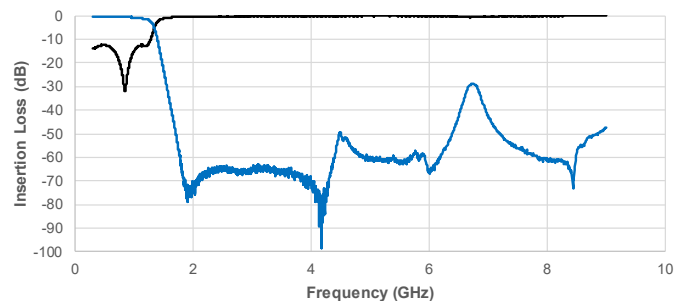

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP2EA1080A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 1.080 GHz	1.2 dB	Max
	DC - 1.080 GHz	0.8 dB	Typ
	3dB Cutoff	1.21 GHz	Typ
<b>Rejection</b>	1.46 - 5.00 GHz	30dB	Min
	1.48 - 3.40 GHz	40dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE 2E

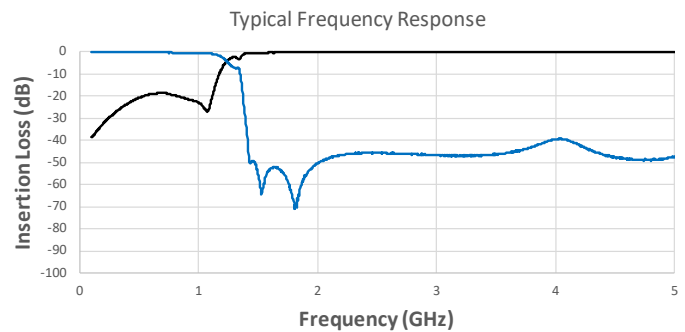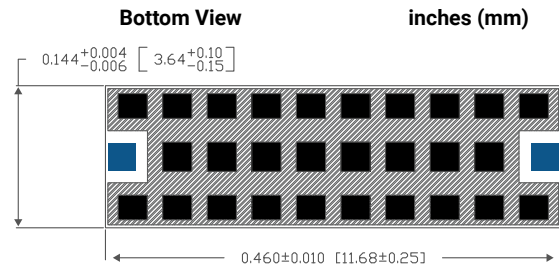

### LP0BA1220A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 1.220 GHz	1.2 dB	Max
	DC - 1.220 GHz	0.8 dB	Typ
	3dB Cutoff	1.37 GHz	Typ
<b>Rejection</b>	1.55 - 5.50 GHz	30dB	Min
	1.89 - 5.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE B

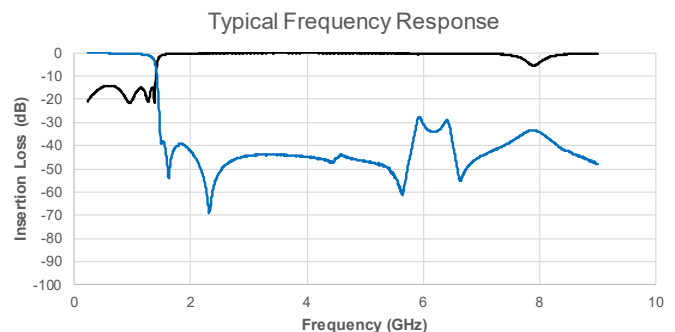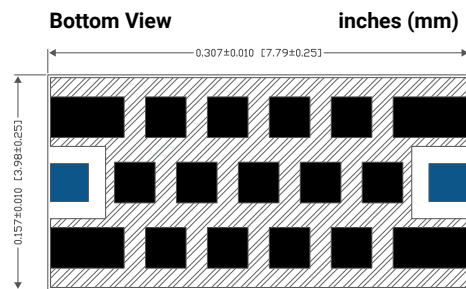

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0BA1330A7\*\*

#### ELECTRICAL SPECIFICATIONS



<b>Pass Band</b>	DC - 1.330 GHz	1.2 dB	Max
	DC - 1.330 GHz	0.9 dB	Typ
	3dB Cutoff	1.52 GHz	Typ
<b>Rejection</b>	1.72 - 6.00 GHz	30dB	Min
	- GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max

[Click here to return to main table.](#)

 **CLICK HERE TO DOWNLOAD DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE B

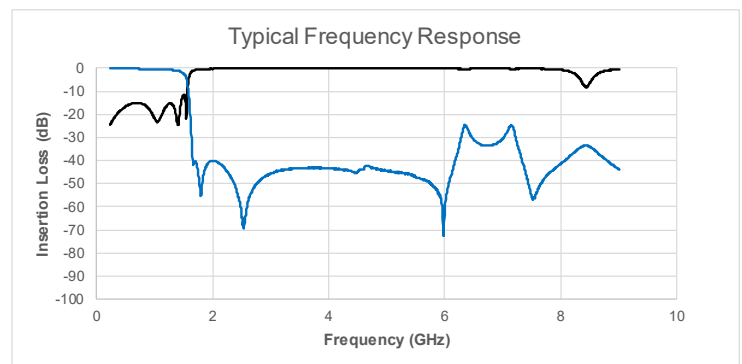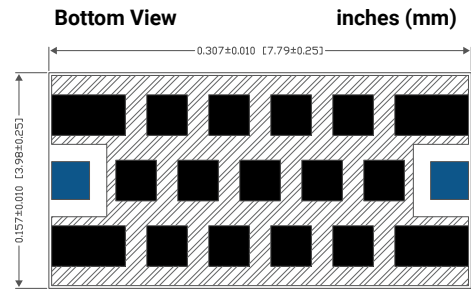

### LP0BA1390A7\*\*

#### ELECTRICAL SPECIFICATIONS



<b>Pass Band</b>	DC - 1.390 GHz	1.2 dB	Max
	DC - 1.390 GHz	0.9 dB	Typ
	3dB Cutoff	1.57 GHz	Typ
<b>Rejection</b>	1.79 - 6.00 GHz	30dB	Min
	- GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max

[Click here to return to main table.](#)

 **CLICK HERE TO DOWNLOAD DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE B

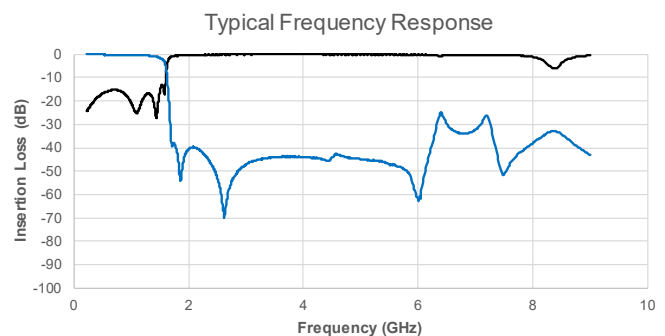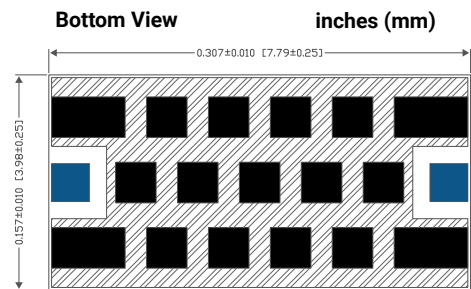

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0AA1590A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 1.590 GHz	1.2 dB	Max
	DC - 1.590 GHz	0.8 dB	Typ
	3dB Cutoff	1.84 GHz	Typ
<b>Rejection</b>	2.11 - 9.00 GHz	30dB	Min
	2.15 - 7.75 GHz	40dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max

[Click here to return to main table.](#)




**CLICK HERE TO DOWNLOAD  
DATA FILES**


\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

Bottom View inches (mm)

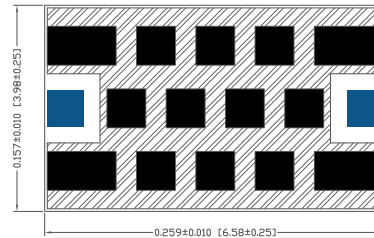

Typical Frequency Response

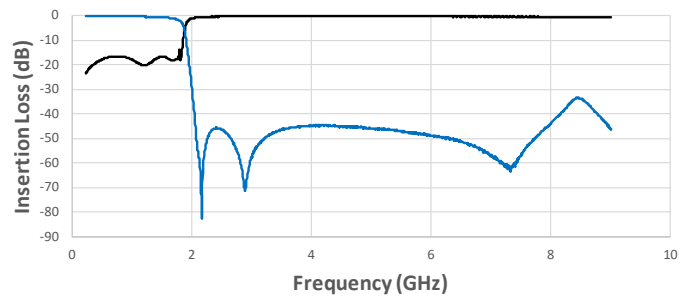

### LP0AA1610A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 1.610 GHz	1.2 dB	Max
	DC - 1.610 GHz	0.9 dB	Typ
	3dB Cutoff	1.80 GHz	Typ
<b>Rejection</b>	2.22 - 9.00 GHz	30dB	Min
	2.32 - 5.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max

[Click here to return to main table.](#)




**CLICK HERE TO DOWNLOAD  
DATA FILES**


\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

Bottom View inches (mm)

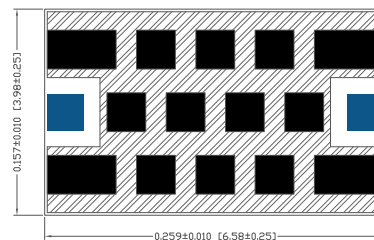

Typical Frequency Response

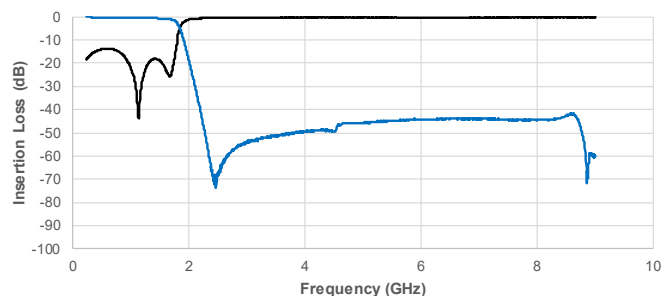

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0AA1620A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 1.620 GHz	1.2 dB	Max
	DC - 1.620 GHz	0.7 dB	Typ
	3dB Cutoff	1.87 GHz	Typ
<b>Rejection</b>	2.15 - 7.00 GHz	30dB	Min
	2.19 - 6.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
	<b>RF Power</b>	Power	4 Watts
			Max

[Click here to return to main table.](#)




**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files


#### DIMENSIONS – CASE SIZE A

Bottom View

inches (mm)

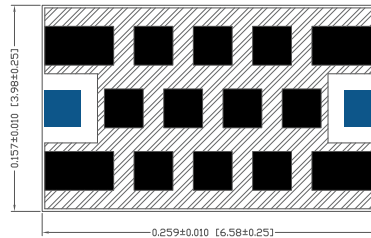

Typical Frequency Response

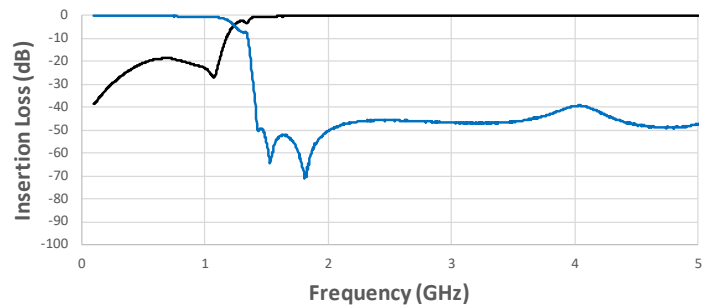

### LP0AA1630A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 1.630 GHz	1.2 dB	Max
	DC - 1.630 GHz	0.7 dB	Typ
	3dB Cutoff	1.91 GHz	Typ
<b>Rejection</b>	2.18 - 8.00 GHz	30dB	Min
	2.22 - 3.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
	<b>RF Power</b>	Power	4 Watts
			Max

[Click here to return to main table.](#)




**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files


#### DIMENSIONS – CASE SIZE A

Bottom View

inches (mm)

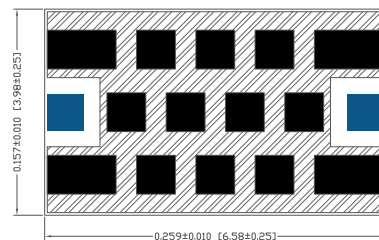

Typical Frequency Response

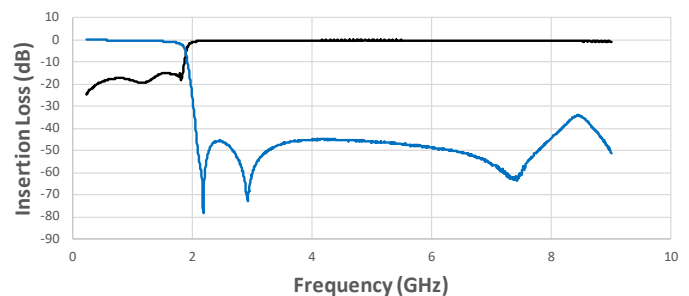

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0AA1670A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 1.670 GHz	1.2 dB	Max
	DC - 1.670 GHz	0.7 dB	Typ
	3dB Cutoff	2.00 GHz	Typ
<b>Rejection</b>	2.30 - 8.00 GHz	30dB	Min
	2.36 - 7.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max

[Click here to return to main table.](#)





**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

Bottom View inches (mm)

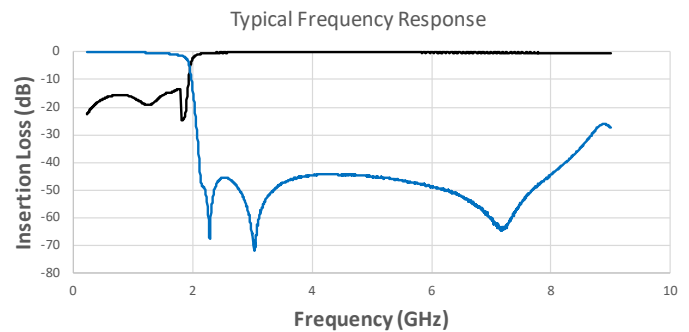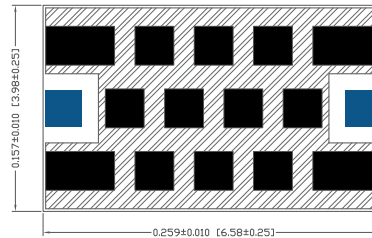

### LP2EA1680A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 1.680 GHz	1.2 dB	Max
	DC - 1.680 GHz	0.8 dB	Typ
	3dB Cutoff	1.86 GHz	Typ
<b>Rejection</b>	2.18 - 9.00 GHz	30dB	Min
	2.22 - 4.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max

[Click here to return to main table.](#)





**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE 2E

Bottom View inches (mm)

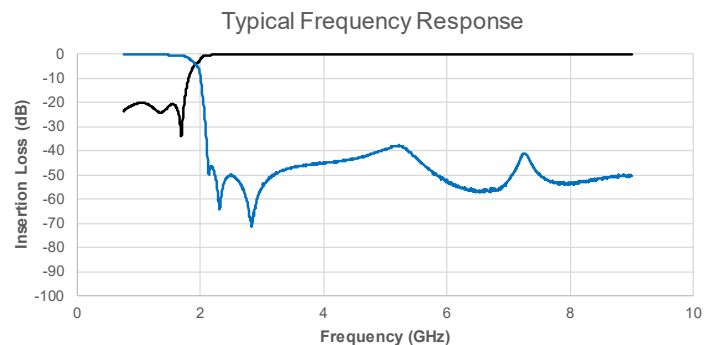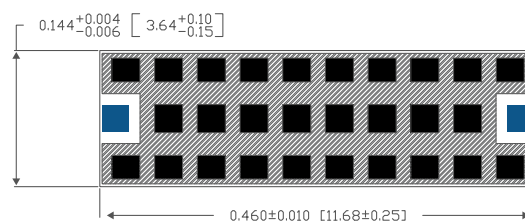

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0AA1680A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 1.680 GHz	1.2 dB	Max
	DC - 1.680 GHz	0.7 dB	Typ
	3dB Cutoff	2.01 GHz	Typ
<b>Rejection</b>	2.32 - 8.00 GHz	30dB	Min
	2.38 - 7.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
	<b>RF Power</b>	Power	4 Watts
			Max

[Click here to return to main table.](#)





**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

Bottom View inches (mm)

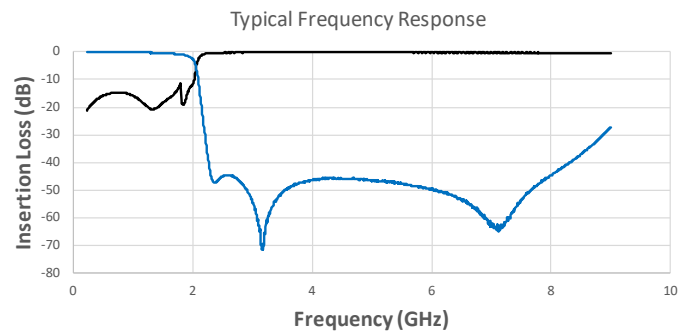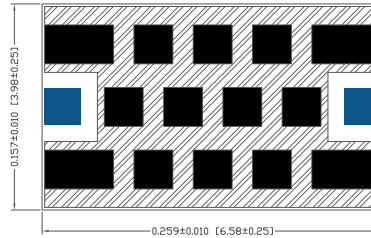

### LP2EA1770A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 1.770 GHz	1.2 dB	Max
	DC - 1.770 GHz	0.8 dB	Typ
	3dB Cutoff	1.97 GHz	Typ
<b>Rejection</b>	2.33 - 5.00 GHz	30dB	Min
	2.37 - 4.50 GHz	40dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
	<b>RF Power</b>	Power	4 Watts
			Max

[Click here to return to main table.](#)





**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE 2E

Bottom View inches (mm)

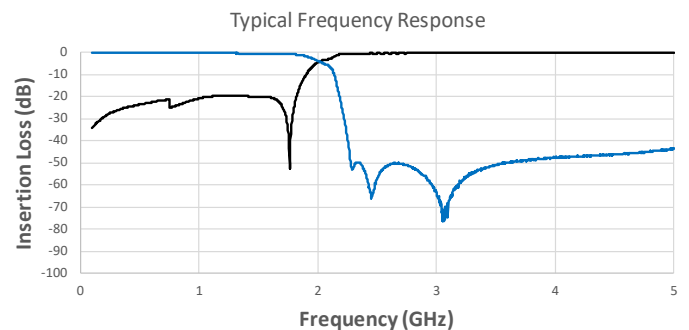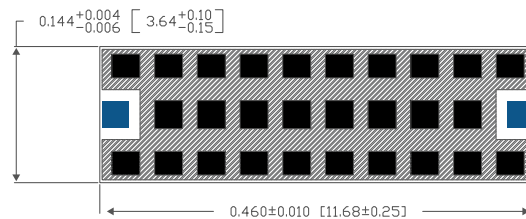

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0DA1780A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 1.780 GHz	1.2 dB	Max
	DC - 1.780 GHz	0.9 dB	Typ
	3dB Cutoff	1.97 GHz	Typ
<b>Rejection</b>	2.27 - 5.00 GHz	30dB	Min
	2.35 - 4.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max


[Click here to return to main table.](#)

 **CLICK HERE TO DOWNLOAD DATA FILES**


\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE D

**Bottom View** inches (mm)

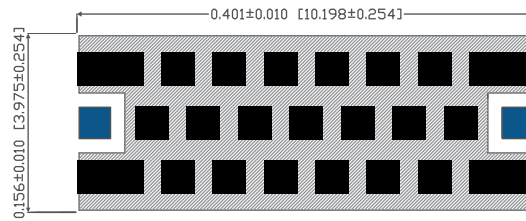

Typical Frequency Response

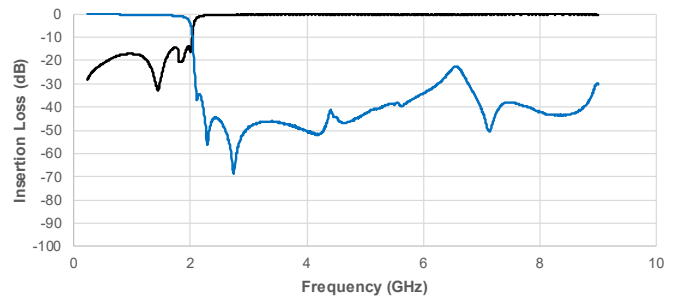

### LP0DA1800A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 1.800 GHz	1.2 dB	Max
	DC - 1.800 GHz	0.8 dB	Typ
	3dB Cutoff	2.02 GHz	Typ
<b>Rejection</b>	2.30 - 6.00 GHz	30dB	Min
	2.40 - 4.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	40Mils	Max
<b>RF Power</b>	Power	4 Watts	Max


[Click here to return to main table.](#)

 **CLICK HERE TO DOWNLOAD DATA FILES**


\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE D

**Bottom View** inches (mm)

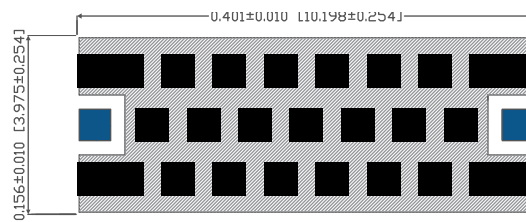

Typical Frequency Response

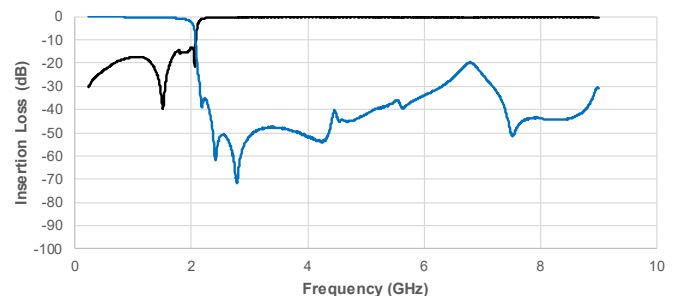

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0DA1810A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 1.810 GHz	1.2 dB	Max
	DC - 1.810 GHz	0.8 dB	Typ
	3dB Cutoff	2.04 GHz	Typ
<b>Rejection</b>	2.29 - 6.00 GHz	30dB	Min
	2.48 - 4.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max


[Click here to return to main table.](#)

 **CLICK HERE TO DOWNLOAD DATA FILES**


\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE D

Bottom View inches (mm)

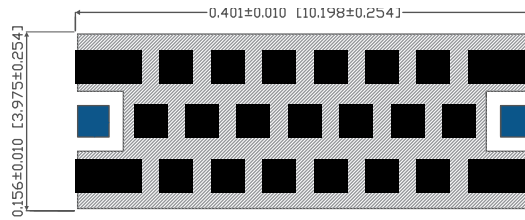

Typical Frequency Response

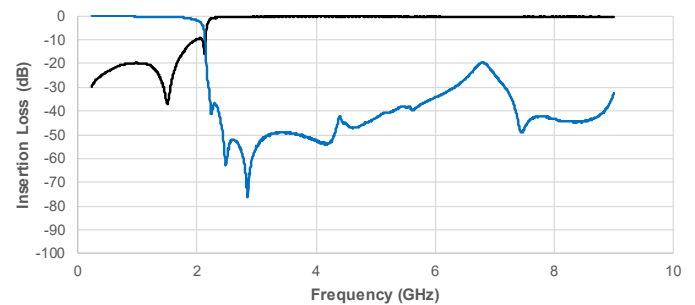

### LP0DA1840A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 1.840 GHz	1.2 dB	Max
	DC - 1.840 GHz	0.7 dB	Typ
	3dB Cutoff	2.04 GHz	Typ
<b>Rejection</b>	2.27 - 5.50 GHz	30dB	Min
	2.44 - 4.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	40Mils	Max
<b>RF Power</b>	Power	4 Watts	Max


[Click here to return to main table.](#)

 **CLICK HERE TO DOWNLOAD DATA FILES**


\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE D

Bottom View inches (mm)

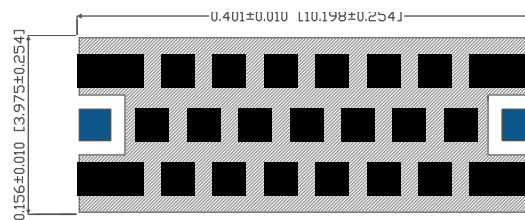

Typical Frequency Response

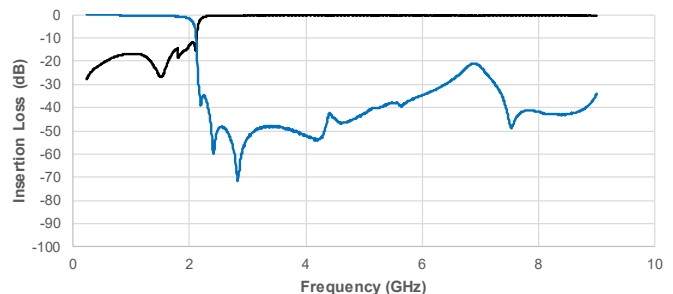

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0DA1880A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 1.880 GHz	1.2 dB	Max
	DC - 1.880 GHz	0.8 dB	Typ
	3dB Cutoff	2.05 GHz	Typ
<b>Rejection</b>	2.28 - 6.00 GHz	30dB	Min
	2.42 - 4.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)

 **CLICK HERE TO DOWNLOAD DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE D

Bottom View inches (mm)

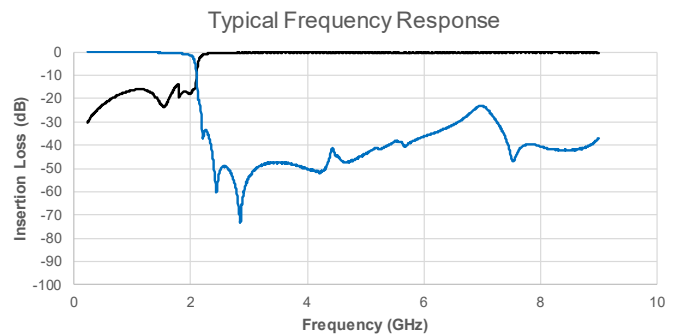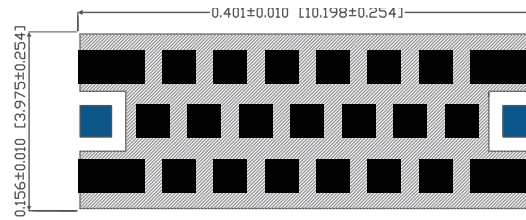

### LP0DA1890A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 1.890 GHz	1.2 dB	Max
	DC - 1.890 GHz	0.8 dB	Typ
	3dB Cutoff	2.13 GHz	Typ
<b>Rejection</b>	2.38 - 7.00 GHz	30dB	Min
	- GHz	40dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)

 **CLICK HERE TO DOWNLOAD DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE D

Bottom View inches (mm)

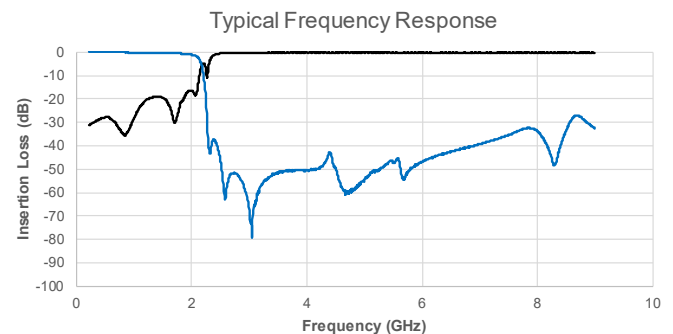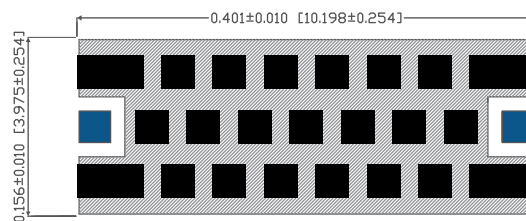

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0DA1950A7\*\*

#### ELECTRICAL SPECIFICATIONS



<b>Pass Band</b>	DC - 1.950 GHz	1.2 dB	Max
	DC - 1.950 GHz	0.8 dB	Typ
	3dB Cutoff	2.20 GHz	Typ
<b>Rejection</b>	2.53 - 8.00 GHz	30dB	Min
	- GHz	40dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max

[Click here to return to main table.](#)

 **CLICK HERE TO DOWNLOAD DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE D

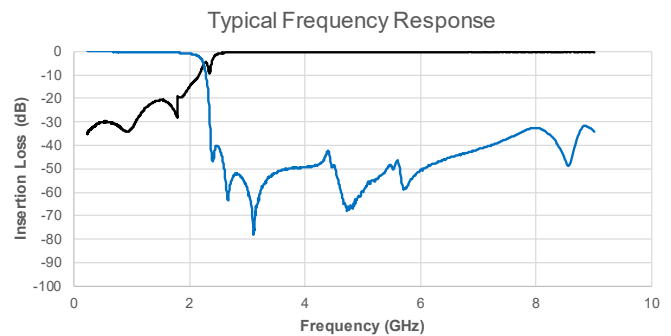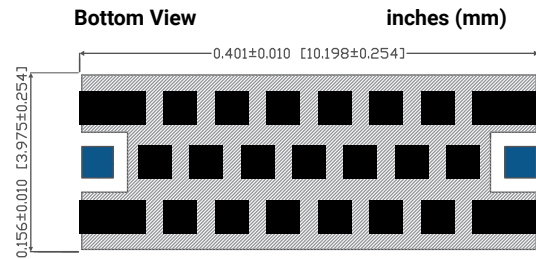

### LP0DA2100A7\*\*

#### ELECTRICAL SPECIFICATIONS



<b>Pass Band</b>	DC - 2.100 GHz	1.2 dB	Max
	DC - 2.100 GHz	0.8 dB	Typ
	3dB Cutoff	2.37 GHz	Typ
<b>Rejection</b>	2.68 - 9.00 GHz	30dB	Min
	2.72 - 5.11 GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max

[Click here to return to main table.](#)

 **CLICK HERE TO DOWNLOAD DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE D

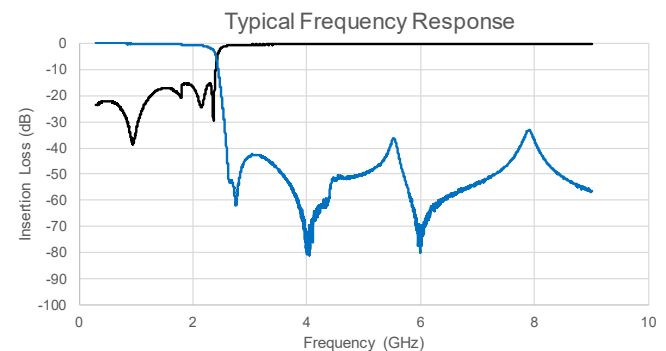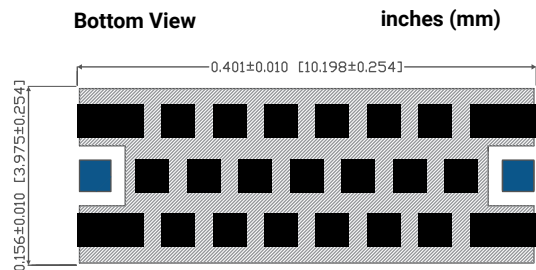

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0DA2140A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 2.140 GHz	1.2 dB	Max
	DC - 2.140 GHz	0.7 dB	Typ
	3dB Cutoff	2.38 GHz	Typ
<b>Rejection</b>	2.68 - 9.00 GHz	30dB	Min
	2.72 - 5.23 GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE D

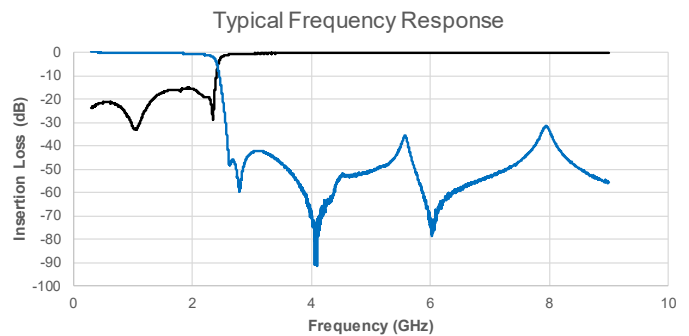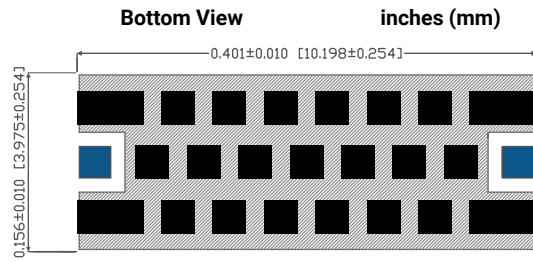

### LP0DA2160A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 2.160 GHz	1.2 dB	Max
	DC - 2.160 GHz	0.8 dB	Typ
	3dB Cutoff	2.41 GHz	Typ
<b>Rejection</b>	2.72 - 5.00 GHz	30dB	Min
	- GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE D

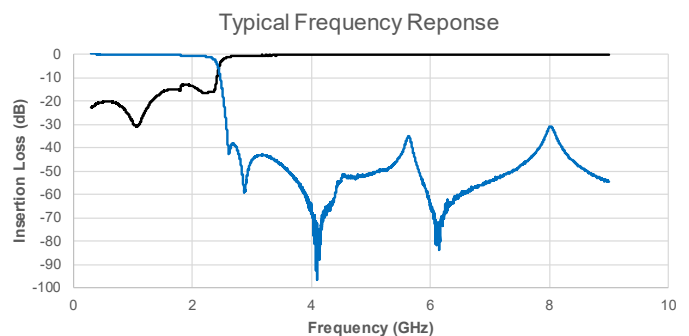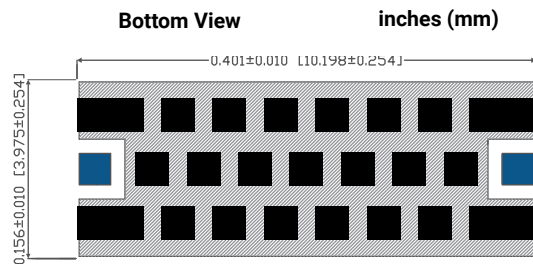

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0DA2190A7\*\*

#### ELECTRICAL SPECIFICATIONS


<b>Pass Band</b>	DC - 2.190 GHz	1.2 dB	Max
	DC - 2.190 GHz	0.6 dB	Typ
	3dB Cutoff	2.44 GHz	Typ
<b>Rejection</b>	2.79 - 6.50 GHz	30dB	Min
	2.93 - 4.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max

[Click here to return to main table.](#)


 **CLICK HERE TO DOWNLOAD DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE D

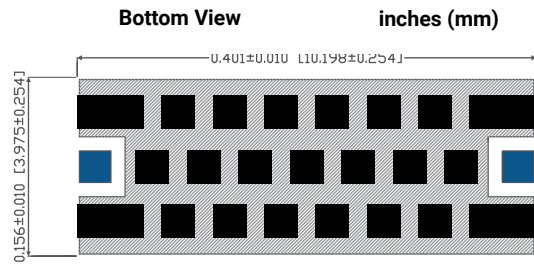

Typical Frequency Response

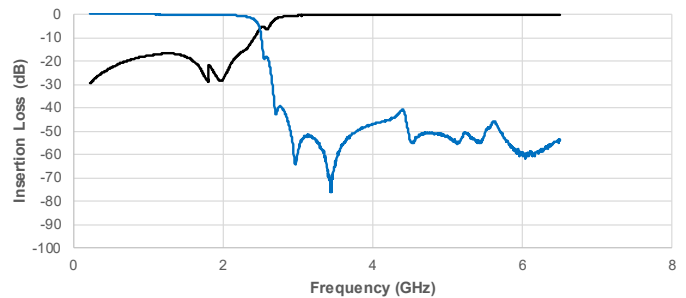

### LP0DA2200A7\*\*

#### ELECTRICAL SPECIFICATIONS


<b>Pass Band</b>	DC - 2.200 GHz	1.2 dB	Max
	DC - 2.200 GHz	0.8 dB	Typ
	3dB Cutoff	2.50 GHz	Typ
<b>Rejection</b>	2.84 - 5.00 GHz	30dB	Min
	4.00 - 5.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max

[Click here to return to main table.](#)


 **CLICK HERE TO DOWNLOAD DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE D

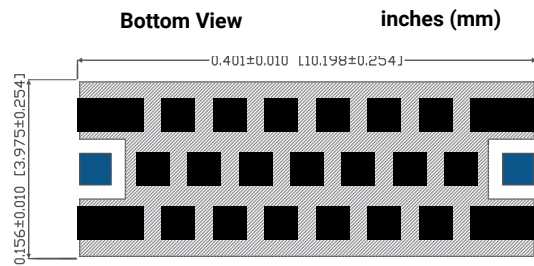

Typical Frequency Response

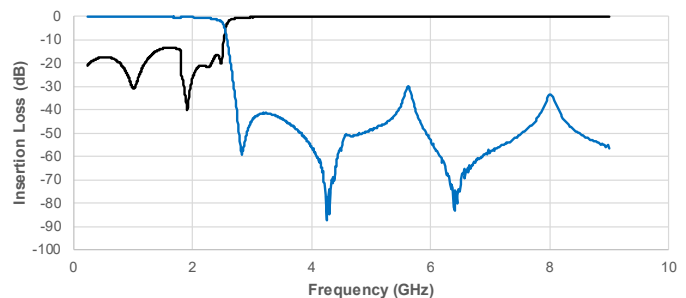

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0DA2210A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 2.210 GHz	1.2 dB	Max
	DC - 2.210 GHz	0.8 dB	Typ
	3dB Cutoff	2.60 GHz	Typ
<b>Rejection</b>	2.98 - 8.50 GHz	30dB	Min
	3.25 - 4.25 GHz	40dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max


[Click here to return to main table.](#)

 **CLICK HERE TO DOWNLOAD DATA FILES**


\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE D

Bottom View inches (mm)

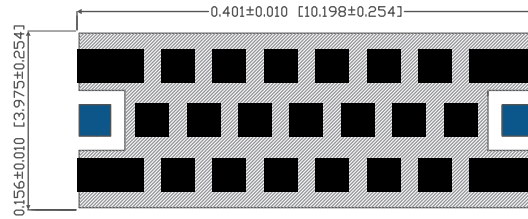

Typical Frequency Response

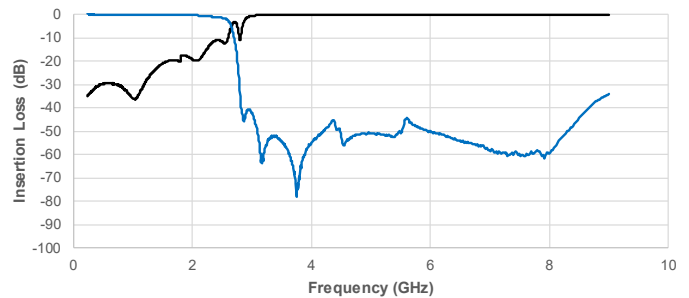

### LP0DA2260A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 2.260 GHz	1.2 dB	Max
	DC - 2.260 GHz	0.8 dB	Typ
	3dB Cutoff	2.50 GHz	Typ
<b>Rejection</b>	2.86 - 5.00 GHz	30dB	Min
	4.00 - 5.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max


[Click here to return to main table.](#)

 **CLICK HERE TO DOWNLOAD DATA FILES**


\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE D

Bottom View inches (mm)

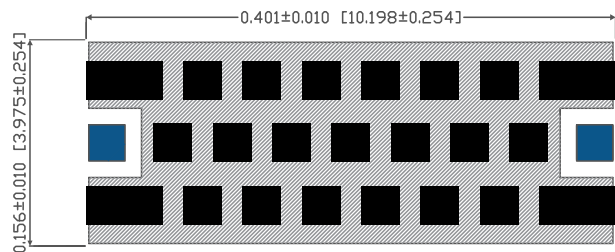

Typical Frequency Response

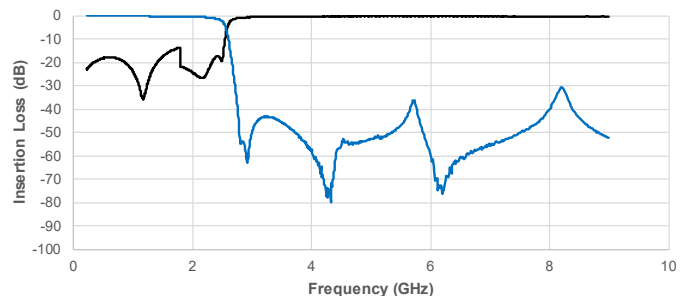

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0AA2300A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 2.300 GHz	1.2 dB	Max
	DC - 2.300 GHz	0.9 dB	Typ
	3dB Cutoff	2.56 GHz	Typ
<b>Rejection</b>	3.15 - 9.00 GHz	30dB	Min
	3.26 - 9.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

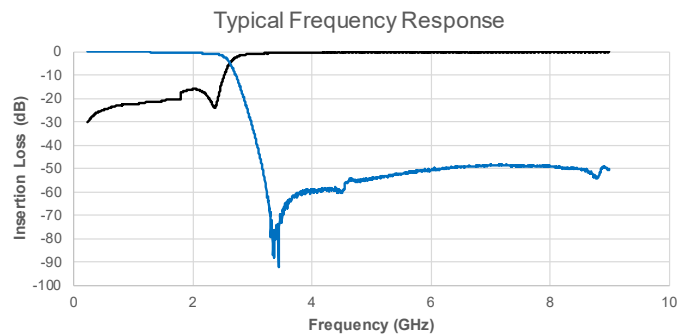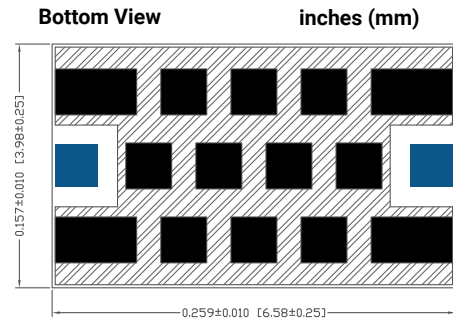

### LP0AA2490A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 2.490 GHz	1.2 dB	Max
	DC - 2.490 GHz	0.7 dB	Typ
	3dB Cutoff	2.80 GHz	Typ
<b>Rejection</b>	3.98 - 9.00 GHz	30dB	Min
	3.79 - 5.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

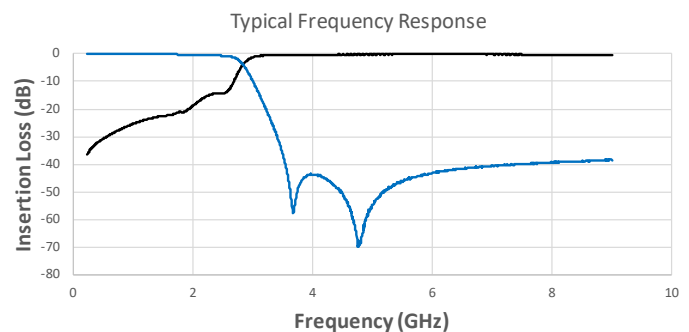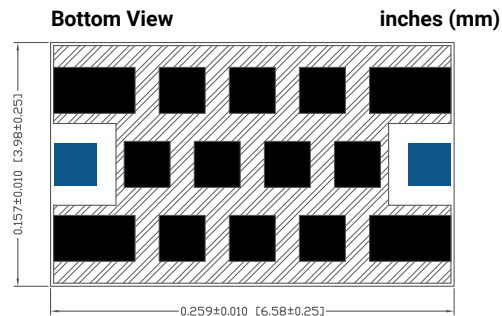

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP2EA2530A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 2.530 GHz	1.2 dB	Max
	DC - 2.530 GHz	0.7 dB	Typ
	3dB Cutoff	2.87 GHz	Typ
<b>Rejection</b>	3.28 - 9.00 GHz	30dB	Min
	3.32 - 6.50 GHz	40dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE 2E

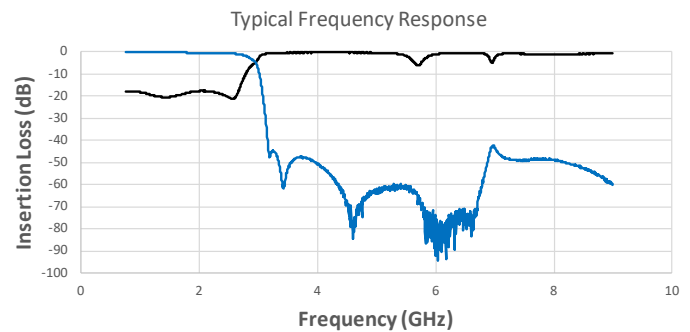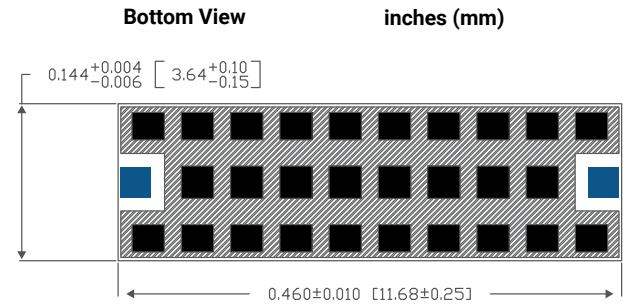

### LP0AA2590A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 2.590 GHz	1.2 dB	Max
	DC - 2.590 GHz	0.7 dB	Typ
	3dB Cutoff	2.89 GHz	Typ
<b>Rejection</b>	3.71 - 9.00 GHz	30dB	Min
	3.87 - 5.20 GHz	40dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

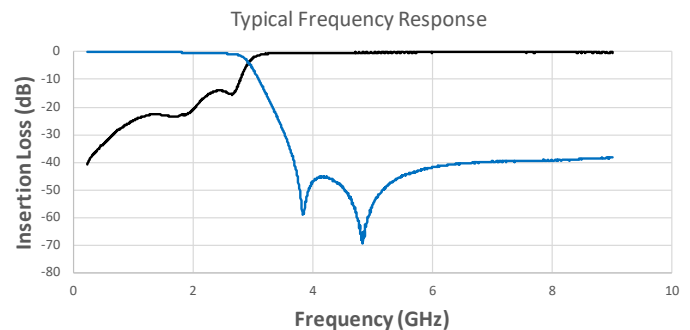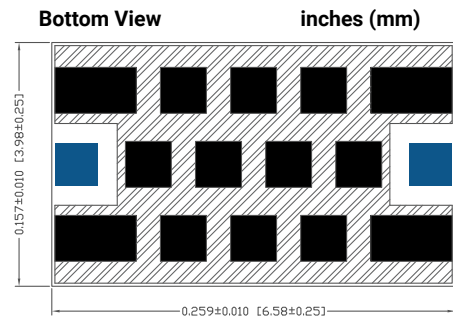

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP2EA2600A7\*\*

#### ELECTRICAL SPECIFICATIONS

Pass Band	DC - 2.600 GHz	1.2 dB	Max
	DC - 2.600 GHz	0.7 dB	Typ
	3dB Cutoff	2.95 GHz	Typ
Rejection	3.40 - 9.00 GHz	30dB	Min
	3.50 - 6.00 GHz	40dB	Min
Dimension	Thickness	40 Mils	Max
RF Power	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE 2E

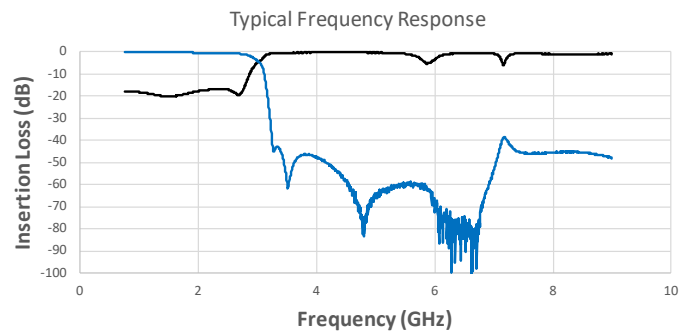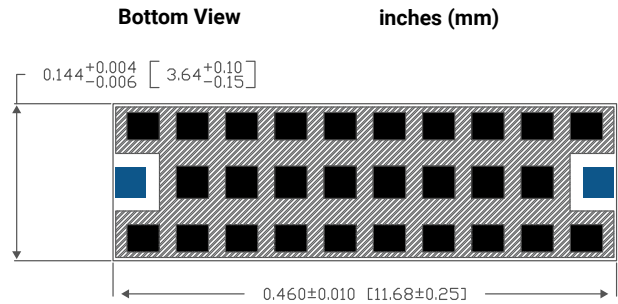

### LP0AA2640A7\*\*

#### ELECTRICAL SPECIFICATIONS

Pass Band	DC - 2.640 GHz	1.2 dB	Max
	DC - 2.640 GHz	0.8 dB	Typ
	3dB Cutoff	2.97 GHz	Typ
Rejection	3.82 - 9.00 GHz	30dB	Min
	3.98 - 5.50 GHz	40dB	Min
Dimension	Thickness	40 Mils	Max
RF Power	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

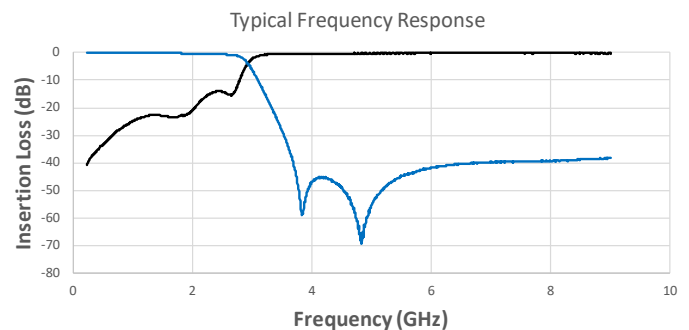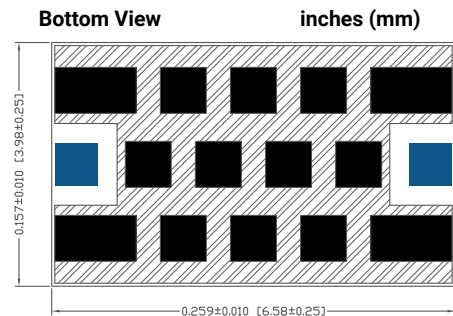

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0AA2910A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 2.910 GHz	1.2 dB	Max
	DC - 2.910 GHz	0.8 dB	Typ
	3dB Cutoff	3.43 GHz	Typ
<b>Rejection</b>	4.07 - 9.00 GHz	30dB	Min
	4.80 - 8.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

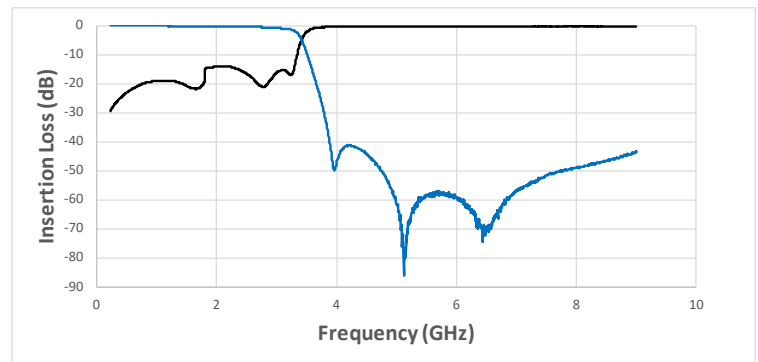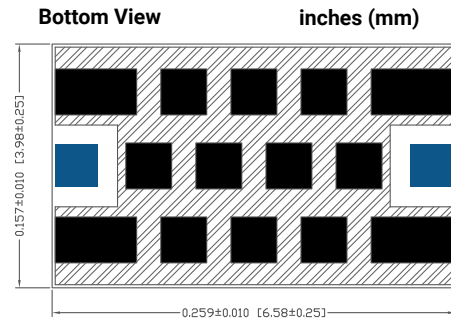

### LP0AA2980A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 2.980 GHz	1.2 dB	Max
	DC - 2.980 GHz	0.7 dB	Typ
	3dB Cutoff	3.52 GHz	Typ
<b>Rejection</b>	4.17 - 9.00 GHz	30dB	Min
	4.29 - 8.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

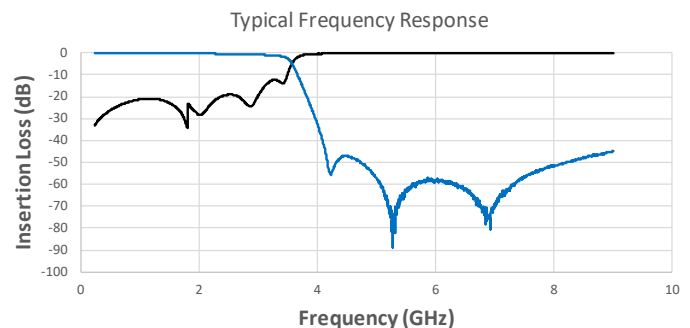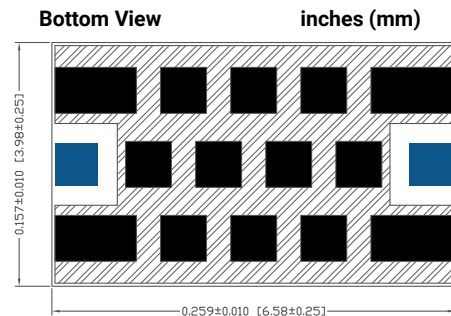

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0AA3100A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 3.100 GHz	1.2 dB	Max
	DC - 3.100 GHz	0.7 dB	Typ
	3dB Cutoff	3.65 GHz	Typ
<b>Rejection</b>	4.32 - 9.00 GHz	30dB	Min
	5.00 - 8.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

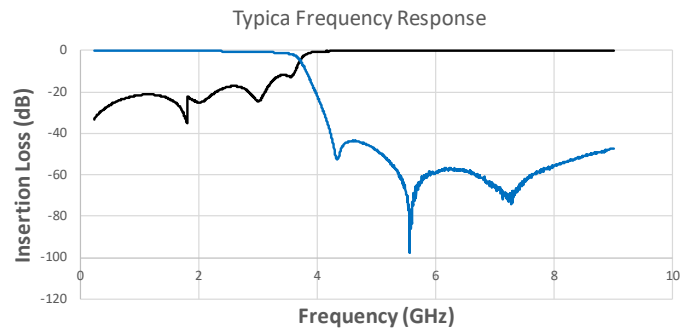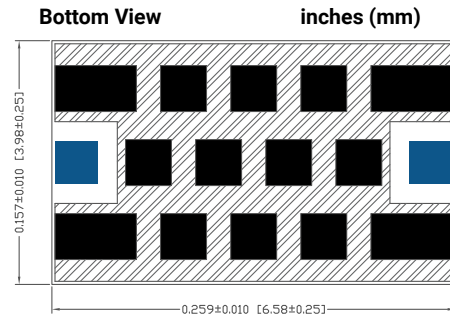

### LP0AA3160A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 3.160 GHz	1.2 dB	Max
	DC - 3.160 GHz	0.8 dB	Typ
	3dB Cutoff	3.47 GHz	Typ
<b>Rejection</b>	4.36 - 9.00 GHz	30dB	Min
	4.47 - 9.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

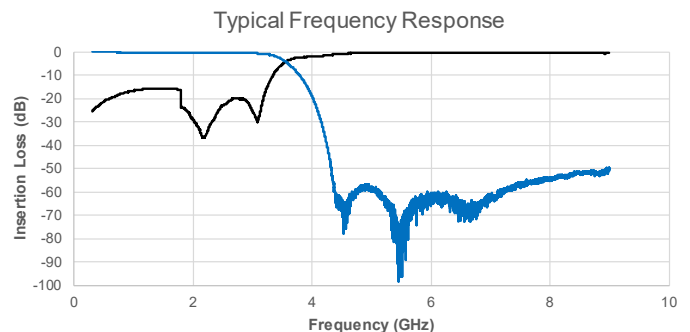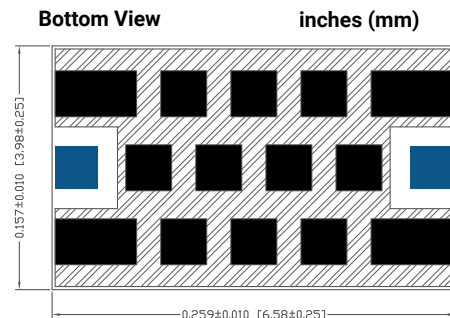

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0AA4080A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 4.080 GHz	1.2 dB	Max
	DC - 4.080 GHz	0.7 dB	Typ
	3dB Cutoff	5.03 GHz	Typ
<b>Rejection</b>	5.62 - 9.00 GHz	30dB	Min
	5.69 - 9.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

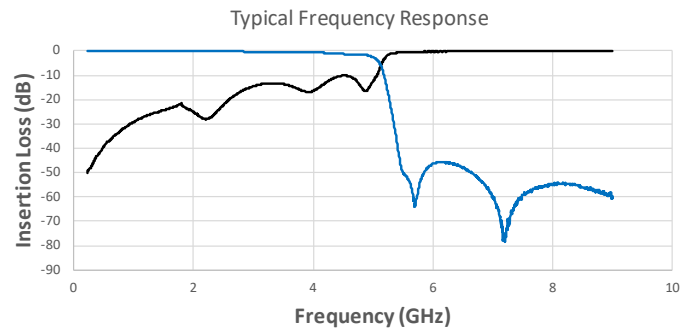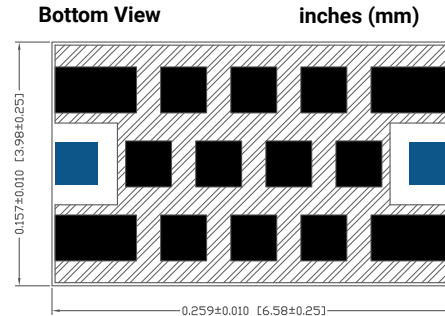

### LP0AA4150A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 4.150 GHz	1.2 dB	Max
	DC - 4.150 GHz	0.6 dB	Typ
	3dB Cutoff	5.16 GHz	Typ
<b>Rejection</b>	5.75 - 9.00 GHz	30dB	Min
	5.82 - 9.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

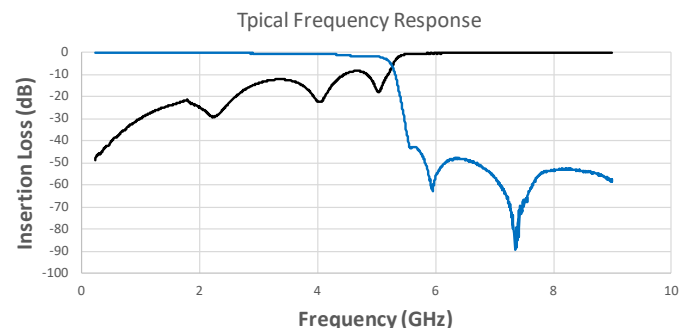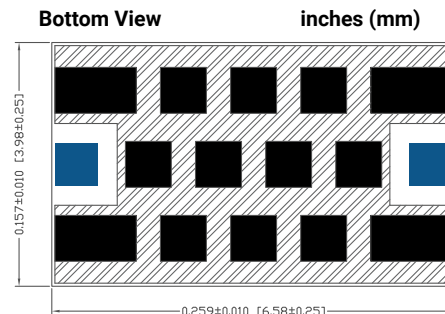

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0AA4210A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 4.210 GHz	1.2 dB	Max
	DC - 4.210 GHz	0.7 dB	Typ
	3dB Cutoff	5.28 GHz	Typ
<b>Rejection</b>	5.87 - 9.00 GHz	30dB	Min
	6.16 - 9.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

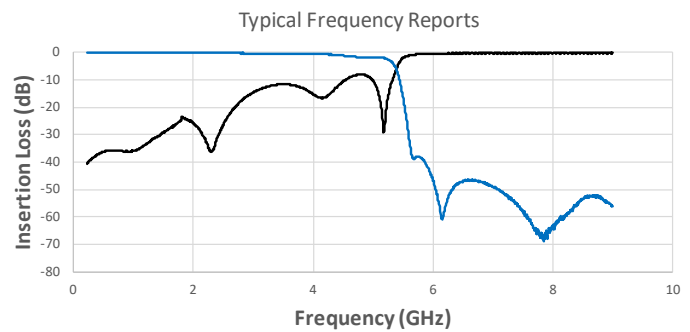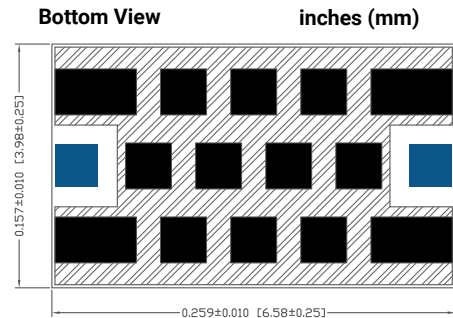

### LP0AA4370A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 4.370 GHz	1.2 dB	Max
	DC - 7.370 GHz	0.8 dB	Typ
	3dB Cutoff	4.84 GHz	Typ
<b>Rejection</b>	6.00 - 9.00 GHz	30dB	Min
	6.32 - 9.00 GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

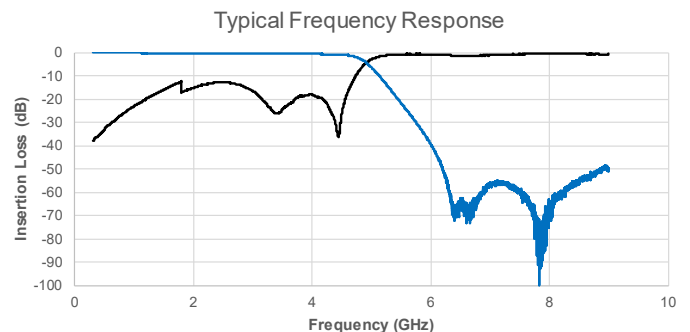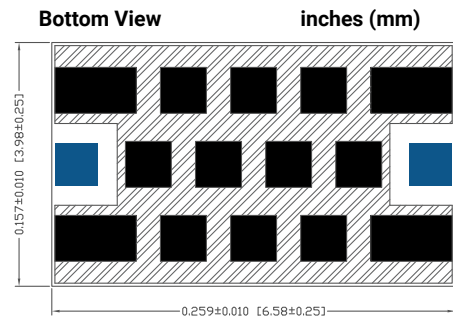

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0AA6160A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 6.160 GHz	1.2 dB	Max
	DC - 6.160 GHz	0.9 dB	Typ
	3dB Cutoff	7.09 GHz	Typ
<b>Rejection</b>	8.59 - 13.00 GHz	30dB	Min
	8.82 - 11.50 GHz	40dB	Min
<b>Dimension</b>	Thickness	22 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

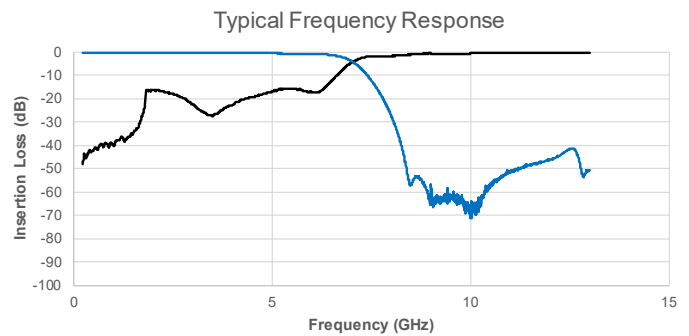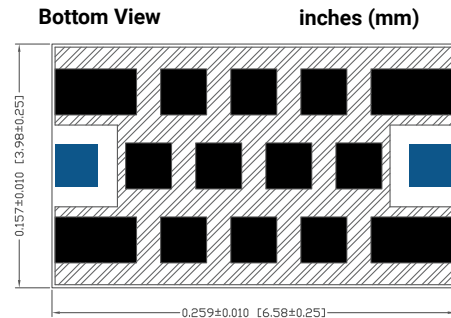

### LP0FA0054A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.054 GHz	1.2 dB	Max
	DC - 0.054 GHz	0.9 dB	Typ
	-3dB Cutoff	0.071 GHz	Typ
<b>Rejection</b>	0.083 - 0.7 GHz	30 dB	Min
	N/A	40 dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE F

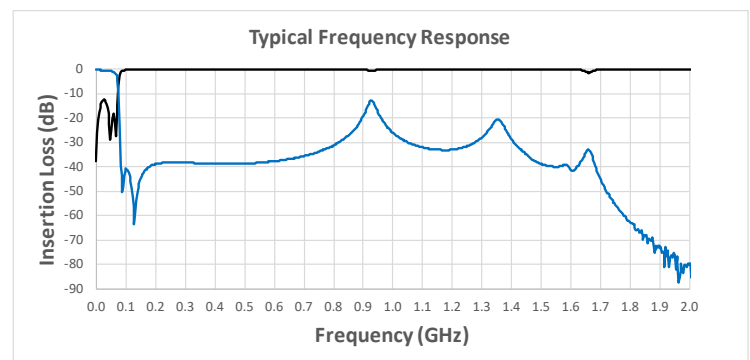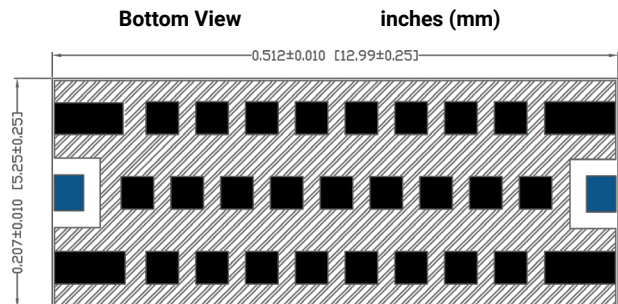

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0FA0056A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.057 GHz	1.2 dB	Max
	DC - 0.057 GHz	0.9 dB	Typ
	-3dB Cutoff	0.072 GHz	Typ
<b>Rejection</b>	0.089 - 0.7 GHz	30 dB	Min
	N/A	40 dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE F

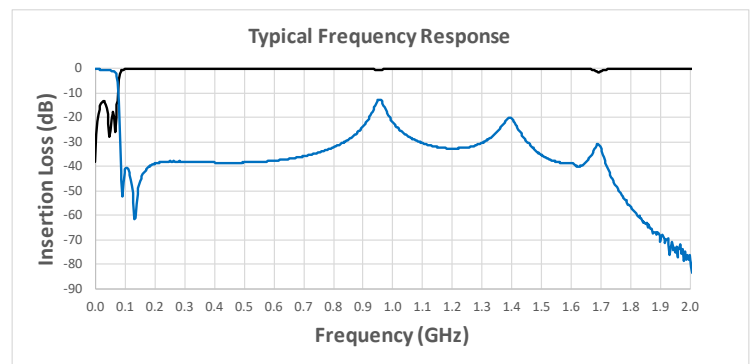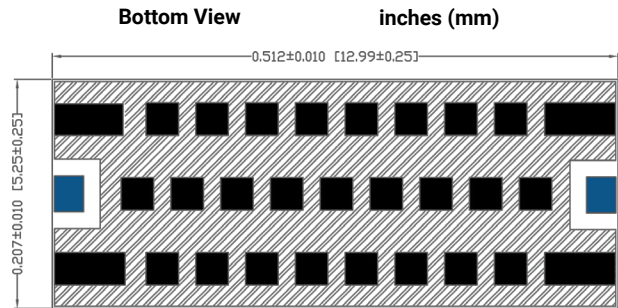

### LP0FA0057A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.057 GHz	1.2 dB	Max
	DC - 0.057 GHz	0.9 dB	Typ
	-3dB Cutoff	0.073 GHz	Typ
<b>Rejection</b>	0.09 - 0.7 GHz	30 dB	Min
	N/A	40 dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE F

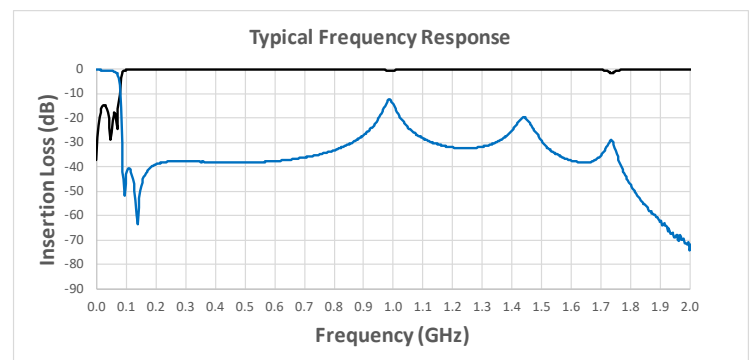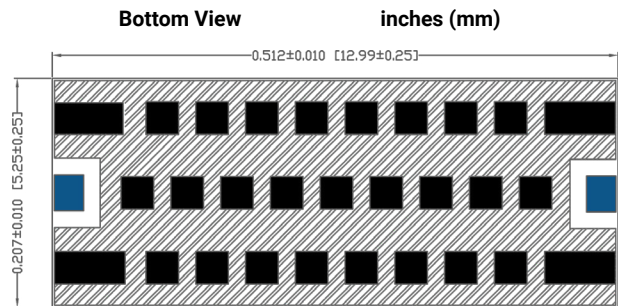

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0EA0076A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.076 GHz	1.2 dB	Max
	DC - 0.076 GHz	0.9 dB	Typ
	-3dB Cutoff	0.096 GHz	Typ
<b>Rejection</b>	0.115 - 0.8 GHz	30 dB	Min
	N/A	40 dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE E

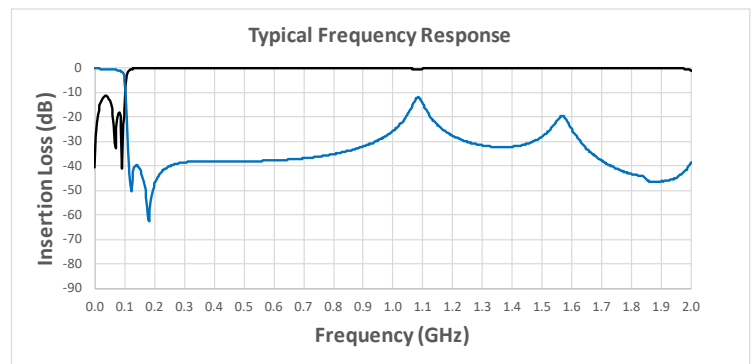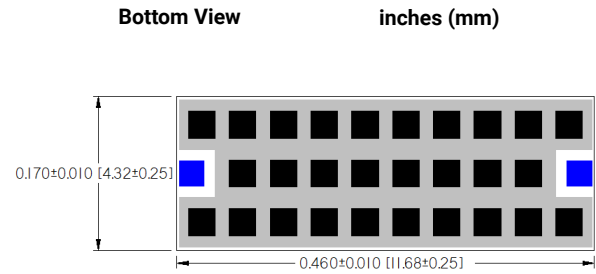

### LP0EA0080A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.08 GHz	1.2 dB	Max
	DC - 0.08 GHz	0.9 dB	Typ
	-3dB Cutoff	0.102 GHz	Typ
<b>Rejection</b>	0.121 - 0.8 GHz	30 dB	Min
	N/A	40 dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE E

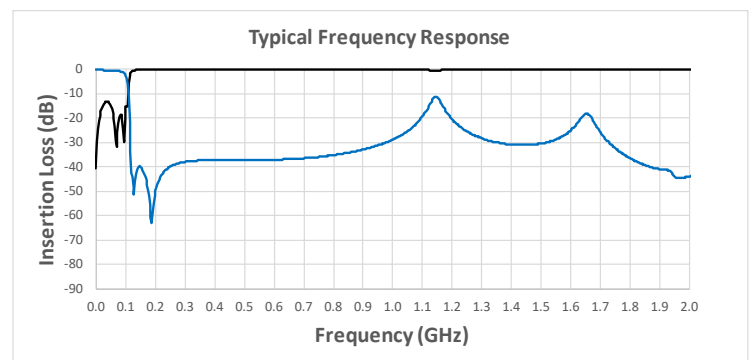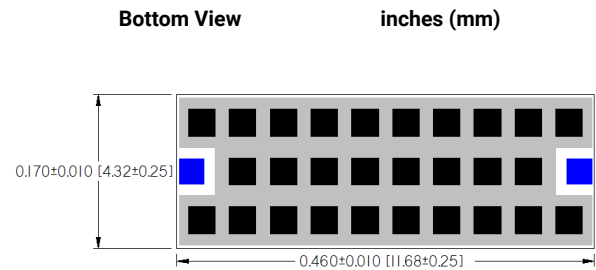

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0EA0082A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.082 GHz	1.2 dB	Max
	DC - 0.082 GHz	0.8 dB	Typ
	-3dB Cutoff	0.105 GHz	Typ
<b>Rejection</b>	0.125 - 0.8 GHz	30 dB	Min
	N/A	40 dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE E

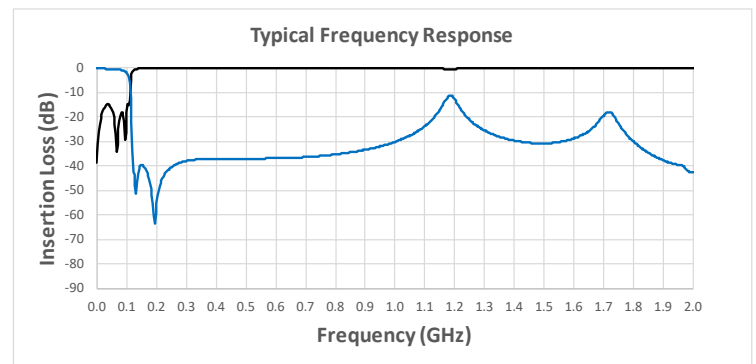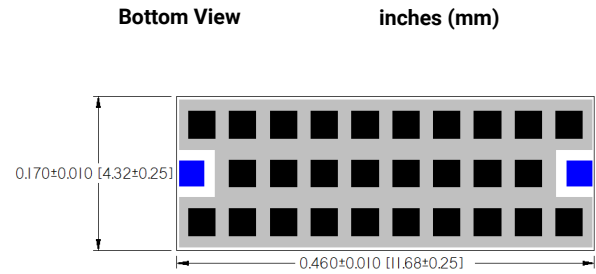

### LP0DA0102A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.102 GHz	1.2 dB	Max
	DC - 0.102 GHz	0.9 dB	Typ
	-3dB Cutoff	0.132 GHz	Typ
<b>Rejection</b>	0.155 - 0.9 GHz	30 dB	Min
	N/A	40 dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE D

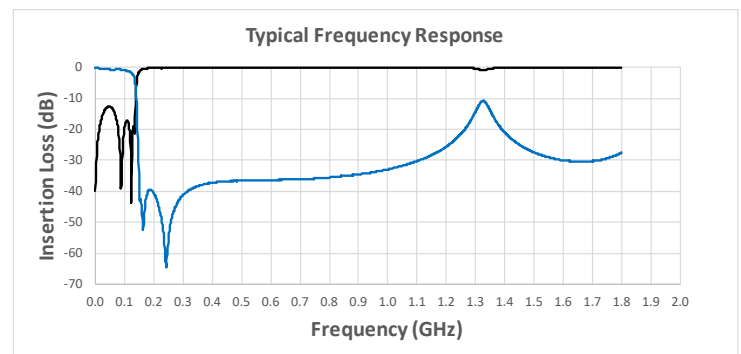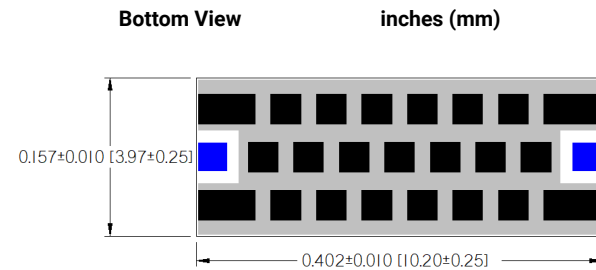

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0DA0107A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.107 GHz	1.2 dB	Max
	DC - 0.107 GHz	0.9 dB	Typ
	-3dB Cutoff	0.136 GHz	Typ
<b>Rejection</b>	0.16 - 0.9 GHz	30 dB	Min
	N/A	40 dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE D

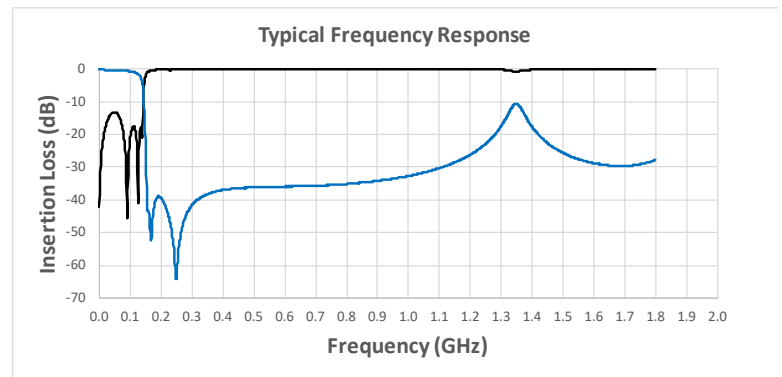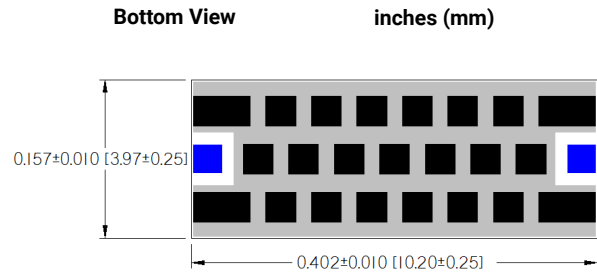

### LP0DA0112A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.112 GHz	1.2 dB	Max
	DC - 0.112 GHz	0.9 dB	Typ
	-3dB Cutoff	0.143 GHz	Typ
<b>Rejection</b>	0.167 - 0.9 GHz	30 dB	Min
	N/A	40 dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE D

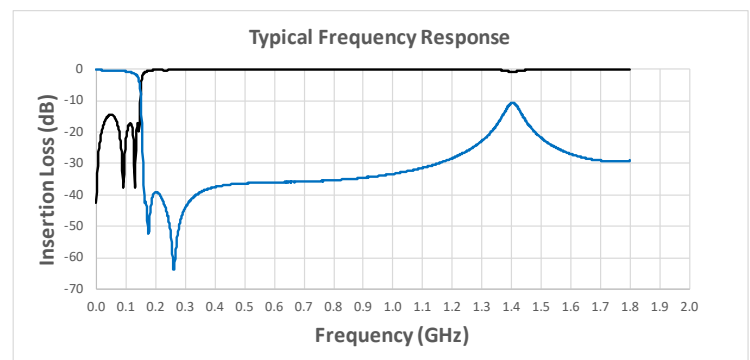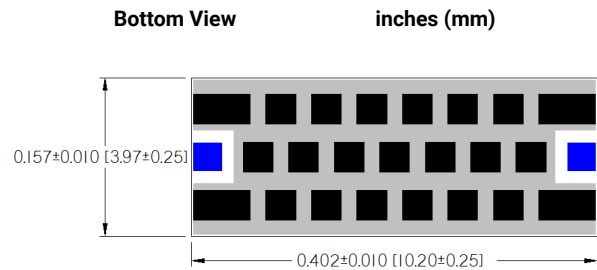

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0AA0141A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.141 GHz	1.2 dB	Max
	DC - 0.141 GHz	0.8 dB	Typ
	-3dB Cutoff	0.172 GHz	Typ
<b>Rejection</b>	0.212 - 2 GHz	30 dB	Min
	N/A	40 dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

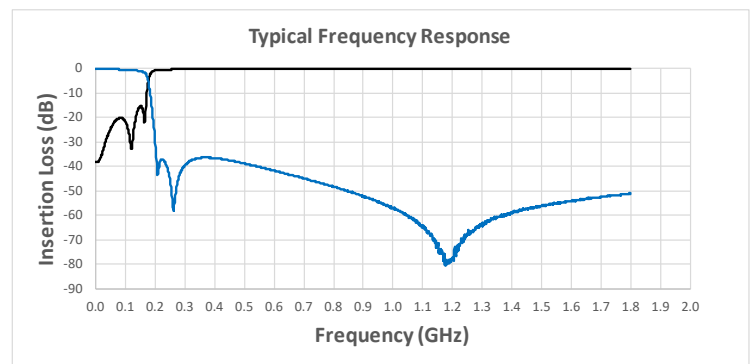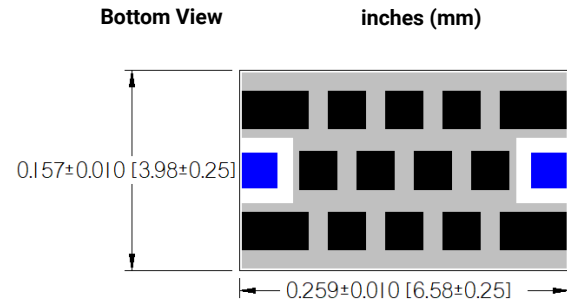

### LP0AA0145A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.145 GHz	1.2 dB	Max
	DC - 0.145 GHz	0.9 dB	Typ
	-3dB Cutoff	0.174 GHz	Typ
<b>Rejection</b>	0.224 - 2 GHz	30 dB	Min
	N/A	40 dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

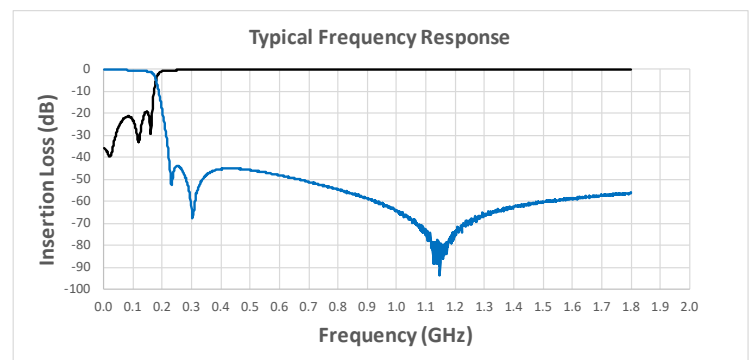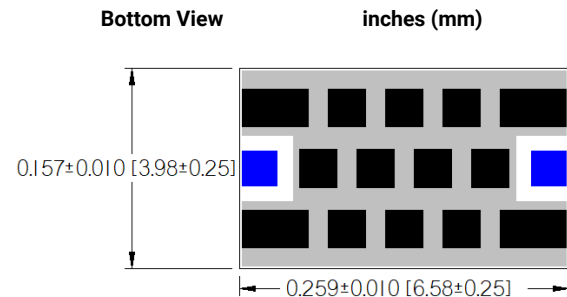

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0AA0149A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.149 GHz	1.2 dB	Max
	DC - 0.149 GHz	0.8 dB	Typ
	-3dB Cutoff	0.182 GHz	Typ
<b>Rejection</b>	0.224 - 2 GHz	30 dB	Min
	N/A	40 dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

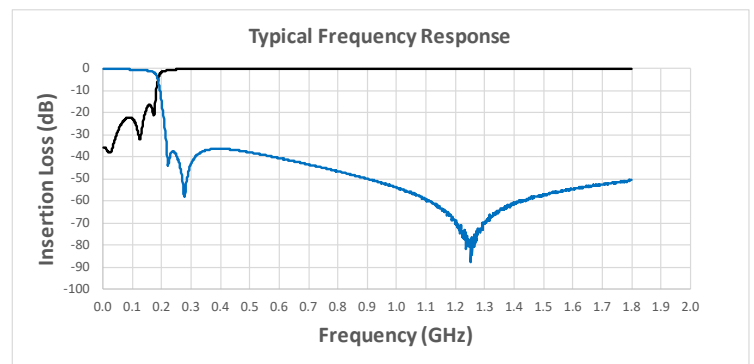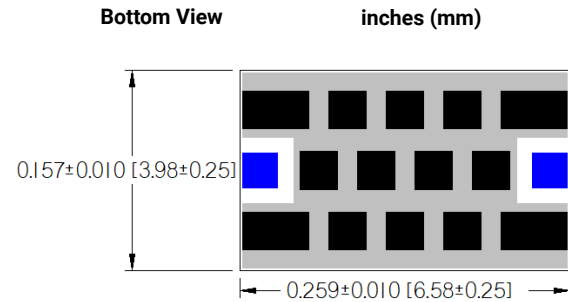

### LP0AA0153A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.153 GHz	1.2 dB	Max
	DC - 0.153 GHz	0.8 dB	Typ
	-3dB Cutoff	0.189 GHz	Typ
<b>Rejection</b>	0.231 - 2 GHz	30 dB	Min
	N/A	40 dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

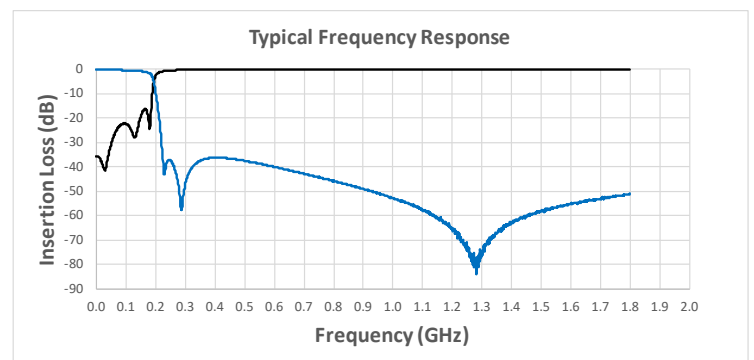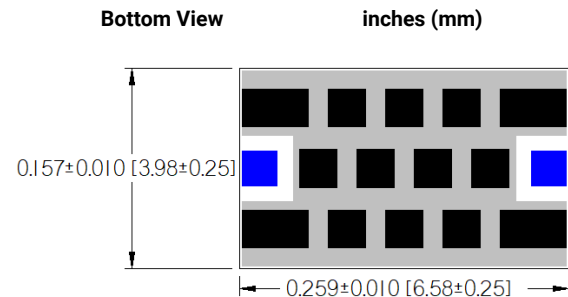

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0AA0156A7\*\*

#### ELECTRICAL SPECIFICATIONS

Pass Band	DC - 0.156 GHz	1.2 dB	Max
	DC - 0.156 GHz	0.8 dB	Typ
	-3dB Cutoff	0.192 GHz	Typ
Rejection	0.236 - 2 GHz	30 dB	Min
	N/A	40 dB	Min
Dimension	Thickness	40 Mils	Max
RF Power	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

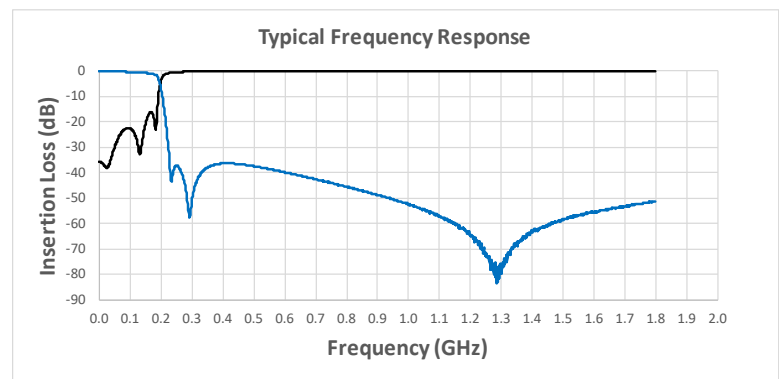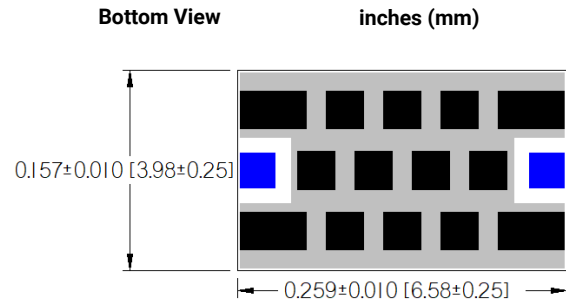

### LP0AA0161A7\*\*

#### ELECTRICAL SPECIFICATIONS

Pass Band	DC - 0.161 GHz	1.2 dB	Max
	DC - 0.161 GHz	0.8 dB	Typ
	-3dB Cutoff	0.197 GHz	Typ
Rejection	0.241 - 2 GHz	30 dB	Min
	N/A	40 dB	Min
Dimension	Thickness	40 Mils	Max
RF Power	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

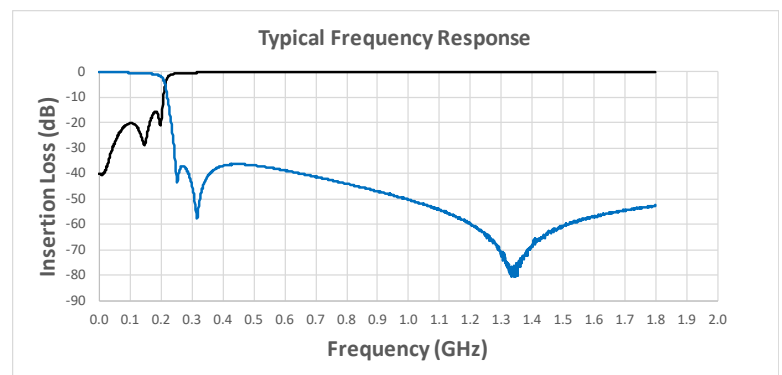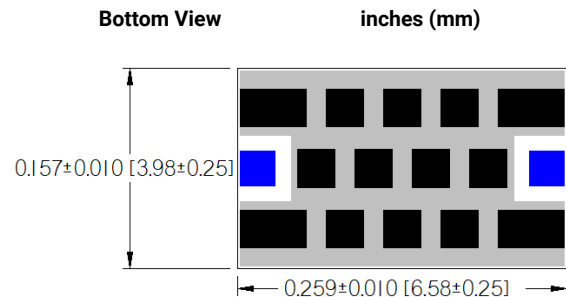

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0AA0171A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.171 GHz	1.2 dB	Max
	DC - 0.171 GHz	0.8 dB	Typ
	-3dB Cutoff	0.207 GHz	Typ
<b>Rejection</b>	0.255 - 2 GHz	30 dB	Min
	N/A	40 dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

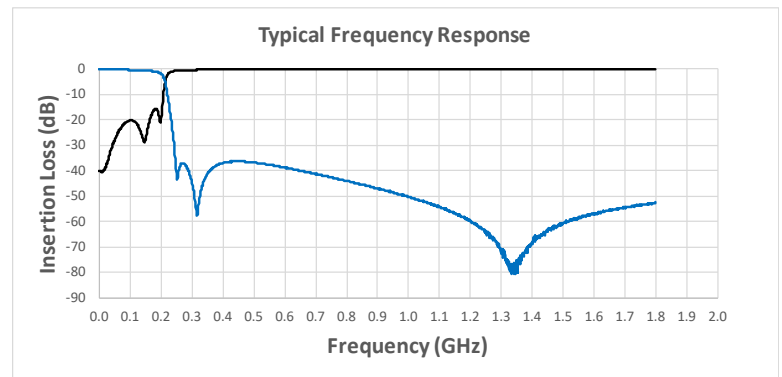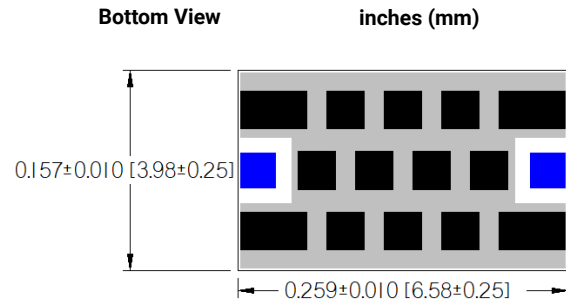

### LP0AA0174A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.174 GHz	1.2 dB	Max
	DC - 0.174 GHz	0.8 dB	Typ
	-3dB Cutoff	0.212 GHz	Typ
<b>Rejection</b>	0.26 - 2 GHz	30 dB	Min
	N/A	40 dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

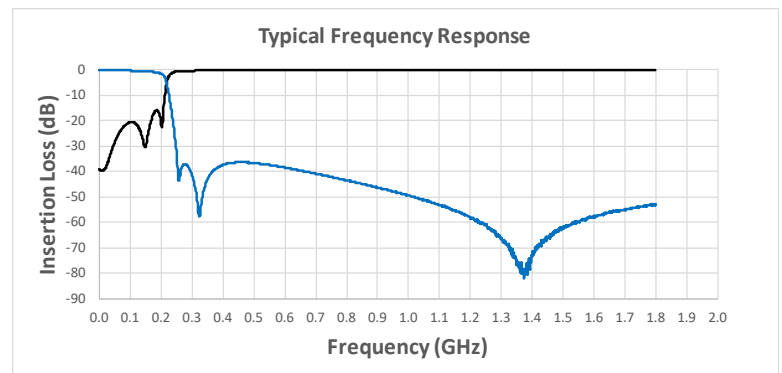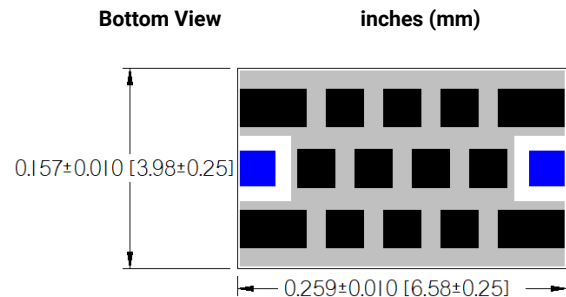

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0AA0185A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.185 GHz	1.2 dB	Max
	DC - 0.185 GHz	0.8 dB	Typ
	-3dB Cutoff	0.22 GHz	Typ
<b>Rejection</b>	0.27 - 2 GHz	30 dB	Min
	N/A	40 dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

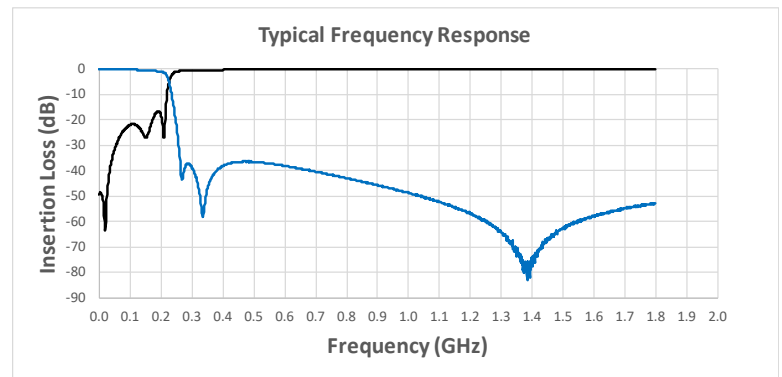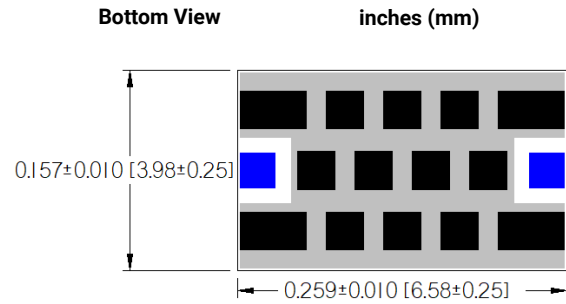

### LP0AA0194A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.194 GHz	1.2 dB	Max
	DC - 0.194 GHz	0.8 dB	Typ
	-3dB Cutoff	0.241 GHz	Typ
<b>Rejection</b>	0.289 - 2 GHz	30 dB	Min
	N/A	40 dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

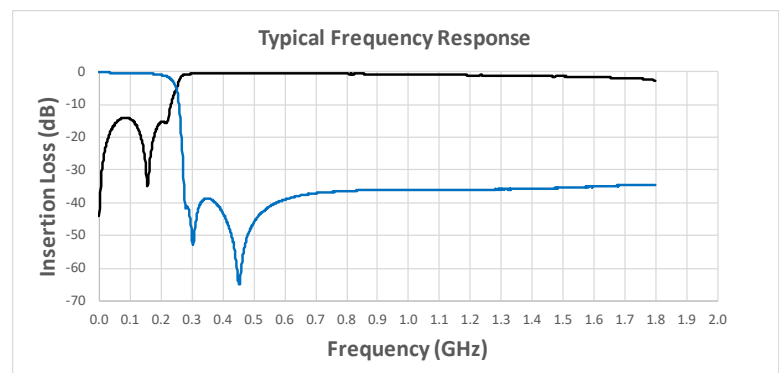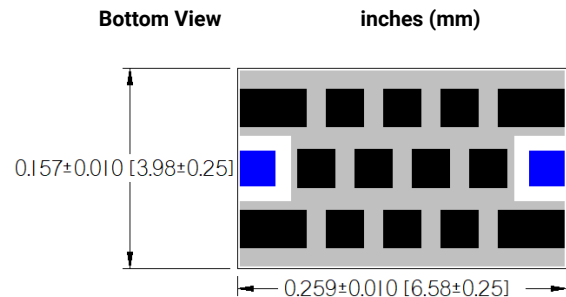

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0AA0204A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.204 GHz	1.2 dB	Max
	DC - 0.204 GHz	0.8 dB	Typ
	-3dB Cutoff	0.245 GHz	Typ
<b>Rejection</b>	0.293 - 2 GHz	30 dB	Min
	N/A	40 dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

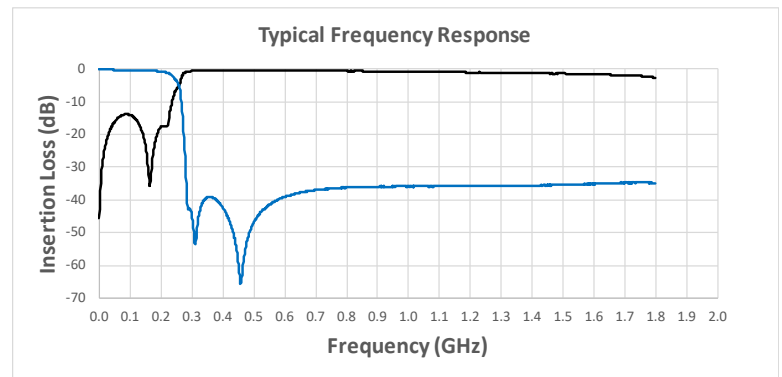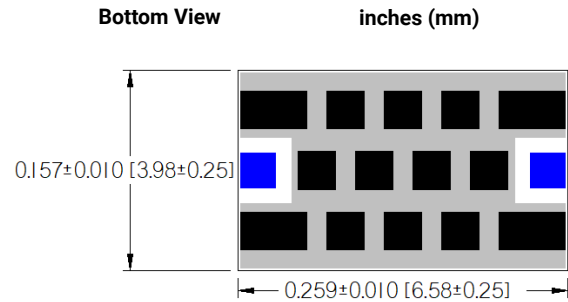

### LP0AA0209A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.209 GHz	1.2 dB	Max
	DC - 0.209 GHz	0.8 dB	Typ
	-3dB Cutoff	0.252 GHz	Typ
<b>Rejection</b>	0.303 - 2 GHz	30 dB	Min
	N/A	40 dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

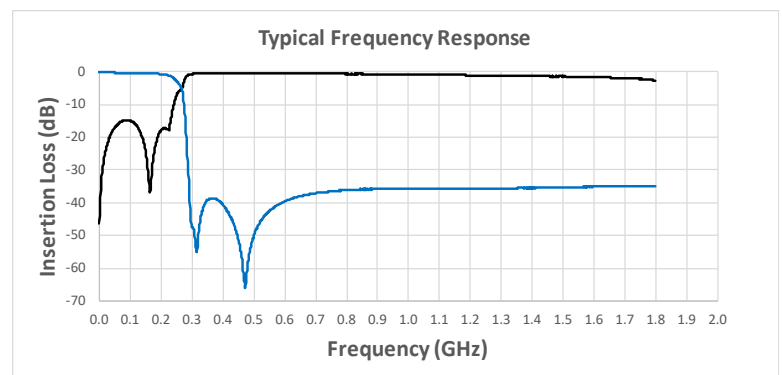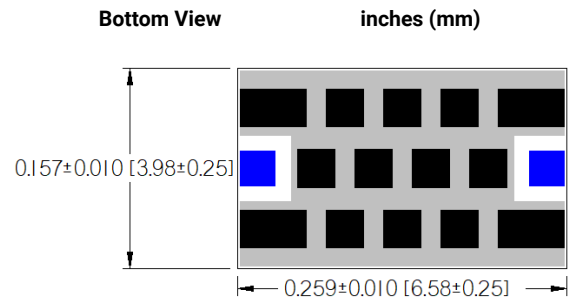

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0AA0279A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.279 GHz	1.2 dB	Max
	DC - 0.279 GHz	0.8 dB	Typ
	-3dB Cutoff	0.339 GHz	Typ
<b>Rejection</b>	0.398 - 2 GHz	30 dB	Min
	N/A	40 dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

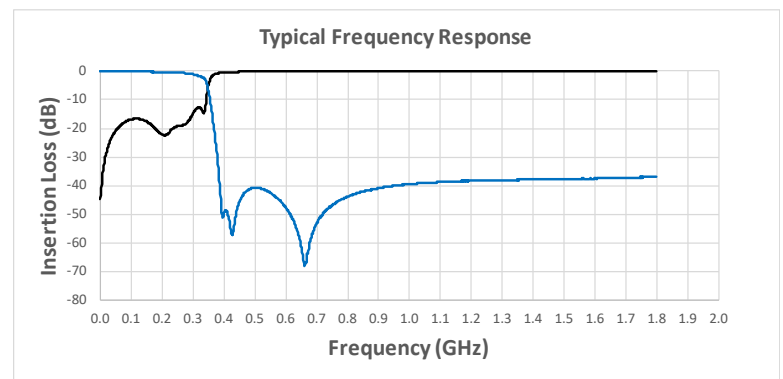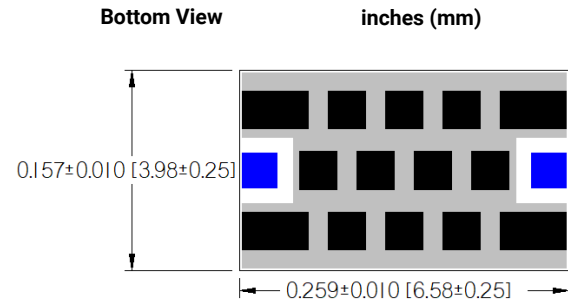

### LP0AA0290A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.29 GHz	1.2 dB	Max
	DC - 0.29 GHz	0.8 dB	Typ
	-3dB Cutoff	0.351 GHz	Typ
<b>Rejection</b>	0.415 - 2 GHz	30 dB	Min
	N/A	40 dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

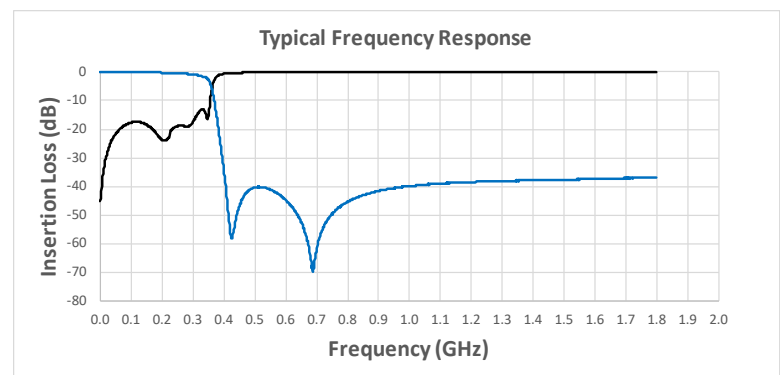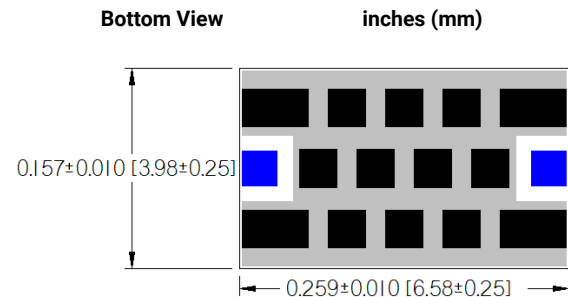

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0AA0299A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.299 GHz	1.2 dB	Max
	DC - 0.299 GHz	0.8 dB	Typ
	-3dB Cutoff	0.363 GHz	Typ
<b>Rejection</b>	0.427 - 2 GHz	30 dB	Min
	N/A	40 dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

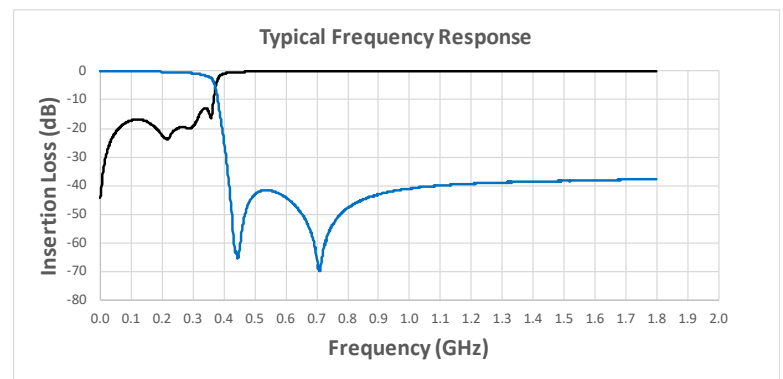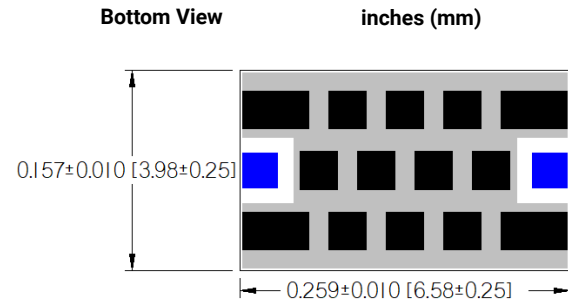

### LP0AA0316A7\*\*

#### ELECTRICAL SPECIFICATIONS

<b>Pass Band</b>	DC - 0.316 GHz	1.2 dB	Max
	DC - 0.316 GHz	0.8 dB	Typ
	-3dB Cutoff	0.378 GHz	Typ
<b>Rejection</b>	0.446 - 2 GHz	30 dB	Min
	N/A	40 dB	Min
<b>Dimension</b>	Thickness	40 Mils	Max
<b>RF Power</b>	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD  
DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

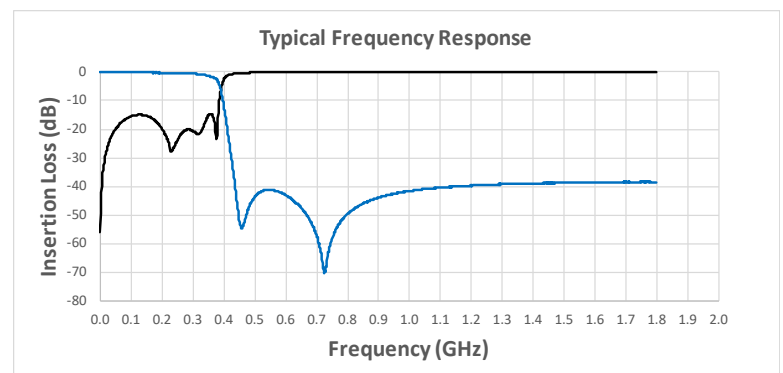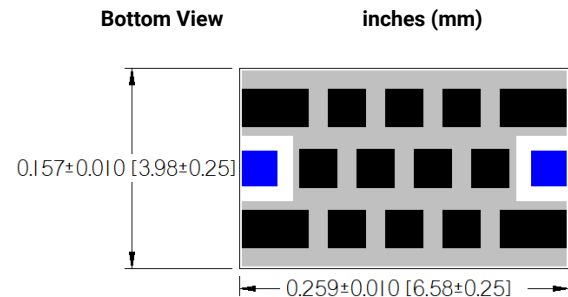

# Multilayer Organic (MLO®) Filters

## MLO® Low Pass Filters

### LP0AA0322A7\*\*

#### ELECTRICAL SPECIFICATIONS

Pass Band	DC - 0.322 GHz	1.2 dB	Max
	DC - 0.322 GHz	0.8 dB	Typ
	-3dB Cutoff	0.386 GHz	Typ
Rejection	0.454 - 2 GHz	30 dB	Min
	N/A	40 dB	Min
Dimension	Thickness	40 Mils	Max
RF Power	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

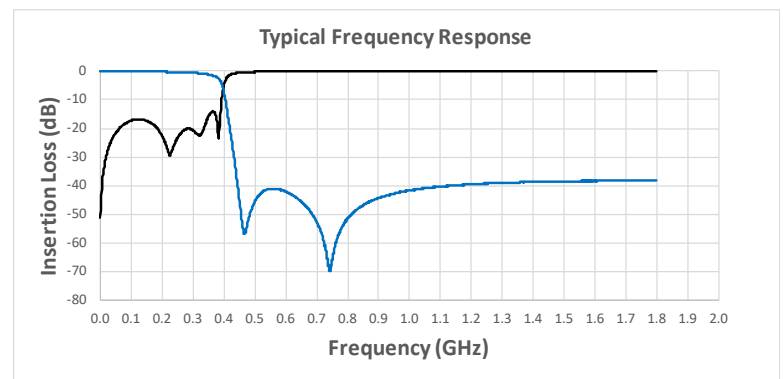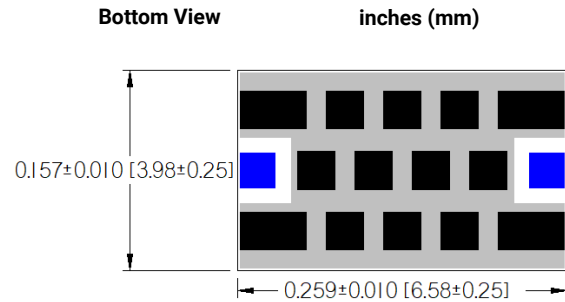

### LP0AA0327A7\*\*

#### ELECTRICAL SPECIFICATIONS

Pass Band	DC - 0.327 GHz	1.2 dB	Max
	DC - 0.327 GHz	0.8 dB	Typ
	-3dB Cutoff	0.392 GHz	Typ
Rejection	0.462 - 2 GHz	30 dB	Min
	N/A	40 dB	Min
Dimension	Thickness	40 Mils	Max
RF Power	Power	4 Watts	Max



[Click here to return to main table.](#)



**CLICK HERE TO DOWNLOAD DATA FILES**

\*Data files contain DXF and S2P files

#### DIMENSIONS – CASE SIZE A

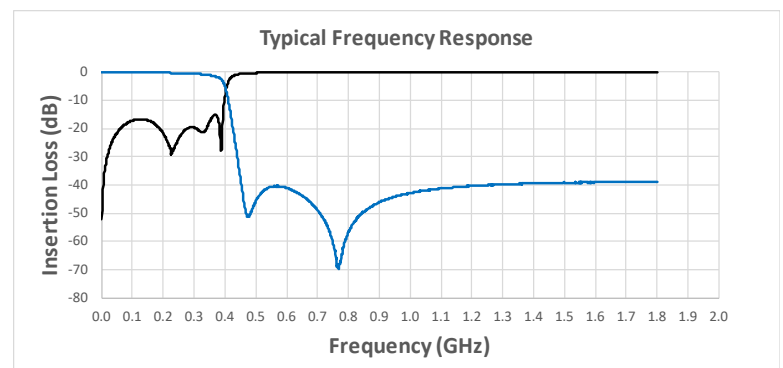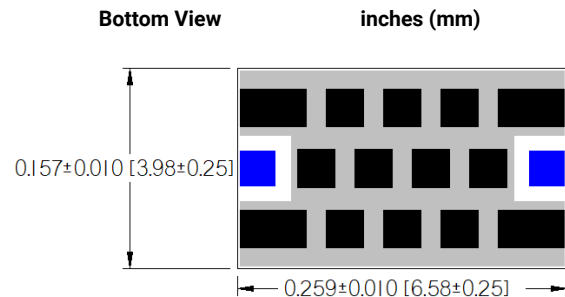

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Signal Conditioning category](#):*

*Click to view products by [Kyocera AVX manufacturer](#):*

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#) [1P510S](#) [FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#) [C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#) [PD0922J5050D2HF](#) [1E1305-3](#) [1F1304-3S](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-103-PIN](#)