

Eccosorb® HR

Lightweight, Open-cell, Broadband Microwave Absorber



LIGHTWEIGHT BROADBAND FOAM ABSORBER

Eccosorb HR is a lightweight, flexible, flat-sheet, broadband absorber based on a reticulated (open-cell) polyurethane foam material impregnated with carbon black dispersions with controlled conductivity. Automated impregnation methods are used in order to obtain a gradient loading of the absorber.

FEATURES AND BENEFITS

- Lightweight
- Open-cell
- Different thicknesses, different frequencies
- High free space reflectivity performance

MARKETS

- Commercial Telecom
- Parabolic Antennas
- Security and Defense
- Test and Measurement

SPECIFICATIONS

TYPICAL PROPERTIES	ECCOSORB HR
Frequency Range (GHz)	5 to 90
Max. Service Temperature °C (°F)	90 (194)
Density kg/m³ (lb/ft³)	45 (2.8)
Tensile Strength (kPA)	70
Elongation (%)	170

Data for design engineer guidance only. Observed performance varies in application. Engineers are reminded to test the material in application.

APPLICATIONS

- Lining of antenna shrouds for low side-lobe reflector antennas.
- Decoupling of adjacent antennas and array elements.
- Camouflaging and interference suppression applications.
- Masking of reflecting structures i.e. masts in anechoic chambers.

AVAILABILITY

- Standard sheets are 610mm x 610mm (24"x24").
- The material is available in 3 standard thicknesses:
 Eccosorb HR-10 nominal thickness 10mm
 Eccosorb HR-15 nominal thickness 15mm

Eccosorb HR-25 - nominal thickness 25mm

• Other sizes and customer specified configurations can be delivered upon request.


Americas: +1.866.928.8181 Europe: +49.(0)8031.2460.0 Asia: +86.755.2714.1166




INSTRUCTIONS FOR USE

- As the material is a gradient loaded absorber, the back side of the absorber is marked and this side should be bonded to the surface. The front surface should face the incident electromagnetic energy for proper performance.
- For optimal performance, Eccosorb HR should be bonded to a metal surface. If a metal surface is not available, the absorber can be supplied with an aluminium foil backing (ML) designated as HR-XX-ML.
- Our specific Eccostock® foam adhesive is recommended to bond Eccosorb HR.

HR Reflectivity

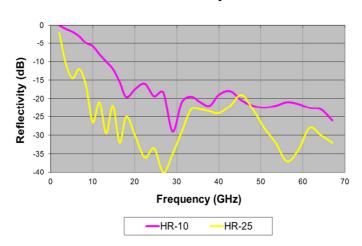

HR Reflectivity

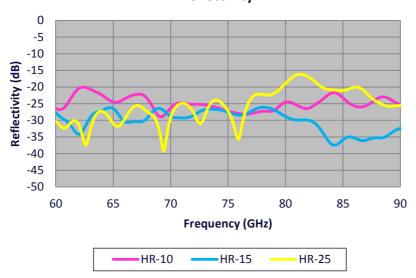

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for EMI Gaskets, Sheets, Absorbers & Shielding category:

Click to view products by Laird Performance Materials manufacturer:

Other Similar products are found below:

23-76FSC-SN-24 2-1616323-1 4-1616259-0 3013350A 46J8501020.NN00 3013310A 3013325A 3013308A 3020604 55005106 3021302 3031313 67SLH050050025PI00 3021310 0137131400 6-34UT-070-BD-16 303076048 46J5N03020.NN00 30206025 260737 30395641 3030403 3690103020 HNY-LT15CU4241 46X7503020.NN00 46X7501020.NN00 46W5E02520.NN00 46W5E01520.NN00 302095032 30207032 30210005 46J5N02520.NN00 3021213 3020804 3021004 74273711 74273704 33403 3031210 3031008 3031004 3030903 30308055 303076016 303045018 303035015 3029564 3025602 3023502 3022303