
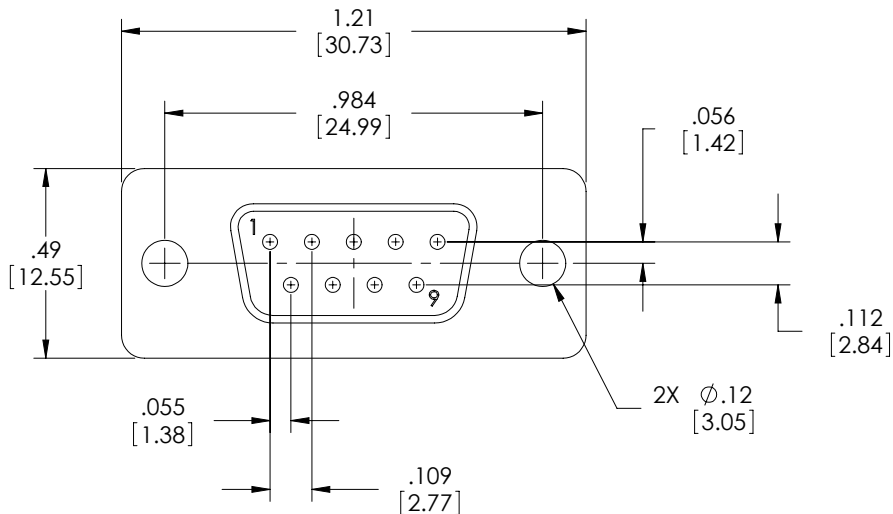


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE
WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	DRAWING REPLACES SD9P-PC-OD1	10/20/14	D. CASTRO

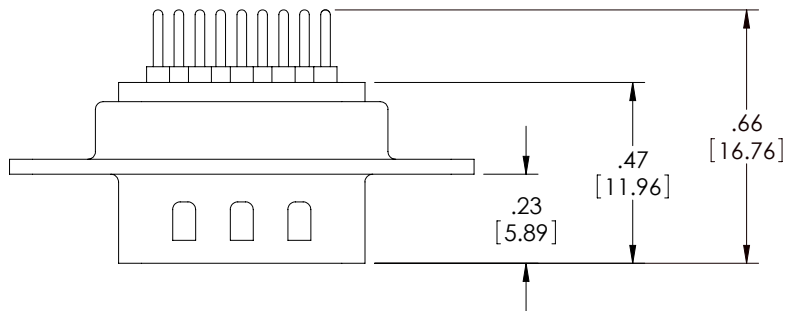

NOTES:

MATERIALS:

SHELL: COLD ROLLED STEEL
CONTACTS: BRASS
INSULATOR: THERMOPLASTIC PBT, UL94V-0

FINISH:

SHELL: TIN PLATED
CONTACT SURFACES: GOLD

ELECTRICAL:

CURRENT RATING: 5 AMP
DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC
INSULATION RESISTANCE: 1000 MΩ PER MINUTE @ 500 VDC
CONTACT RESISTANCE: 20mΩ MAX

MISCELLANEOUS:

OPERATING TEMPERATURE: -55°C ~ +105°C
ALL DIMENSIONS ARE FOR REFERENCE ONLY

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [13] PROJECTION 	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY B.MAZEJKA	12/18/2003		
	CHECKED BY C.McCORMICK	12/19/2003	CATEGORY D-SUBMINIATURE	
	APPROVED BY D.PARHAM	12/19/2003	PRODUCT DESCRIPTION CONNECTOR, DB9M PCB	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321	DWG. NO. SD9P-PC
COLOR VARIATIONS MAY OCCUR		SCALE: NONE	CAD FILE: SD9P-PC.SLDDRW	REV. A
		SHEET 1 OF 1		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Connectors](#) / [Coaxial Connectors](#) ***category:***

Click to view products by [L-Com](#) ***manufacturer:***

Other Similar products are found below :

[6002-7051-003](#) [6059674-1](#) [630059-000](#) [M55339/15-00491](#) [7002-1541-010](#) [7002-1572-002](#) [7003-1572-002](#) [7004-1512-000](#) [7009-1511-004](#)
[7105-1521-002](#) [7145-1521-002](#) [7203-1571-003](#) [7209-1511-011](#) [7405-1521-005](#) [7405-1521-019](#) [7405-1521-802](#) [755-74-5](#) [7706-2](#) [873183](#)
[PL375-33](#) [95-850-148-3](#) [R107003010W](#) [R112186000](#) [R113082097](#) [R113236000](#) [R113240097](#) [R114083000](#) [R114670000W](#) [R121053000](#)
[R124072220W](#) [R124076450](#) [R124175123](#) [R125075001](#) [R125414001](#) [R125415030](#) [R125415271](#) [R141007161](#) [R141574161W](#)
[R142004000W](#) [R142076000W](#) [R142076161W](#) [R142184000W](#) [R142676700](#) [R143012000](#) [R143075000W](#) [R143089117](#) [R143235161W](#)
[R143292700](#) [R143557000](#) [R161008000](#)