



8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/21/2016	DFRISIELLO
B	ECN 8696: ADD P/N'S -1,-3 AND -75	03/28/2017	SLI
C	ECN 9633: ADDED LENGTHS 15, 125, 150, 175, 200, 225, 250 FT	01/15/2019	DFRISIELLO
D	ECN 10151:CHANGED OPERATING TEMP RANGE: -40°C TO +60°C	10/10/19	DGUTTADAURO

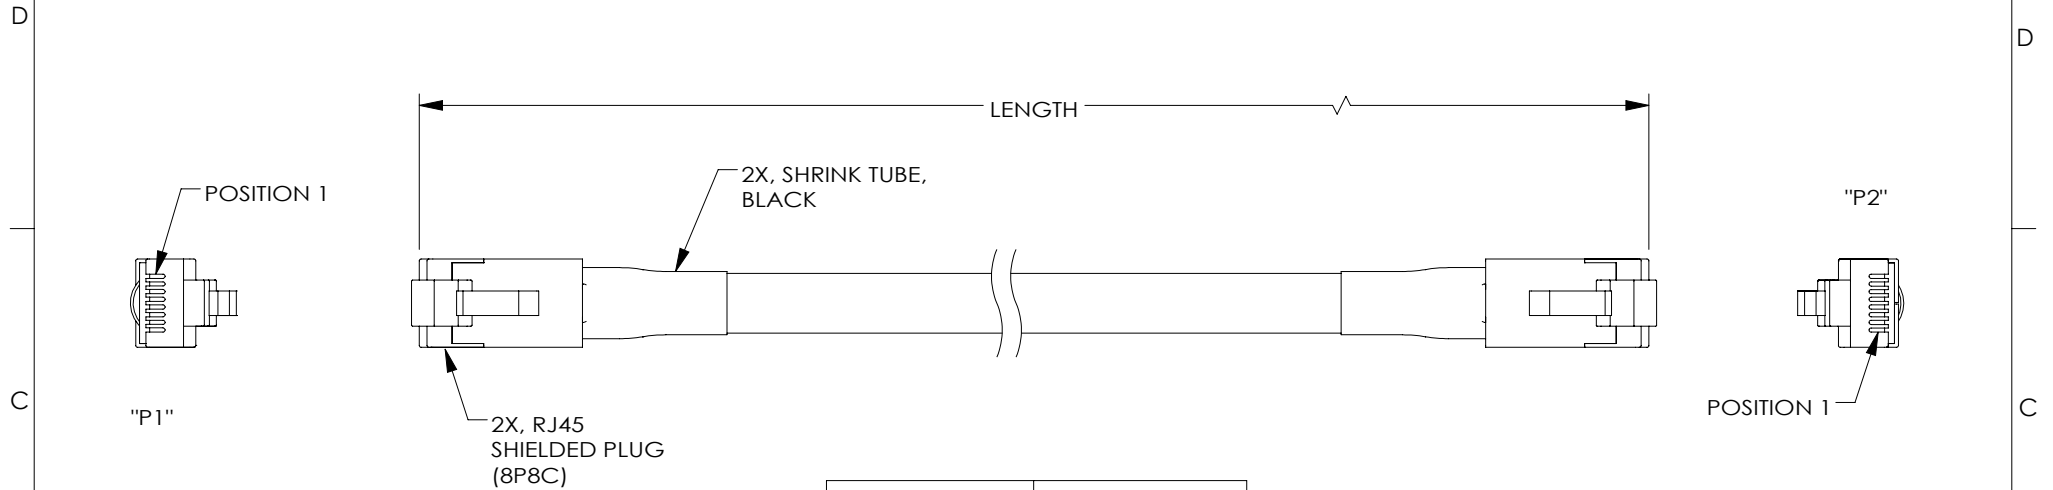

MODEL NUMBER	LENGTH	
	FEET	METERS
TRD695ODS-1	1.0	0.30
TRD695ODS-3	3.0	0.91
TRD695ODS-5	5.0	1.52
TRD695ODS-10	10.0	3.05
TRD695ODS-15	15.0	4.57
TRD695ODS-25	25.0	7.62
TRD695ODS-50	50.0	15.24
TRD695ODS-75	75.0	22.86
TRD695ODS-100	100.0	30.48
TRD695ODS-125	125.0	38.10
TRD695ODS-150	150.0	45.72
TRD695ODS-175	175.0	53.34
TRD695ODS-200	200.0	60.96
TRD695ODS-225	225.0	68.58
TRD695ODS-250	250.0	76.20

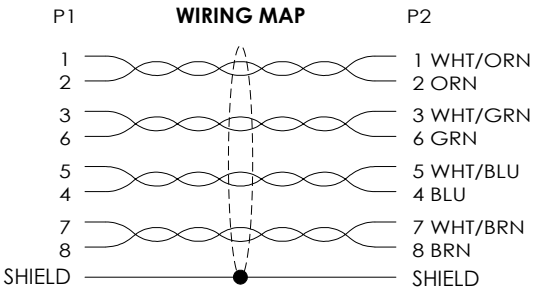

NOTES:

MATERIAL:

PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0
CONTACTS: PHOSPHOR BRONZE.
PLUG SHIELDING: BRASS
CABLE JACKET: LINEAR LOW-DENSITY POLYETHYLENE, BLACK, (LLDPE)

FINISH:

CONTACTS: 50 μINCHES GOLD IN CONTACT AREA
OVER 100 μINCHES NICKEL PLATE OVERALL.
PLUG SHIELDING: NICKEL PLATED

CABLE CHARACTERISTICS:

CAT 6, SHIELDED FOUR TWISTED PAIRS MODULAR CORD,
23 AWG SOLID BARE COPPER CONDUCTORS WITH
ALUM/POLY FOIL TAPE, PE TAPE, WATER BLOCK TAPE,
AND DRAIN WIRE.
UV RESISTANT, DIRECT BURIAL, OUTDOOR JACKET.

MISCELLANEOUS:

LENGTHS OVER 10 METERS (32.8 FT) ARE CHANNEL RATED.
OPERATING TEMPERATURE RANGE: -40°C TO +60°C.
CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
CABLE ASSEMBLY TO BE INDIVIDUALLY PACKAGED IN
ACCORDANCE WITH L-COM SPECIFICATION PS-0031.



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [1.51] .XXX = ±.005 [1.3] PROJECTION 	APPROVALS	DATE	 50 HIGH STREET NORTH ANDOVER, MA 01845	
	DRAWN BY DFRISIELLO	10/03/2016		
	CHECKED BY JWhite	10/03/2016	CATEGORY TELECOM/MODULAR	
	APPROVED BY DGUTTADAURO	10/21/2016	PRODUCT DESCRIPTION RJ45 C6 F/UTP PE BLK	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
			DWG. NO. TRD695ODS	REV. D
			SCALE: NONE	CAD FILE: TRD695ODS.SLDDRW
				SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Cables / Networking Cables](#) ***category:***

Click to view products by [L-Com](#) ***manufacturer:***

Other Similar products are found below :

[73-7795-1](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [1-1997459-2](#) [1-1997459-3](#) [ASP-144414-04](#) [E16A06002M030](#) [18169-0524](#) [1969343-6](#)
[C5UMB3FBG](#) [21949-1](#) [360031](#) [AX100351](#) [09459711142](#) [73-7793-1](#) [WHU18-1836-060](#) [1-3636-620-5214](#) [STS](#) [09470303023](#) [09459711118](#)
[1404682](#) [C5SMB14FBG](#) [CA21116001](#) [WK-100](#) [UTPCH22VLY](#) [UTPSP50BLY](#) [C6F1106003](#) [UTPSP16MRDY](#) [UTPSP16MGRY](#)
[UTP28CH30MBL](#) [AX105520](#) [CAPFCU-B25](#) [CB8MMBK-B100](#) [DK-1511-002/B](#) [STP6X1BU](#) [904873-000](#) [17-103134](#) [1110401155](#)
[09459711186](#) [EL6614](#) [MRC191ZN79H1](#) [SSFPP-P03M0-2](#) [1426514](#) [1413684](#) [1426515](#) [1414043](#) [1413685](#) [7000-44511-6590150](#) [7000-](#)
[44511-7940300](#) [7000-44561-7940150](#)