


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
G	ECN 5471: ADDED SHEETS 2 & 3 FOR COLORS	5/2/11	D.FRISIELLO

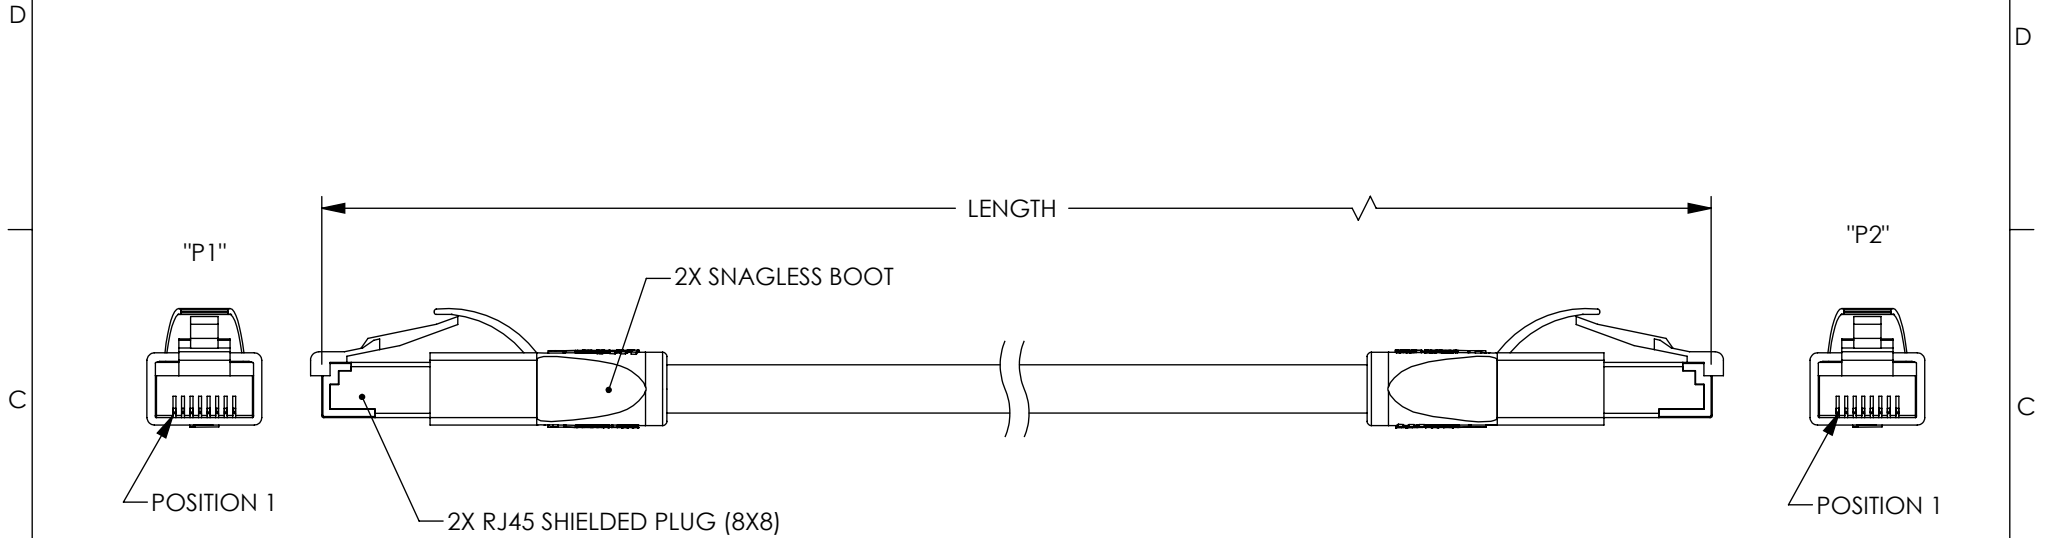

NOTES:

MATERIAL:

PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0
CONTACTS: PHOSPHOR BRONZE
CABLE JACKET: PVC, COLOR: SEE CHART
PLUG SHIELDING: BRASS
SNAGLESS BOOT: LSZH, BLACK

FINISH:


CONTACTS: 50 μ INCHES GOLD IN CONTACT AREA
OVER 100 μ INCHES NICKEL PLATE OVERALL
PLUG SHIELDING: NICKEL PLATED

CABLE CHARACTERISTICS:

SHIELDED, FOUR TWISTED PAIR, CAT 6 MODULAR CABLE
CONDUCTORS: 26 AWG (7/34) STRANDED COPPER, 100 Ω NOMINAL IMPEDANCE
SHIELDING: ALUMINUM/POLYESTER (100% SHIELD COVERAGE)

MISCELLANEOUS:

DRAIN WIRE TIED TO CONNECTOR SHELLS.
PLUG CONFORMS TO TIA-1096.
OPERATING TEMPERATURE RANGE: -20°C TO +60°C.
CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

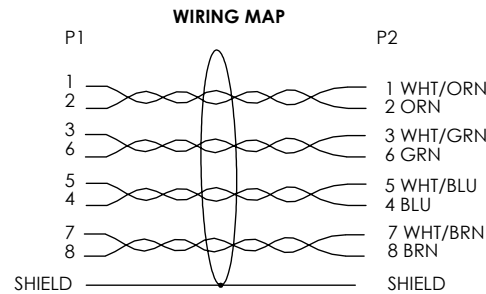

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005 PROJECTION 	APPROVALS DRAWN BY D. PARHAM CHECKED BY J. KIEZULAS APPROVED BY C. McCORMICK	DATE 03/15/2006 03/15/2006 03/16/2003	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845 CATEGORY TELECOM/MODULAR PRODUCT DESCRIPTION CATEGORY 6 SHIELDED PATCH CORD SIZE A FSCM NO. 43321 DWG. NO. TRD695SCR REV. G
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	
	REF	SCALE: NONE	
	CAD FILE: TRD695SCR.SLDDRW	SHEET 1 OF 3	

8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF L-COM, INC., ANY REPRODUCTION IN PART OR WHOLE
WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

D

C

B

A

MODEL NO.	LENGTH FEET [METERS]	COLOR
TRD695SCR-1	1.0 [.30]	GRAY
TRD695SCR-2	2.0 [.61]	GRAY
TRD695SCR-3	3.0 [.91]	GRAY
TRD695SCR-5	5.0 [1.52]	GRAY
TRD695SCR-7	7.0 [2.13]	GRAY
TRD695SCR-10	10.0 [3.05]	GRAY
TRD695SCR-15	15.0 [4.57]	GRAY
TRD695SCR-20	20.0 [6.10]	GRAY
TRD695SCR-25	25.0 [7.62]	GRAY
TRD695SCR-30	30.0 [9.14]	GRAY
TRD695SCR-40	40.0 [12.20]	GRAY
TRD695SCR-50	50.0 [15.24]	GRAY
TRD695SCR-60	60.0 [18.29]	GRAY
TRD695SCR-75	75.0 [22.86]	GRAY
TRD695SCR-80	80.0 [24.38]	GRAY
TRD695SCR-90	90.0 [27.43]	GRAY
TRD695SCR-100	100.0 [30.48]	GRAY
TRD695SCR-150	150.0 [45.72]	GRAY
TRD695SCR-200	200.0 [60.96]	GRAY
TRD695SCR-BL-1	1.0 [.30]	BLUE
TRD695SCR-BL-2	2.0 [.61]	BLUE
TRD695SCR-BL-3	3.0 [.91]	BLUE
TRD695SCR-BL-5	5.0 [1.52]	BLUE
TRD695SCR-BL-7	7.0 [2.13]	BLUE
TRD695SCR-BL-10	10.0 [3.05]	BLUE
TRD695SCR-BL-15	15.0 [4.57]	BLUE
TRD695SCR-BL-20	20.0 [6.10]	BLUE
TRD695SCR-BL-25	25.0 [7.62]	BLUE
TRD695SCR-BL-30	30.0 [9.14]	BLUE
TRD695SCR-BL-40	40.0 [12.20]	BLUE
TRD695SCR-BL-50	50.0 [15.24]	BLUE
TRD695SCR-BL-60	60.0 [18.29]	BLUE
TRD695SCR-BL-75	75.0 [22.86]	BLUE
TRD695SCR-BL-80	80.0 [24.38]	BLUE
TRD695SCR-BL-90	90.0 [27.43]	BLUE
TRD695SCR-BL-100	100.0 [30.48]	BLUE
TRD695SCR-BL-150	150.0 [45.72]	BLUE
TRD695SCR-BL-200	200.0 [60.96]	BLUE

MODEL NO.	LENGTH FEET [METERS]	COLOR
TRD695SCR-BLK-1	1.0 [.30]	BLACK
TRD695SCR-BLK-2	2.0 [.61]	BLACK
TRD695SCR-BLK-3	3.0 [.91]	BLACK
TRD695SCR-BLK-5	5.0 [1.52]	BLACK
TRD695SCR-BLK-7	7.0 [2.13]	BLACK
TRD695SCR-BLK-10	10.0 [3.05]	BLACK
TRD695SCR-BLK-15	15.0 [4.57]	BLACK
TRD695SCR-BLK-20	20.0 [6.10]	BLACK
TRD695SCR-BLK-25	25.0 [7.62]	BLACK
TRD695SCR-BLK-30	30.0 [9.14]	BLACK
TRD695SCR-BLK-40	40.0 [12.20]	BLACK
TRD695SCR-BLK-50	50.0 [15.24]	BLACK
TRD695SCR-BLK-60	60.0 [18.29]	BLACK
TRD695SCR-BLK-75	75.0 [22.86]	BLACK
TRD695SCR-BLK-80	80.0 [24.38]	BLACK
TRD695SCR-BLK-90	90.0 [27.43]	BLACK
TRD695SCR-BLK-100	100.0 [30.48]	BLACK
TRD695SCR-BLK-150	150.0 [45.72]	BLACK
TRD695SCR-BLK-200	200.0 [60.96]	BLACK
TRD695SCR-GR-1	1.0 [.30]	GREEN
TRD695SCR-GR-2	2.0 [.61]	GREEN
TRD695SCR-GR-3	3.0 [.91]	GREEN
TRD695SCR-GR-5	5.0 [1.52]	GREEN
TRD695SCR-GR-7	7.0 [2.13]	GREEN
TRD695SCR-GR-10	10.0 [3.05]	GREEN
TRD695SCR-GR-15	15.0 [4.57]	GREEN
TRD695SCR-GR-20	20.0 [6.10]	GREEN
TRD695SCR-GR-25	25.0 [7.62]	GREEN
TRD695SCR-GR-30	30.0 [9.14]	GREEN
TRD695SCR-GR-40	40.0 [12.20]	GREEN
TRD695SCR-GR-50	50.0 [15.24]	GREEN
TRD695SCR-GR-60	60.0 [18.29]	GREEN
TRD695SCR-GR-75	75.0 [22.86]	GREEN
TRD695SCR-GR-80	80.0 [24.38]	GREEN
TRD695SCR-GR-90	90.0 [27.43]	GREEN
TRD695SCR-GR-100	100.0 [30.48]	GREEN
TRD695SCR-GR-150	150.0 [45.72]	GREEN
TRD695SCR-GR-200	200.0 [60.96]	GREEN

D

C

B

A

		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
CATEGORY TELECOM/MODULAR			
PRODUCT DESCRIPTION CATEGORY 6 SHIELDED PATCH CORD			
SIZE A	FSCM NO. 43321	DWG. NO. TRD695SCR	REV. G
SCALE: NONE		CAD FILE: TRD695SCR.SLDDRW	SHEET 2 OF 3

8 7 6 5 4 3 2 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Cables / Networking Cables](#) ***category:***

Click to view products by [L-Com](#) ***manufacturer:***

Other Similar products are found below :

[73-7795-1](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [1-1997459-2](#) [1-1997459-3](#) [ASP-144414-04](#) [E16A06002M030](#) [18169-0524](#) [1969343-6](#)
[C5UMB3FBG](#) [21949-1](#) [360031](#) [AX100351](#) [09459711142](#) [73-7793-1](#) [WHU18-1836-060](#) [1-3636-620-5214](#) [STS](#) [09470303023](#) [09459711118](#)
[1404682](#) [C5SMB14FBG](#) [CA21116001](#) [WK-100](#) [UTPCH22VLY](#) [UTPSP50BLY](#) [C6F1106003](#) [UTPSP16MRDY](#) [UTPSP16MGRY](#)
[UTP28CH30MBL](#) [AX105520](#) [CAPFCU-B25](#) [CB8MMBK-B100](#) [DK-1511-002/B](#) [STP6X1BU](#) [904873-000](#) [17-103134](#) [1110401155](#)
[09459711186](#) [EL6614](#) [MRC191ZN79H1](#) [SSFPP-P03M0-2](#) [1426514](#) [1413684](#) [1426515](#) [1414043](#) [1413685](#) [7000-44511-6590150](#) [7000-](#)
[44511-7940300](#) [7000-44561-7940150](#)