


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/05/19	DGUTTADAUR

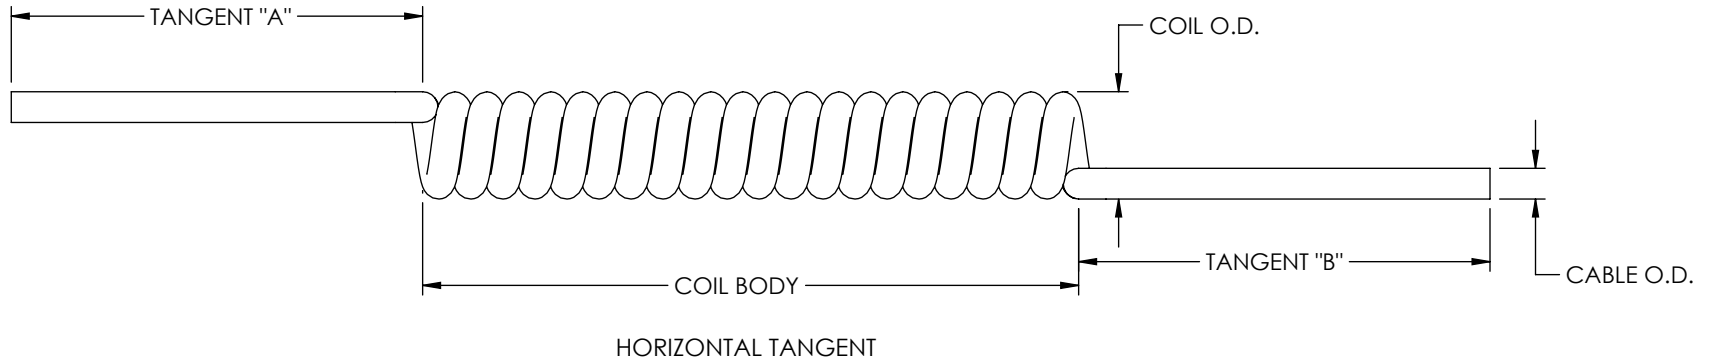

NOTES:

1. CONSTRUCTION:

CONDUCTOR: 26AWG 7/.0068 STRANDED TINNED COPPER
INSULATION: HIGH DENSITY POLYETHYLENE, .008" NOM. WALL THICKNESS .0365" MAX
PAIRS: COLOR CODED SINGLE TWISTED INTO PAIRS
CABLE: (4) TWISTED PAIRS TWISTED TOGETHER TO FORM A CABLE CORE
SEPERATOR: AN OVERALL TISSUE TAPE SHALL BE APPLIED OVER THE CABLE CORE
JACKET: POLYURETHANE, BLACK, .040" NOM. WALL THICKNESS (PRESSURE)
OVERALL DIAMETER .240" NOM.

2. PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX. 60°C
TEMPERATURE RATING, MIN. -20°C

3. ELECTRICAL:

DIELECTRIC WITHSTANDING, MIN. 1500V RMS
VOLTAGE RATING, MAX. 300V
D.C. RESISTANCE, MAX. 42.6 OHM/1000FT


4. PRINT: (WHITE INK)

QUABBIN DATAMAX EXTREME ETHERCOIL P/N 080042-RoHS-(LOT DESIGNATOR)
(SEQUENTIAL FOOTAGE)

5. COLOR CODE:

1. WHITE/BLUE X BLUE
2. WHITE/ORANGE X ORANGE
3. WHITE/GREEN X GREEN
4. WHITE/BROWN X BROWN

PART NUMBER	CABLE O.D.	COIL O.D. (APPROX.)	COIL BODY LENGTH	TANGENT LENGTHS	EXPANDED COIL LENGTH
TRD815-CH-6-18IN-BC	.240	1.0 INCH	0.5 FEET	0.5 FEET	1.5 FEET
TRD815-CH-1-3F-BC	.240	1.0 INCH	1 FEET	0.5 FEET	3 FEET
TRD815-CH-2-6F-BC	.240	1.0 INCH	2 FEET	0.5 FEET	6 FEET
TRD815-CH-3-9F-BC	.240	1.0 INCH	3 FEET	0.5 FEET	9 FEET
TRD815-CH-4-12F-BC	.240	1.0 INCH	4 FEET	0.5 FEET	12 FEET
TRD815-CH-5-15F-BC	.240	1.0 INCH	5 FEET	0.5 FEET	15 FEET
TRD815-CH-6-18F-BC	.240	1.0 INCH	6 FEET	0.5 FEET	18 FEET
TRD815-CH-7-21F-BC	.240	1.0 INCH	7 FEET	0.5 FEET	21 FEET
TRD815-CH-8-24F-BC	.240	1.0 INCH	8 FEET	0.5 FEET	24 FEET

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		L-com™ an INFINITT® brand		50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936	
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS .XX = ± .02 [.5] ± 1/32 .XXX = ± .005 [.13] ANGLES ± 1° THIRD-ANGLE PROJECTION 		DRAWN BY BPUCHASKI		11/04/19		CATEGORY TELECOM/MODULAR		PRODUCT DESCRIPTION UNTERMINATED COILED BULK FOR TRD815-CH SERIES	
		CHECKED BY DFRISIELLO		11/04/19					
		APPROVED BY DGUTTADAUR		11/04/19					
		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A		CAGE CODE 43321		DWG. NO. TRD815-CH	
		COLOR VARIATIONS MAY OCCUR		SCALE: NONE		CAD FILE: TRD815-CH.SLDDRW			
						SHEET 1 OF 1			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Cables / Networking Cables](#) ***category:***

Click to view products by [L-Com](#) ***manufacturer:***

Other Similar products are found below :

[73-7795-1](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [1-1997459-2](#) [1-1997459-3](#) [ASP-144414-04](#) [E16A06002M030](#) [18169-0524](#) [1969343-6](#)
[C5UMB3FBG](#) [21949-1](#) [360031](#) [AX100351](#) [09459711142](#) [73-7793-1](#) [WHU18-1836-060](#) [1-3636-620-5214](#) [STS](#) [09470303023](#) [09459711118](#)
[1404682](#) [C5SMB14FBG](#) [CA21116001](#) [WK-100](#) [UTPCH22VLY](#) [UTPSP50BLY](#) [C6F1106003](#) [UTPSP16MRDY](#) [UTPSP16MGRY](#)
[UTP28CH30MBL](#) [AX105520](#) [CAPFCU-B25](#) [CB8MMBK-B100](#) [DK-1511-002/B](#) [STP6X1BU](#) [904873-000](#) [17-103134](#) [1110401155](#)
[09459711186](#) [EL6614](#) [MRC191ZN79H1](#) [SSFPP-P03M0-2](#) [1426514](#) [1413684](#) [1426515](#) [1414043](#) [1413685](#) [7000-44511-6590150](#) [7000-](#)
[44511-7940300](#) [7000-44561-7940150](#)