




- ⬡ IP68 rating tested at 1.054kg/sq cm (15lb/sq in) 10m depth for 2 weeks
- ⬡ IP69K, Tested in accordance with DIN 40050/Part 9 IP6k9k
- ⬡ 2 and 3 Contact - 8A, 250V rating
- ⬡ 4, 6 and 8 Contact - 5A, 125V rating
- ⬡ 10 and 12 Contact - 1A, 50V rating
- ⬡ 2.5mm contact engagement for electrical integrity 'Scoop proof' contacts
- ⬡ Contact inserts are part of body moulding
- ⬡ Cable range from 3 to 7mm
- ⬡ Overall length (flex + Inline) 80mm
- ⬡ Gold plated contacts
- ⬡ Diameter over coupling ring 19.1mm
- ⬡ Pre-wired, overmoulded cable assemblies
- ⬡ Flex, Inline, Front Panel, Rear Panel and PCB mounting body styles
- ⬡ Plug and Socket versions in all body styles
- ⬡ Flame Retardant moulding material - Polyamide UL94-V0
- ⬡ Contacts supplied separately (except PCB versions)
- ⬡ Sealing caps available to maintain IP68 rating
- ⬡ Secure sealing system
- ⬡ Crimp and solder contacts
- ⬡ PCB mounting connector supplied with contacts pre-loaded
- ⬡ Front and rear panel mounting panel connectors
- ⬡ VDE and cULus approvals
- ⬡ EN60068-2-52 Test Kb Salt Mist (Cyclic) Marine Severity Level 1
- ⬡ Smart options available with EEPROM memory chip

Flex Cable Connector



PX0410

- Mates with Inline or Panel mounting versions PX0401, PX0411, PX0412 & PX0413
- Plug or socket
- 2, 3, 4, 6, 8, 10 or 12 Contact
- Screw locking ring
- Contacts supplied separately

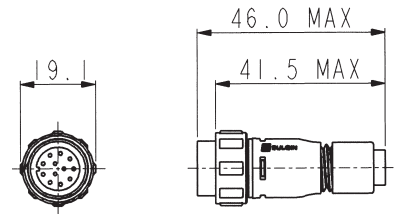


Inline Cable Connector



PX0411

- Mates with Flex Cable connectors PX0400, PX0402 & PX0410
- Plug or socket
- 2, 3, 4, 6, 8, 10 or 12 Contact
- For Inline cable connection
- Contacts supplied separately

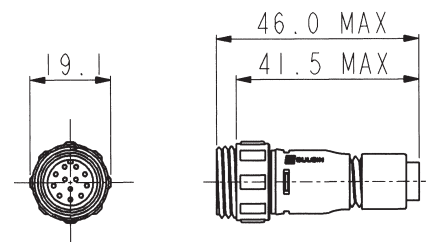


Pre Wired Flex Cable Connector



PX0400

- Overmoulded Flex connector for pre-wired cable assemblies
- Plug or socket
- Cable range 2.5 -9.0mm O/D
- 2, 3, 4, 6, 8, 10 or 12 Contact
- Mates with PX0401 & PX0411 Inline connectors and PX0412 & PX0413 panel mounting connectors

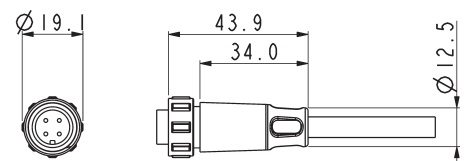


Pre Wired Flex Cable Connector



PX0402

- Right-angled overmoulded Flex connector for pre-wired cable assemblies
- Plug or socket
- Cable range 2.5 -9.0mm O/D
- 2, 3, 4, 6, 8, 10 or 12 Contact
- Mates with PX0401 & PX0411 Inline connectors and PX0412 & PX0413 panel mounting connectors




Smart Connector



PXS410

- Overmoulded pre-wired sealed connector
- 4, 6, 8, 10, 12 Contact
- Embedded memory chip through 1 wire EEPROM
- Mates with PX0401 & PX0411 Inline connectors and PX0412 & PX0413 panel mounting connectors

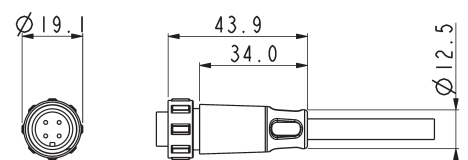


Front Panel Mounting Connector



PX0412

- Mates with Flex Cable connectors PX0410, PX0400 & PX0402
- Single hole fixing
- Contacts supplied separately
- 2, 3, 4, 6, 8, 10 or 12 Contact

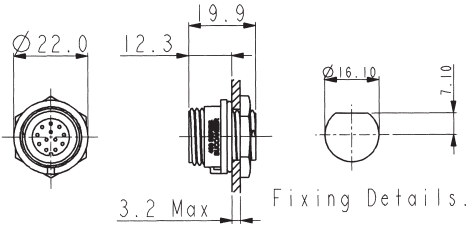


Rear Panel Mounting Connector



PX0413/XXX

- Mates with Flex Cable connector PX0410, PX0400 & PX0402
- Single hole fixing
- Contacts supplied separately
- 2, 3, 4, 6, 8, 10 or 12 Contact

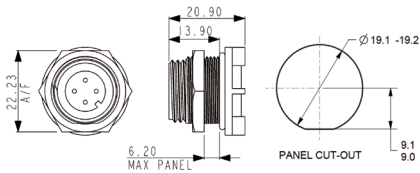


PCB Mounting Connector



PX0413/XXX/PC

- Mates with Flex Cable connector PX0410, PX0400 & PX0402
- PCB Rear Panel mounting
- Straight PC spills
- Supplied with pre-loaded gold plated contacts
- 2, 3, 4, 6, 8, 10 or 12 Contact

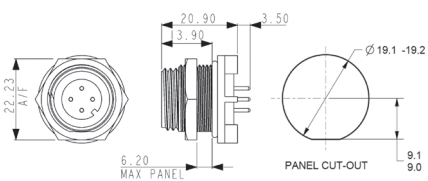

Sealing Caps



PX0480 PX0480/1 PX0481 PX0484

- Maintains IP68 Rating of Unmated Connectors
- PX0480: Fits PX0412 (panel mounting)
- PX0480/1: Fits PX0401 & PX0411 (Inline)
- PX0481: Fits PX0400, PX0402 & PX0410 (flex connector)
- PX0484: Fits PX0413 (PCB and rear panel mount)

Gland Packs

Part No	Description
PX0482	Pack of 4 pairs cable glands and collets to suit cables from 3.0 to 5.0mm diameter.
PX0483	Pack of 4 pairs cable glands and collets to suit cables from 5.0 to 7.0mm diameter.

Crimp Contacts

Contact	Current Rating	Plug Part No.	Socket Part No.	Pack Qty	Cable Acceptance (dia)
2, 3	8A	SA3350	SA3349	10	20 - 24 AWG
4, 6, 8	5A	SA3348	SA3347	10	22 - 26 AWG
10, 12	1A	SA3180	SA3179	10	24 - 28 AWG

Solder Contacts

Contact	Current Rating	Plug Part No.	Socket Part No.	Pack Qty	Cable Acceptance (dia)
2, 3	8A	SA3350/1	SA3349/1	10	20 - 24 AWG
4, 6, 8	5A	SA3348/1	SA3347/1	10	22 - 26 AWG
10, 12	1A	SA3180/1	SA3179/1	10	24 - 28 AWG

Insertion / Extraction

	Contacts	Contact Rating	Colour	Part No
Insertion/Extraction Tool	2,3	8A	Blue	13027/2
Insertion/Extraction Tool	4,6,8	5A	Red	13027/1
Insertion/Extraction Tool	10,12	1A	Green	13027


Crimp tools

	Contacts	Contact Rating	Colour	Part No
Positioner	2,3	8A	Blue	14025/8AMP
Positioner	4,6,8	5A	Red	14025/5AMP
Positioner	10,12	1A	Green	14025/1AMP
8 Indent Crimp Tool for use with positioners				14025

PX0413 PCB Contact Layout


Sockets

Contact numbers viewed from rear of panel

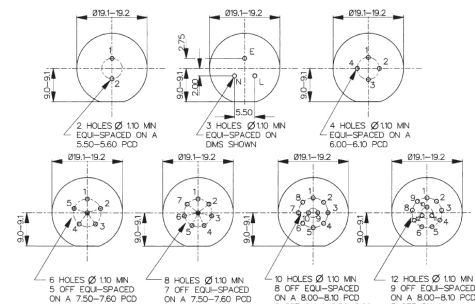

Plugs

Contact numbers viewed from rear of panel

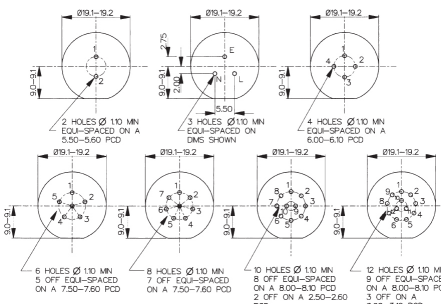

2 Contact
(8 Amp)



3 Contact
(8 Amp)




4 Contact
(5 Amp)



6 Contact
(5 Amp)



8 Contact
(5 Amp)



10 Contact
(1 Amp)



12 Contact
(1 Amp)

Electrical:

No. Contacts:	2, 3	4, 6, 8	10, 12
Current Rating:	8A	5A	1A
Voltage Rating:	250V AC/DC	125V AC/DC	50V AC/DC
Contact Resistance:	<5mΩ		
Insulation Resistance:	>10 ⁶ MΩ (@ 500V DC)		
AC Breakdown voltage:	2.5kV		
Cycles:	>1000		
Operating Temperature:			
Flex and panel types	-40°C to +80°C		
Overmoulded	-20°C to +60°C		

Approvals:

 cULus (Underwriters Laboratory)	E214972
 VDE (Verband der Elektrotechnik)	40002226


Overmoulded cable assemblies
approvals to customer requirements.

Material:

Flex and panel types:	
Body Mouldings:	Polyamide
Flammability Rating:	UL94V-0
UV Resistance:	To EN 50021:1999
Overmoulded types:	
Body Mouldings:	Polyurethane
Flammability Rating:	UL94V-HB
Contacts:	Copper alloy, Gold plated
O Rings:	Nitrile
Panel Sealing O Ring:	Nitrile
RoHS	Compliant

Smart Connector EEPROM:

1024 - Bit Memory
1 - Wire
Can be Write Protected
Manufacturer - Maxim Intergrated
Part Number - 0S2431

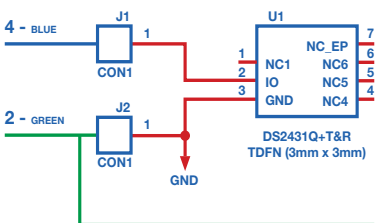

Mechanical:

Sealing:	IP69K, Tested in accordance with DIN 40050/Part 9 IP6k9k
	IP68, EN60529:1992+A2:2013 tested @ 1.054kg/sq cm (15lb/sq in) 10m depth for 2 weeks
Salt Mist:	EN60068-2-52 Test Kb Salt Mist (Cyclic) Marine Severity Level 1
Cable Acceptance:	3.0 - 7.0mm
Contact Accommodation:	2, 3 Contact, 20 - 24 AWG 4, 6, 8 Contact, 22 - 26 AWG 10, 12 Contact, 24 - 28 AWG
Termination:	Crimp, solder and PCB
Insertion/Withdrawal Force:	
No. Contacts:	2 3 4 6 8 10 12
Insertion Force (typ):	19N 25N 27N 27N 28N 55N 62N
Withdrawal Force (typ):	12N 17N 17N 21N 22N 25N 29N
Tightening Torques:	
Panel mount (PX0412)	
Rear fixing nut:	1.0-1.1Nm (9lbf.in.)
Panel mount (PX0413)	
Front fixing nut:	1.0-1.1Nm (9lbf.in.)
Cable Retention force:	
3.0mm dia	60N
4.0 to 7.0mm dia	80N
Rear panel thread PX0412:	M16x1.5
Panel thread PX0413:	18.97x26TPI Whitworth form to BS84 med fit

Dimensions:

Overall dimensions of connectors when mated together

Flex + Inline	80mm
Dia. over coupling ring	19.1mm

Dia. over coupling ring

Plug	/	Wire Colour
1		Red
2		Green
3		Yellow
4		Blue
5		White
6		Black
7		Brown
8		Violet
9		Orange
10		Pink
11		Turquoise
12		Grey

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Cables / Networking Cables](#) ***category:***

Click to view products by [L-Com](#) ***manufacturer:***

Other Similar products are found below :

[73-7795-1](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [1-1997459-2](#) [1-1997459-3](#) [ASP-144414-04](#) [E16A06002M030](#) [18169-0524](#) [1969343-6](#)
[C5UMB3FBG](#) [21949-1](#) [360031](#) [AX100351](#) [09459711142](#) [73-7793-1](#) [WHU18-1836-060](#) [1-3636-620-5214](#) [STS](#) [09470303023](#) [09459711118](#)
[1404682](#) [C5SMB14FBG](#) [CA21116001](#) [WK-100](#) [UTPCH22VLY](#) [UTPSP50BLY](#) [C6F1106003](#) [UTPSP16MRDY](#) [UTPSP16MGRY](#)
[UTP28CH30MBL](#) [AX105520](#) [CAPFCU-B25](#) [CB8MMBK-B100](#) [DK-1511-002/B](#) [STP6X1BU](#) [904873-000](#) [17-103134](#) [1110401155](#)
[09459711186](#) [EL6614](#) [MRC191ZN79H1](#) [SSFPP-P03M0-2](#) [1426514](#) [1413684](#) [1426515](#) [1414043](#) [1413685](#) [7000-44511-6590150](#) [7000-](#)
[44511-7940300](#) [7000-44561-7940150](#)