


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
H	ECN 3639: REMOVED SPOOL FROM PACKAGING NOTE	10/14/2008	DFRISIELLO
J	ECN 11675: REMOVED LENGTHS 200, 250, & 300	02/18/2022	GUTTADAURO

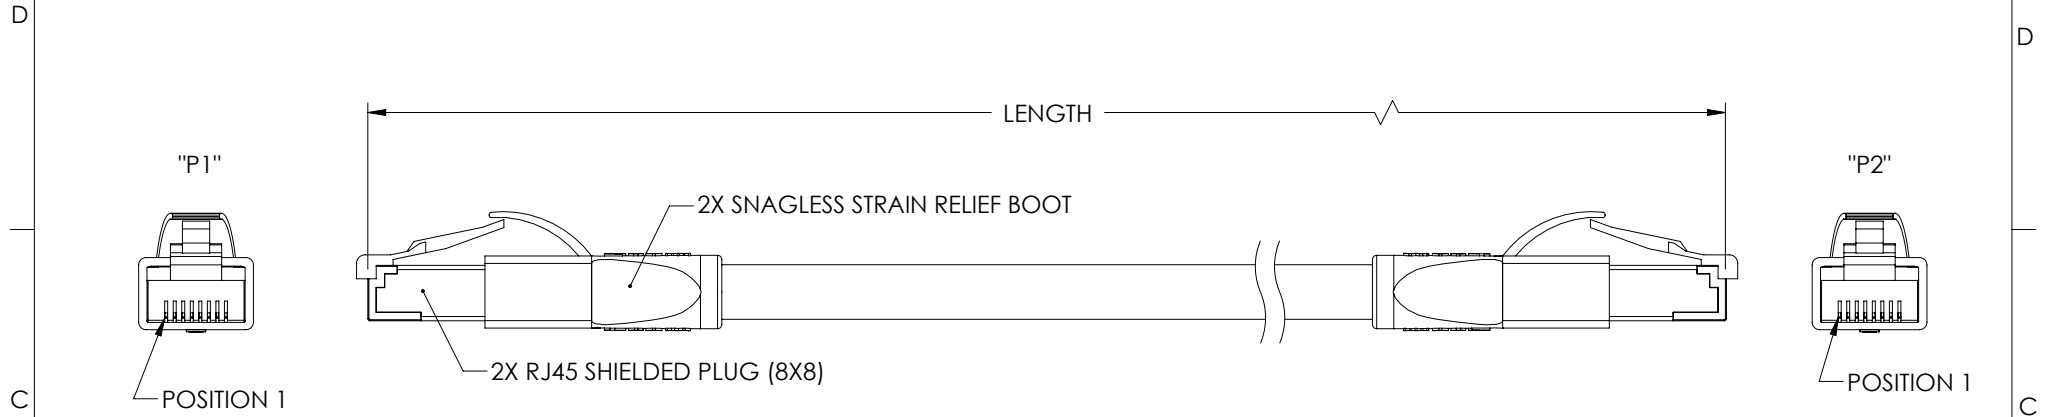

NOTES:

MATERIAL:

PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0
CONTACTS: PHOSPHOR BRONZE
CABLE JACKET: POLYURETHANE, GREEN
PLUG SHIELDING: BRASS
SNAGLESS BOOT: LSZH, BLACK

FINISH:

CONTACTS: 50 μ INCHES GOLD IN CONTACT AREA
OVER 100 μ INCHES NICKEL PLATE OVERALL
PLUG SHIELDING: NICKEL PLATED

CABLE CHARACTERISTICS:

SHIELDED, FOUR TWISTED PAIR, CAT 5E MODULAR CABLE
CONDUCTORS: 26 AWG (19/38) STRANDED COPPER


MISCELLANEOUS:

ASSEMBLY WIRED PER TIA/EIA 568B SEQUENCE
DRAIN WIRE TIED TO CONNECTOR SHIELDS
PLUG CONFORMS TO TIA-1096
OPERATING TEMPERATURE RANGE:
STATIONARY USE: -40°C TO +80°C
CONTINUOUS FLEXING: -20°C TO +80°C
CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
CABLE ASSEMBLY TO BE INDIVIDUALLY PACKAGED IN A POLYBAG.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

PART NUMBER	LENGTH		PART NUMBER	LENGTH	
	FEET	METERS		FEET	METERS
TRD855HFX-1	1	0.31	TRD855HFX-50	50	15.24
TRD855HFX-2	2	0.61	TRD855HFX-60	60	18.29
TRD855HFX-3	3	0.91	TRD855HFX-75	75	22.86
TRD855HFX-5	5	1.52	TRD855HFX-80	80	24.38
TRD855HFX-7	7	2.13	TRD855HFX-90	90	27.43
TRD855HFX-10	10	3.05	TRD855HFX-100	100	30.48
TRD855HFX-15	15	4.57	TRD855HFX-150	150	45.72
TRD855HFX-20	20	6.09			
TRD855HFX-25	25	7.62			
TRD855HFX-30	30	9.14			
TRD855HFX-40	40	12.19			

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS .XX = ± .02 [.5] ± 1/32 .XXX = ± .005 [.13] ANGLES ± 1° THIRD-ANGLE PROJECTION 	APPROVALS	DATE	 an INFINIT™ brand	50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936	
	DRAWN BY D. PARHAM	03/15/2006			CATEGORY TELECOM/MODULAR
	CHECKED BY J. KIEZULAS	03/16/2006			
	APPROVED BY C. McCORMICK	03/16/2006			
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			PRODUCT DESCRIPTION CAT 5E SHIELDED, HI-FLEX PATCH CORD		
COLOR VARIATIONS MAY OCCUR			SIZE A	CAGE CODE 43321	ITEM NO. TRD855HFX
			SCALE: NONE		CAD FILE: TRD855HFX.SLDDRW
					REV. J
			SHEET 1 OF 1		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Cables / Networking Cables](#) ***category:***

Click to view products by [L-Com](#) ***manufacturer:***

Other Similar products are found below :

[73-7795-1](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [1-1997459-2](#) [1-1997459-3](#) [ASP-144414-04](#) [E16A06002M030](#) [18169-0524](#) [1969343-6](#)
[C5UMB3FBG](#) [21949-1](#) [360031](#) [AX100351](#) [09459711142](#) [73-7793-1](#) [WHU18-1836-060](#) [1-3636-620-5214](#) [STS](#) [09470303023](#) [09459711118](#)
[1404682](#) [C5SMB14FBG](#) [CA21116001](#) [WK-100](#) [UTPCH22VLY](#) [UTPSP50BLY](#) [C6F1106003](#) [UTPSP16MRDY](#) [UTPSP16MGRY](#)
[UTP28CH30MBL](#) [AX105520](#) [CAPFCU-B25](#) [CB8MMBK-B100](#) [DK-1511-002/B](#) [STP6X1BU](#) [904873-000](#) [17-103134](#) [1110401155](#)
[09459711186](#) [EL6614](#) [MRC191ZN79H1](#) [SSFPP-P03M0-2](#) [1426514](#) [1413684](#) [1426515](#) [1414043](#) [1413685](#) [7000-44511-6590150](#) [7000-](#)
[44511-7940300](#) [7000-44561-7940150](#)