



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/04/2016	D.GRIFFIN
B	ECN 8696: ADD P/NS -1,-3 AND -75; ADD FLAME RATING	03/28/2017	SLI
C	ECN 9633: ADDED LENGTHS 15, 125, 150, 175, 200, 250 FT	01/15/2019	DFRISIELLO

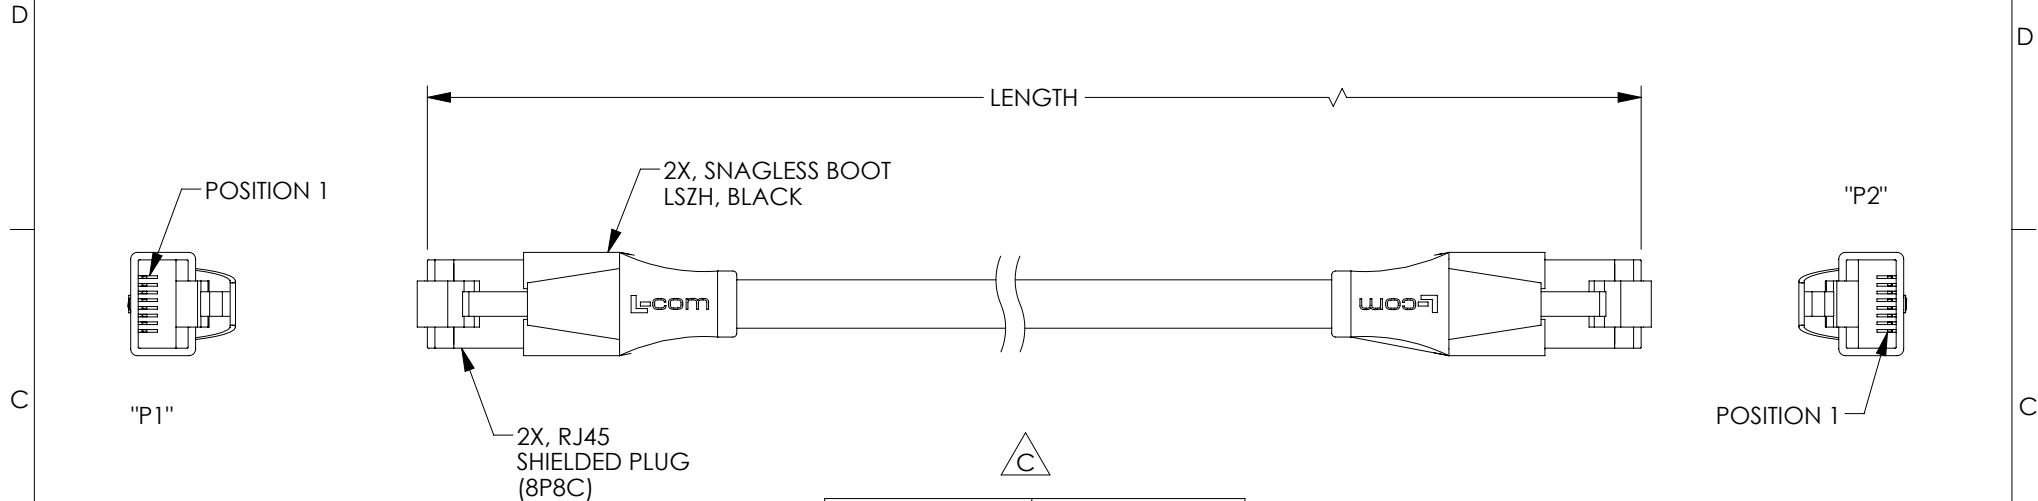

MODEL NUMBER	LENGTH	
	FEET	METERS
TRD855ODS-1	1.0	0.30
TRD855ODS-3	3.0	0.91
TRD855ODS-5	5.0	1.52
TRD855ODS-10	10.0	3.05
TRD855ODS-15	15.0	4.57
TRD855ODS-25	25.0	7.62
TRD855ODS-50	50.0	15.24
TRD855ODS-75	75.0	22.86
TRD855ODS-100	100.0	30.48
TRD855ODS-125	125.0	38.10
TRD855ODS-150	150.0	45.72
TRD855ODS-175	175.0	53.34
TRD855ODS-200	200.0	60.96
TRD855ODS-225	225.0	68.58
TRD855ODS-250	250.0	76.20

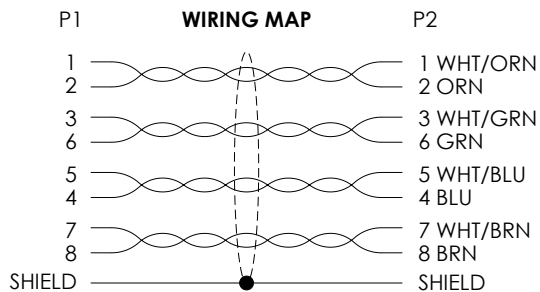

NOTES:

MATERIAL:

PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0
CONTACTS: PHOSPHOR BRONZE.
PLUG SHIELDING: BRASS.
CABLE JACKET: LINEAR LOW-DENSITY POLYETHYLENE, BLACK, (LLDPE)

FINISH:

CONTACTS: 50 μ INCHES GOLD IN CONTACT AREA
OVER 100 μ INCHES NICKEL PLATE OVERALL.
PLUG SHIELDING: NICKEL PLATED.

CABLE CHARACTERISTICS:

CAT 5E, SHIELDED FOUR TWISTED PAIRS MODULAR CORD,
24 AWG SOLID BARE COPPER CONDUCTORS WITH
ALUM/POLY FOIL TAPE, PE TAPE AND DRAIN WIRE.
UV RESISTANT OUTDOOR JACKET.
FLAMMABILITY: UL CMX

MISCELLANEOUS:

LENGTHS OVER 10 METERS (32.8 FT) ARE CHANNEL RATED.
OPERATING TEMPERATURE RANGE: -40°C TO +70°C.
CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
CABLE ASSEMBLY TO BE INDIVIDUALLY PACKAGED IN
ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 >12 [305] ≤ 60 [1524] = +2 [51] / -0 >60 [1524] ≤ 120 [3048] = +4 [102] / -0 >120 [3048] ≤ 300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = $\pm .2$ [5.08] .XX = $\pm .02$ [51] .XXX = $\pm .005$ [127] PROJECTION 	APPROVALS	DATE	 50 HIGH STREET NORTH ANDOVER, MA 01845	
	DRAWN BY DFRISIELLO	10/03/2016		
	CHECKED BY JWHITE	10/03/2016	CATEGORY TELECOM/MODULAR	
	APPROVED BY D.DESJARDIN	10/03/2016	PRODUCT DESCRIPTION RJ45 C5E F/UTP PE BLK	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. TRD855ODS	REV. C
	SCALE: NONE	CAD FILE: TRD855ODS.SLDDRW	SHEET 1 OF 1	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Cables / Networking Cables](#) ***category:***

Click to view products by [L-Com](#) ***manufacturer:***

Other Similar products are found below :

[73-7795-1](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [1-1997459-2](#) [1-1997459-3](#) [ASP-144414-04](#) [E16A06002M030](#) [18169-0524](#) [1969343-6](#)
[C5UMB3FBG](#) [21949-1](#) [360031](#) [AX100351](#) [09459711142](#) [73-7793-1](#) [WHU18-1836-060](#) [1-3636-620-5214](#) [STS](#) [09470303023](#) [09459711118](#)
[1404682](#) [C5SMB14FBG](#) [CA21116001](#) [WK-100](#) [UTPCH22VLY](#) [UTPSP50BLY](#) [C6F1106003](#) [UTPSP16MRDY](#) [UTPSP16MGRY](#)
[UTP28CH30MBL](#) [AX105520](#) [CAPFCU-B25](#) [CB8MMBK-B100](#) [DK-1511-002/B](#) [STP6X1BU](#) [904873-000](#) [17-103134](#) [1110401155](#)
[09459711186](#) [EL6614](#) [MRC191ZN79H1](#) [SSFPP-P03M0-2](#) [1426514](#) [1413684](#) [1426515](#) [1414043](#) [1413685](#) [7000-44511-6590150](#) [7000-](#)
[44511-7940300](#) [7000-44561-7940150](#)