



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 3639: REMOVED SPOOL FROM PACKAGING NOTE	10/14/08	D.FRISIELLO
E	ECN99999: DELETED DRAIN WIRE NOTE	05/28/09	DFP

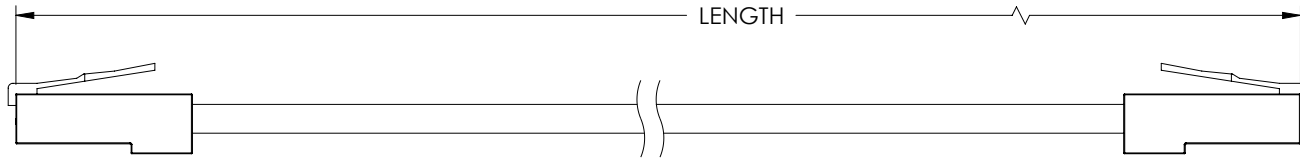

2X RJ45 PLUG (8 X 8)



POSITION 1

PART NUMBER	LENGTH		PART NUMBER	LENGTH	
	FEET	METERS		FEET	METERS
TRD855PL-1	1	0.31	TRD855PL-50	50	15.24
TRD855PL-2	2	0.61	TRD855PL-60	60	18.29
TRD855PL-3	3	0.91	TRD855PL-75	75	22.86
TRD855PL-5	5	1.52	TRD855PL-80	80	24.38
TRD855PL-7	7	2.13	TRD855PL-90	90	27.43
TRD855PL-10	10	3.05	TRD855PL-100	100	30.48
TRD855PL-15	15	4.57	TRD855PL-150	150	45.72
TRD855PL-20	20	6.1	TRD855PL-200	200	60.96
TRD855PL-25	25	7.62	TRD855PL-250	250	76.2
TRD855PL-30	30	9.14	TRD855PL-300	300	91.44
TRD855PL-40	40	12.19			

NOTES:

MATERIAL:

PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0
CONTACTS: PHOSPHOR BRONZE
CABLE JACKET: PLENUM, WHITE
PLUG SHIELDING: BRASS

FINISH:

CONTACTS: 50 μINCHES GOLD IN CONTACT AREA
OVER 100 μINCHES NICKEL PLATE OVERALL
PLUG SHIELDING: NICKEL PLATED

CABLE CHARACTERISTICS:

UNSHIELDED, FOUR TWISTED PAIR, CAT 5E MODULAR CABLE
CONDUCTORS: 24 AWG (7/34) SOLID COPPER

MISCELLANEOUS:

ASSEMBLY WIRED PER TIA/EIA 568B SEQUENCE
PLUG CONFORMS TO TIA-1096
OPERATING TEMPERATURE RANGE: 0°C TO +60°C
CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
CABLE ASSEMBLY TO BE INDIVIDUALLY PACKAGED IN A POLYBAG.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: >12 [305] - 60 [1524] = +1 [25] / - 0 >60 [1524] - 120 [3048] = +4 [102] / - 0 >120 [3048] - 300 [7620] = +6 [152] / - 0 >300 [7620] = +5% / - 0% ALL OTHER DIMENSIONAL TOLERANCES: .X = .3 .XX = .15 PROJECTION 	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY C.MCCORMICK	07/18/2006		
	CHECKED BY ENG	07/18/2006	CATEGORY MODULAR	
	APPROVED BY J.ROBERTS	07/18/2006	PRODUCT DESCRIPTION CAT 5e PLENUM PATCH CORD	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321	DWG. NO. TRD855PL
COLOR VARIATIONS MAY OCCUR		SCALE: NONE	CAD FILE: TRD855PL.SLDDRW	REV. E
		SHEET 1 OF 1		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Cables / Networking Cables](#) ***category:***

Click to view products by [L-Com](#) ***manufacturer:***

Other Similar products are found below :

[73-7795-1](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [1-1997459-2](#) [1-1997459-3](#) [ASP-144414-04](#) [E16A06002M030](#) [18169-0524](#) [1969343-6](#)
[C5UMB3FBG](#) [21949-1](#) [360031](#) [AX100351](#) [09459711142](#) [73-7793-1](#) [WHU18-1836-060](#) [1-3636-620-5214](#) [STS](#) [09470303023](#) [09459711118](#)
[1404682](#) [C5SMB14FBG](#) [CA21116001](#) [WK-100](#) [UTPCH22VLY](#) [UTPSP50BLY](#) [C6F1106003](#) [UTPSP16MRDY](#) [UTPSP16MGRY](#)
[UTP28CH30MBL](#) [AX105520](#) [CAPFCU-B25](#) [CB8MMBK-B100](#) [DK-1511-002/B](#) [STP6X1BU](#) [904873-000](#) [17-103134](#) [1110401155](#)
[09459711186](#) [EL6614](#) [MRC191ZN79H1](#) [SSFPP-P03M0-2](#) [1426514](#) [1413684](#) [1426515](#) [1414043](#) [1413685](#) [7000-44511-6590150](#) [7000-](#)
[44511-7940300](#) [7000-44561-7940150](#)