


8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
N	ECN 8337; ADD WIRING MAP; NEW FORMAT	05/15/2014	B.ZHANG

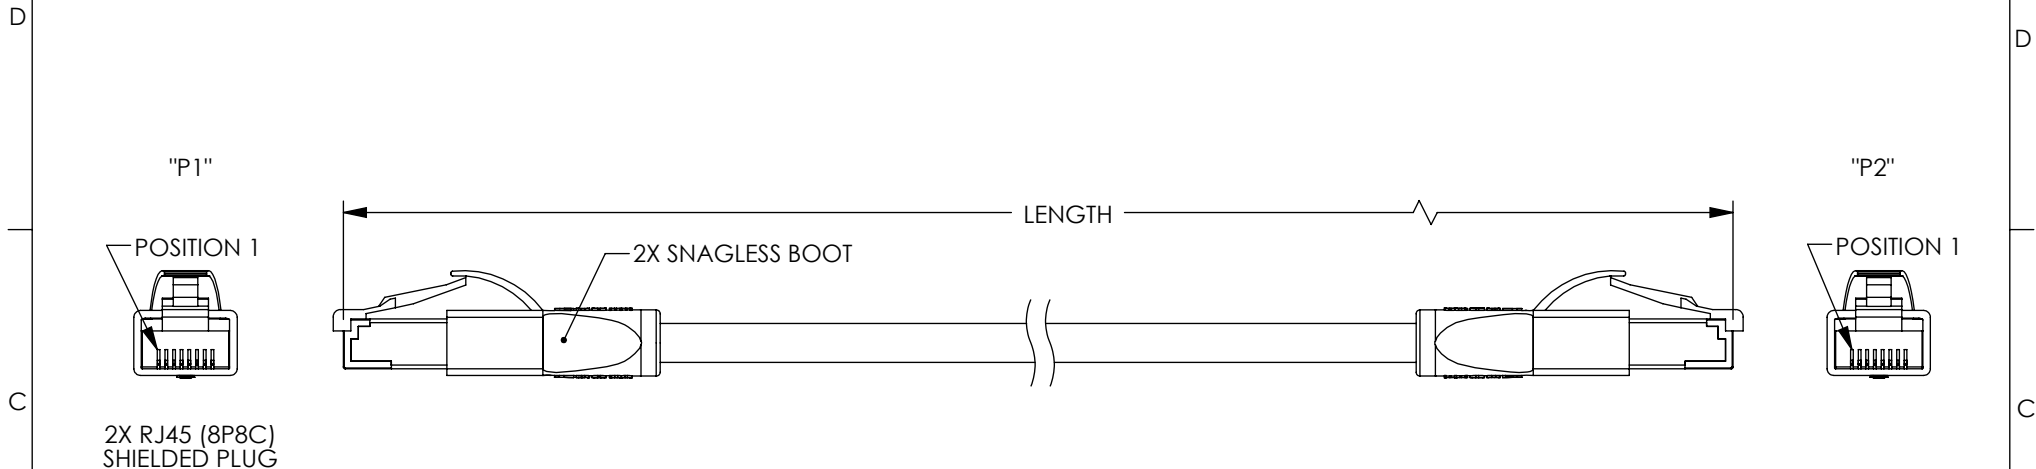

NOTES:

MATERIAL:

PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0
CONTACTS: PHOSPHOR BRONZE
CABLE JACKET: PVC, SEE CHARTS (SHEET 2 OF 2)
SNAGLESS BOOT: BLACK, LSZH THERMOPLASTIC

FINISH:

CONTACTS: 50 μ INCHES GOLD IN CONTACT AREA
OVER 100 μ INCHES NICKEL PLATE OVERALL.
PLUG SHIELDING: NICKEL PLATED

CABLE CHARACTERISTICS:

SHIELD: ALUMINUM/POLYESTER WITH DRAIN WIRE
FOUR TWISTED PAIR MODULAR CABLE, 26 AWG (7X34)
STRANDED COPPER; UL STYLE 2835 COMMUNICATIONS CABLE



ELECTRICAL:


NOMINAL IMPEDANCE: 100 Ω

MISCELLANEOUS:

PLUG CONFORMS TO TIA-1096
OPERATING TEMPERATURE RANGE: 0°C TO +60°C.
CABLES TO BE TESTED FOR CONTINUITY.
CABLES TO BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

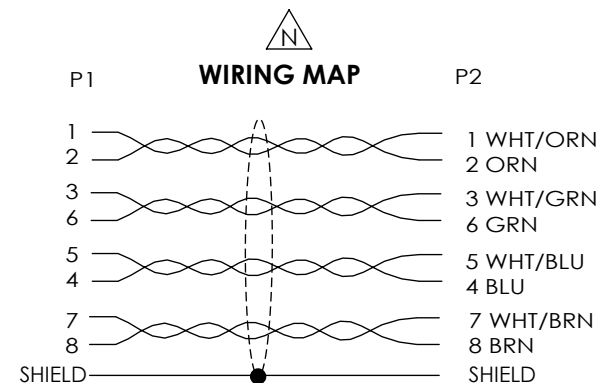

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 >12 [305] ≤ 60 [1524] = +2 [51] / -0 >60 [1524] ≤ 120 [3048] = +4 [102] / -0 >120 [3048] ≤ 300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = $\pm .2$ [5.08] .XX = $\pm .02$ [51] .XXX = $\pm .005$ [13]	APPROVALS	DATE	 50 HIGH STREET NORTH ANDOVER, MA 01845	
	DRAWN BY D. PARHAM	10/2/2000		
	CHECKED BY T. CLARK	10/3/2000	CATEGORY TELCOM/MODULAR	
	APPROVED BY R. CARRICK	10/03/2000	PRODUCT DESCRIPTION CBL RJ45/RJ45 CAT5e SHLD	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321
COLOR VARIATIONS MAY OCCUR		DWG. NO. TRD855SCR	REV. N	SCALE: NONE CAD FILE: TRD855SCR.SLDDRW SHEET 1 OF 2

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Cables / Networking Cables](#) ***category:***

Click to view products by [L-Com](#) ***manufacturer:***

Other Similar products are found below :

[73-7795-1](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [1-1997459-2](#) [1-1997459-3](#) [ASP-144414-04](#) [E16A06002M030](#) [18169-0524](#) [1969343-6](#)
[C5UMB3FBG](#) [21949-1](#) [360031](#) [AX100351](#) [09459711142](#) [73-7793-1](#) [WHU18-1836-060](#) [1-3636-620-5214](#) [STS](#) [09470303023](#) [09459711118](#)
[1404682](#) [C5SMB14FBG](#) [CA21116001](#) [WK-100](#) [UTPCH22VLY](#) [UTPSP50BLY](#) [C6F1106003](#) [UTPSP16MRDY](#) [UTPSP16MGRY](#)
[UTP28CH30MBL](#) [AX105520](#) [CAPFCU-B25](#) [CB8MMBK-B100](#) [DK-1511-002/B](#) [STP6X1BU](#) [904873-000](#) [17-103134](#) [1110401155](#)
[09459711186](#) [EL6614](#) [MRC191ZN79H1](#) [SSFPP-P03M0-2](#) [1426514](#) [1413684](#) [1426515](#) [1414043](#) [1413685](#) [7000-44511-6590150](#) [7000-](#)
[44511-7940300](#) [7000-44561-7940150](#)