


8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/16/09	D.GRIFFIN
B	ECN 5432: REMOVE "LOW SMOKE" FROM DESCRIPTN., UPDATE PACKAGING	4/7/11	D.FRISIELLO
C	ECN 8051: REVISED DRAIN WIRE NOTE TO BRAID, REVISE FORMAT, ROHS	8/17/15	D.FRISIELLO

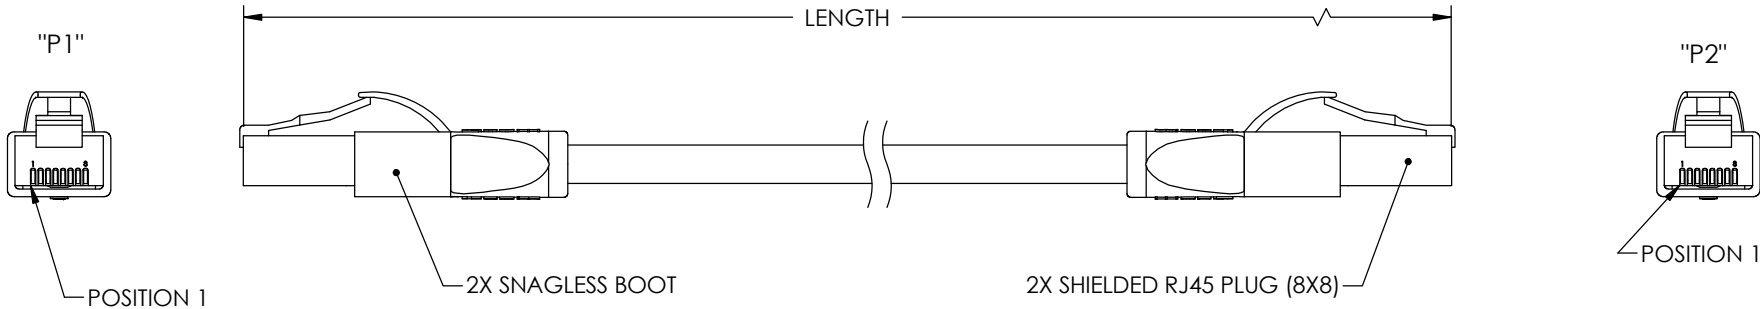

NOTES:

MATERIAL:
PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0
CONTACTS: PHOSPHOR BRONZE
CABLE JACKET: HIGH FLEX, OIL RESISTANT POLYURETHANE, ZERO HALOGEN, COLOR, TEAL.
PLUG SHIELDING: BRASS
SNAGLESS BOOT: LSZH, BLACK


FINISH:
CONTACTS: 50 μINCHES GOLD IN CONTACT AREA
OVER 100 μINCHES NICKEL PLATE OVERALL
PLUG SHIELDING: NICKEL PLATED

CABLE CHARACTERISTICS:
SHIELDED, FOUR TWISTED PAIR, CAT 5E MODULAR CABLE
CONDUCTORS: 26AWG STRANDED TINNED COPPER
OVERALL SHIELD: 38AWG TINNED COPPER BRAID OVER A SECOND SHIELD OF ALUMINUM/ POLYESTER FOIL

MISCELLANEOUS:
BRAID SHIELD TO BE TIED TO CONNECTOR SHELLS.
PLUG CONFORMS TO TIA-1096.
OPERATING TEMPERATURE RANGE: -40°C TO +75°C
CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
CABLE ASSEMBLY TO BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

PART NUMBER	LENGTH	
	FEET	METERS
TRD877HF-1	1.0	0.31
TRD877HF-2	2.0	0.61
TRD877HF-3	3.0	0.91
TRD877HF-5	5.0	1.52
TRD877HF-7	7.0	2.13
TRD877HF-10	10.0	3.05
TRD877HF-15	15.0	4.57
TRD877HF-25	25.0	7.62
TRD877HF-30	30.0	9.14
TRD877HF-50	50.0	15.24
TRD877HF-75	75.0	22.86
TRD877HF-100	100.0	30.48

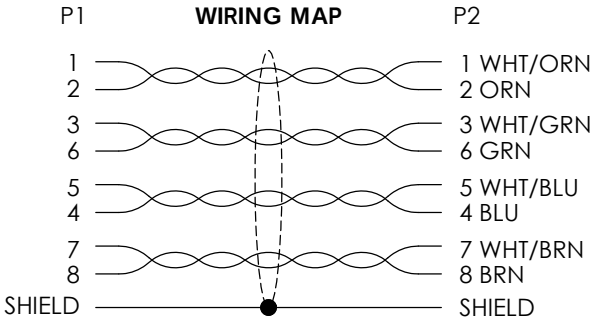

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: X = ± .2 [5.08] XX = ± .02 [5.1] XXX = ± .005 [1.3] PROJECTION 	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY D. CASTRO	12/15/09		
	CHECKED BY D. PARHAM	12/16/09	CATEGORY TELECOM/MODULAR	
	APPROVED BY P. MCNEIL	12/16/09	PRODUCT DESCRIPTION RJ45 C5E STP H-FX ZHAL TL	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321	DWG. NO. TRD877HF
COLOR VARIATIONS MAY OCCUR		SCALE: NONE	CAD FILE: TRD877HF.SLDDRW	REV. C
		SHEET 1 OF 1		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Cables / Networking Cables](#) ***category:***

Click to view products by [L-Com](#) ***manufacturer:***

Other Similar products are found below :

[73-7795-1](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [1-1997459-2](#) [1-1997459-3](#) [ASP-144414-04](#) [E16A06002M030](#) [18169-0524](#) [1969343-6](#)
[C5UMB3FBG](#) [21949-1](#) [360031](#) [AX100351](#) [09459711142](#) [73-7793-1](#) [WHU18-1836-060](#) [1-3636-620-5214](#) [STS](#) [09470303023](#) [09459711118](#)
[1404682](#) [C5SMB14FBG](#) [CA21116001](#) [WK-100](#) [UTPCH22VLY](#) [UTPSP50BLY](#) [C6F1106003](#) [UTPSP16MRDY](#) [UTPSP16MGRY](#)
[UTP28CH30MBL](#) [AX105520](#) [CAPFCU-B25](#) [CB8MMBK-B100](#) [DK-1511-002/B](#) [STP6X1BU](#) [904873-000](#) [17-103134](#) [1110401155](#)
[09459711186](#) [EL6614](#) [MRC191ZN79H1](#) [SSFPP-P03M0-2](#) [1426514](#) [1413684](#) [1426515](#) [1414043](#) [1413685](#) [7000-44511-6590150](#) [7000-](#)
[44511-7940300](#) [7000-44561-7940150](#)