


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/23/16	D.GRIFFIN
B	ECN 8810:CHANGED IP RATING TO IP67 , MOLDED HOOD ADD FOUR LOCATION HOLES	06/08/17	DCUI
C	ECN 11467: ADD 05M & 15M LENGTH TO TABLE AND FLEX LIFE TO ENVIRONMENTAL NOTE	10/28/21	GUTTADAURO

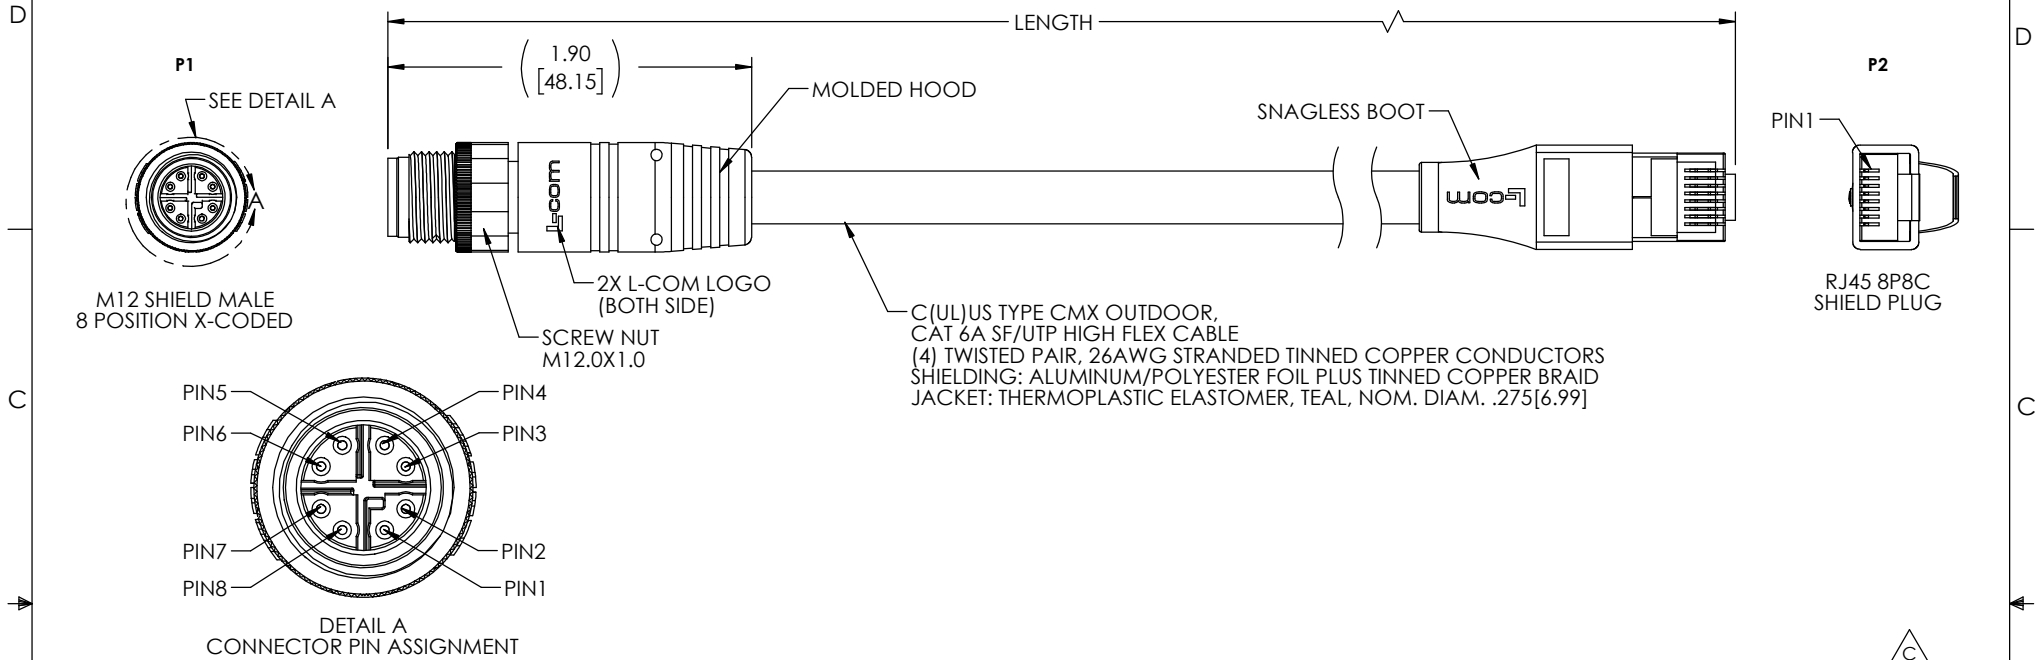

NOTES

MATERIAL:

MOLDED HOOD: THERMOPLASTIC POLYURETHANE, BLACK
INSULATOR: NYLON, BLACK
SHELL/SCREW NUT: BRASS ,NICKEL PLATE
M12 CONTACTS: PHOSPHOR BRONZE, 15µ" MIN. GOLD PLATE
SNAGLESS BOOT: LOW SMOKE ZERO HALOGEN, BLACK
RJ45 HOUSING: POLYCARBONATE, CLEAR UL96V-0
RJ45 SHIELD/STRAIN RELIEF: BRASS, 100µ" MIN. NICKEL PLATE
RJ45 CONTACTS: PHOSPHOR BRONZE , 50µ" MIN. GOLD PLATE IN CONTACT AREA OVER 100µ" MIN. NICKEL PLATE OVERALL

ELECTRICAL:

NOMINAL VOLTAGE RATING: 48 VAC/VDC
MAX CURRENT: 0.5A

APPLICATION:


INGRESS PROTECTION RATING IS IP67 (MATED ,P1 ONLY).

ENVIRONMENTAL:

OPERATING TEMPERATURE RANGE: -40°C TO +75°C
CABLE JACKET RESISTANCE: OIL, SUNLIGHT, AND WELD SPLATTER RESISTANT
CABLE FLEX LIFE: 1 MILLION CYCLE TEST (10X CABLE OD)
10 MILLION CYCLE TEST (20X CABLE OD)

MISCELLANEOUS

CABLE ASSEMBLIES TO BE TESTED FOR CONTINUITY
WIRED TO IEC 61076-2-109 STANDARDS
CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

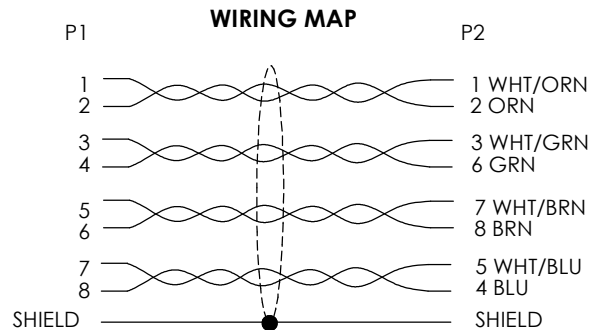

PART NUMBER	LENGTH	
	FEET	METERS
TRG610-T6T-05M	1.64	0.5
TRG610-T6T-1M	3.28	1.0
TRG610-T6T-2M	6.56	2.0
TRG610-T6T-3M	9.84	3.0
TRG610-T6T-5M	16.41	5.0
TRG610-T6T-10M	32.82	10.0
TRG610-T6T-15M	49.22	15.0

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS .XX = ± .02 [.5] ± 1/32 .XXX = ± .005 [.13] ANGLES ± 1° THIRD-ANGLE PROJECTION 	APPROVALS	DATE	 an INFINITI® brand 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	DRAWN BY DCUI	01/05/16	
	CHECKED BY D.DESJARDIN	03/10/16	
	APPROVED BY GUTTADAURO	03/10/16	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR REF	CATEGORY TELECOM/MODULAR		PRODUCT DESCRIPTION C6A M12MX-RJ45 TPE 26 TEL
	SIZE A	CAGE CODE 43321	
	SCALE: NONE	CAD FILE: TRG610-T6T.SLDDRW	
SHEET 1 OF 1		REV. C	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Cables / Networking Cables](#) ***category:***

Click to view products by [L-Com](#) ***manufacturer:***

Other Similar products are found below :

[73-7795-1](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [1-1997459-2](#) [1-1997459-3](#) [ASP-144414-04](#) [E16A06002M030](#) [18169-0524](#) [1969343-6](#)
[C5UMB3FBG](#) [21949-1](#) [360031](#) [AX100351](#) [09459711142](#) [73-7793-1](#) [WHU18-1836-060](#) [1-3636-620-5214](#) [STS](#) [09470303023](#) [09459711118](#)
[1404682](#) [C5SMB14FBG](#) [CA21116001](#) [WK-100](#) [UTPCH22VLY](#) [UTPSP50BLY](#) [C6F1106003](#) [UTPSP16MRDY](#) [UTPSP16MGRY](#)
[UTP28CH30MBL](#) [AX105520](#) [CAPFCU-B25](#) [CB8MMBK-B100](#) [DK-1511-002/B](#) [STP6X1BU](#) [904873-000](#) [17-103134](#) [1110401155](#)
[09459711186](#) [EL6614](#) [MRC191ZN79H1](#) [SSFPP-P03M0-2](#) [1426514](#) [1413684](#) [1426515](#) [1414043](#) [1413685](#) [7000-44511-6590150](#) [7000-](#)
[44511-7940300](#) [7000-44561-7940150](#)