


CUSTOMER :

CUSTOMER P/N:


PRODUCT DIMENSIONS

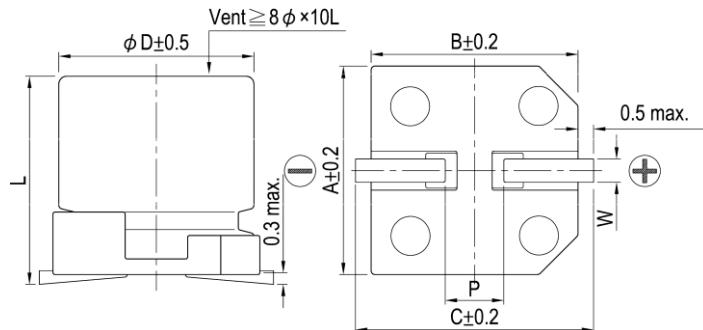

Unit: mm	
φD	10
L	12.5 ± 0.5
A	10.3
B	10.3
C	11.0
W	0.7~1.3
P	4.7 ± 0.2

Items	Performance																													
Rated Voltage V_R	35 V																													
Capacitance C_R	470 μ F (120 Hz, 20°C)																													
Category Temperature Range	-55°C ~ +105°C																													
Capacitance Tolerance	-20 % ~ +20 % (120 Hz, 20°C)																													
Surge Voltage V_S	40.3 V _{DC}																													
Leakage Current (20°C)	$I_{LEAK} \leq 165 \mu$ A After 2 minutes																													
Tan δ	≤ 0.13 (120 Hz, 20°C)																													
Impedance _{max.}	< 0.08 Ω (100k Hz, 20°C)																													
Ripple Current ($I_{AC, R}$ / rms)	780 mA (100k Hz, 105°C)																													
Low Temperature Characteristics at 120 Hz	<table border="1"> <tr> <td>Impedance ratio</td> <td>$Z_{(-25^\circ\text{C})} / Z_{(+20^\circ\text{C})}$</td> <td>2</td> </tr> <tr> <td></td> <td>$Z_{(-55^\circ\text{C})} / Z_{(+20^\circ\text{C})}$</td> <td>3</td> </tr> </table>					Impedance ratio	$Z_{(-25^\circ\text{C})} / Z_{(+20^\circ\text{C})}$	2		$Z_{(-55^\circ\text{C})} / Z_{(+20^\circ\text{C})}$	3																			
Impedance ratio	$Z_{(-25^\circ\text{C})} / Z_{(+20^\circ\text{C})}$	2																												
	$Z_{(-55^\circ\text{C})} / Z_{(+20^\circ\text{C})}$	3																												
Ripple Current (A) and Frequency Multipliers	<table border="1"> <tr> <td>Frequency (Hz)</td> <td>50,60</td> <td>120</td> <td>1k</td> <td>10k up</td> </tr> <tr> <td>Multiplier</td> <td>0.60</td> <td>0.70</td> <td>0.85</td> <td>1.0</td> </tr> </table>					Frequency (Hz)	50,60	120	1k	10k up	Multiplier	0.60	0.70	0.85	1.0															
Frequency (Hz)	50,60	120	1k	10k up																										
Multiplier	0.60	0.70	0.85	1.0																										
Endurance and Shelf Life Test	<table border="1"> <tr> <th>Items</th> <th>Endurance</th> <th colspan="3">Shelf Life Test</th> </tr> <tr> <td>Test Time</td> <td>5,000 Hrs at 105°C; V_R</td> <td colspan="3">1,000 Hrs at 105°C</td> </tr> <tr> <td>Cap. Change</td> <td>Within ±30 % of initial value</td> <td colspan="3">Within ±30 % of initial value</td> </tr> <tr> <td>Tan δ</td> <td>Less than 300% of specified value</td> <td colspan="3">Less than 300% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> <td colspan="3">Within specified value</td> </tr> </table>					Items	Endurance	Shelf Life Test			Test Time	5,000 Hrs at 105°C; V_R	1,000 Hrs at 105°C			Cap. Change	Within ±30 % of initial value	Within ±30 % of initial value			Tan δ	Less than 300% of specified value	Less than 300% of specified value			Leakage Current	Within specified value	Within specified value		
Items	Endurance	Shelf Life Test																												
Test Time	5,000 Hrs at 105°C; V_R	1,000 Hrs at 105°C																												
Cap. Change	Within ±30 % of initial value	Within ±30 % of initial value																												
Tan δ	Less than 300% of specified value	Less than 300% of specified value																												
Leakage Current	Within specified value	Within specified value																												
Standards	JIS C 5101-1, -18, IEC 60384-4																													
Remarks	RoHS Compliance, Halogen-free																													

Marking: Each capacitor shall be marked with the following information.

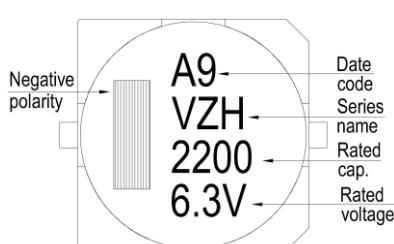

A 9 → January , 2019

The suffix of A. D. → Month of manufacture

Month	1	2	3	4	5	6
Code	A	B	C	D	E	F
Month	7	8	9	10	11	12
Code	G	H	I	J	K	L

Marking color: Black

* Please refer to "Precautions and Guidelines for Aluminum Electrolytic Capacitors" section in Lelon's catalog for further details.

Publication Date	March 20, 2019	Approval Signatures:	Approved	Checked	Designed
Revision Date					
Version No.	1		Please return one copy with your approval		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminium Electrolytic Capacitors - SMD category:

Click to view products by Lelon manufacturer:

Other Similar products are found below :

[EEV-FK1E332W](#) [ULV2H1R8MNL1GS](#) [MAL214099813E3](#) [CA025M4R70REB-0405](#) [HUB1800-S](#) [34610](#) [RYK-50V101MG5TT-FL](#)
[107AXZ016MQ5](#) [RVJ-50V101MH10U-R](#) [EMVH101GRA221MMN0S](#) [MAL214097402E3](#) [MAL215375471E3](#) [MAL224699909E3](#)
[MAL224699813E3](#) [MAL215099014E3](#) [MAL215099017E3](#) [MAL215099117E3](#) [MAL215099818E3](#) [AHC0609220M050R](#)
[AHC0609680M035R](#) [AEA1616471M063R](#) [AEA0810330M080R](#) [AEA1616152M025R](#) [AHA1012561M016R](#) [AHC0812470M080R](#)
[AHA0810560M040R](#) [AHC0609101M025R](#) [AEA1616151M100R](#) [AEA0810221M025R](#) [AEH1010331M025R](#) [AEA1616331M063R](#)
[AHC0609470M035R](#) [AHC1012471M025R](#) [AEA1213101M080R](#) [AEA1010221M050R](#) [AHC1012221M035R](#) [AEH1213471M025R](#)
[AEA1010221M035R](#) [AHC0811221M025R](#) [AEA1010681M010R](#) [AEA1010470M080R](#) [AHC0609150M063R](#) [AEA0810101M050R](#)
[AEH10104R7M250R](#) [AEH1216331M050R](#) [AEA1616222M025R](#) [AEH1010470M080R](#) [AEA0810560M050R](#) [AEA1213680M100R](#)
[AEH0810101M035R](#)