

RoHS

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃

Contact Material:Brass

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard:PA6T

Max.Processing Temp: 230℃ for 30-60 seconds

(260℃ for 10 seconds)

2.54xNo.of Positions+0.4±0.3

2.54x(N-1)Pin±0.15


2.54±0.1

2P 4P

1P 3P

5.0±0.15

2.54±0.1

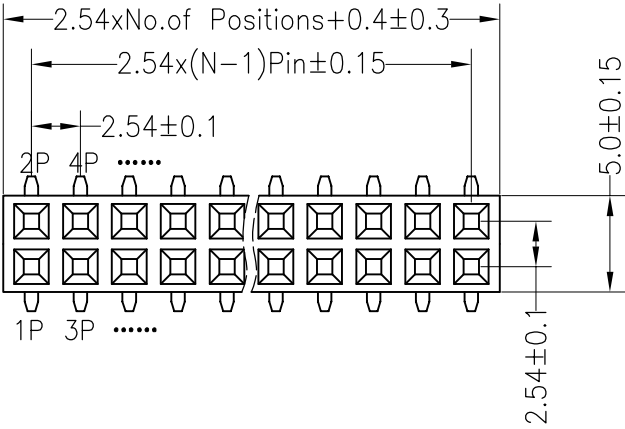


2.54

1.02

3.3

8.0

2.54x(N-1)pin

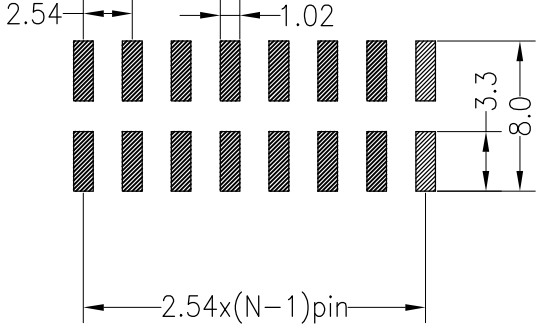


8.5±0.15

9.00±0.25


7.1±0.25

PIN 0.50X0.25

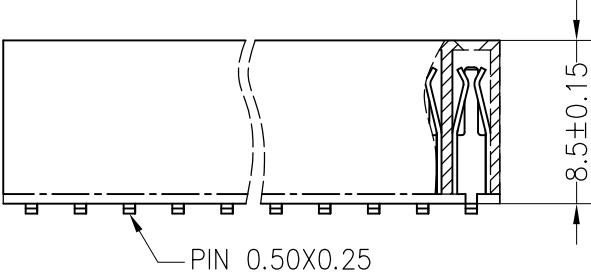

9.00±0.25

7.1±0.25



Dimension antitheses list

ITEM	PB	PC	PW	H	W
001	9.0		7.1	8.5	5.0
002					

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

深圳市连盛精密连接器有限公司

PART NO.

1020300870

TITLE:

2.54FH H=8.5 W=5.0 2*21P SMT=7.1 总高9.0

U-A型 AU1U 青铜 PA6T

1

2

3

4

5

6

7

8

9

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) ***category:***

Click to view products by [Liansheng](#) ***manufacturer:***

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-4007](#) [641938-9](#) [65692-001LF](#) [65781-018](#) [65781-047](#) [65817-010LF](#) [67095-007LF](#)
[67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#)
[8-1437020-4](#) [819-22-004-30-001101](#)