

RoHS

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃

Contact Material:Brass



Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA9T



Max.Processing Temp: 230℃ for 30-60 seconds
(260℃ for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

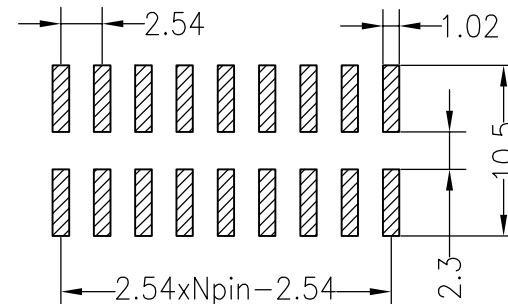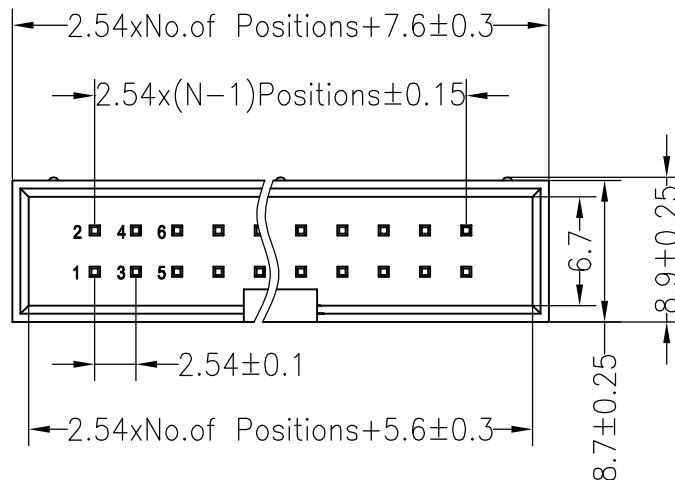

Ordering Information

J	3	016	3	00	9	1	5	0408
产品类型 J=筒牛	间距 3=2.54	总pin数 2-100P	产品形态 3=SMT	电镀厚度 SN=镀锡 00=常规 01=1u" 02=2u" 03=3u"	塑胶材料 9=PA9T	塑胶材料 1=黑色 2=灰色 3=白色 4=蓝色 5=红色 6=黄色 7=灰白色	包装方式 1=管装 2=卷装 3=盒装 4=袋装 5=盒装	序列号

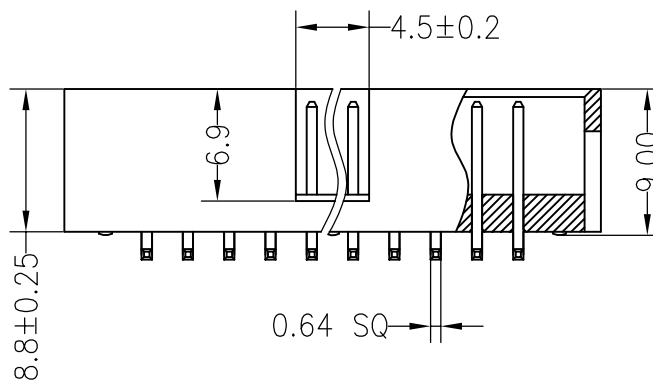

深圳市连盛精密连接器有限公司

OPERATION

DRAW

SCALE

FIT

X.X

±0.30

UNIT

mm

X.XX

±0.20

CHECK

SIZE

A4

X.XXX

±0.10

APPROVE

SHEET

1/1

Angle

±3°

PROJ.

1/1

DIM

TOL

1/1

1/1

PART NO.

1030300265

TITLE:

2.54BOX 16P H=8.8 SMT=9.5 总高10.5
L=12.7 AU0.6U PA9T 黑色

1

2

3

4

5

6

7

8

9

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) ***category:***

Click to view products by [Liansheng](#) ***manufacturer:***

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)