



CSE-SGAM-ccc-SGAM

SMA Plug to SMA Plug Cable Assembly

The CSE-SGAM-ccc-SGAM cable assembly provides SMA plug (male pin) connection with the option of 152 mm, 305 mm or 610 mm (6 in, 12 in, 24 in) lengths of RG-316/U coaxial cable.

Operating from 0 Hz to 8 GHz, the CSE-SGAM-ccc-SGAM cable assembly combines superior performance, compact size, and convenient threaded mating interfaces to provide a reliable, easy-to-use connector. Additionally, all Linx coaxial cables and connectors meet RoHS lead free standards and are tested to meet requirements for corrosion resistance, vibration, mechanical and thermal shock.

FEATURES

- 0 Hz to 8 GHz operation
- RG-316/U 50 Ω coaxial cable
- SMA plug (male pin)
 - Gold plating

APPLICATIONS

- LPWA
 - LoRaWAN®, Sigfox®, WiFi HaLow™ (802.11ah)
- Cellular IoT - LTE-M (Cat-M1), NB-IoT
- Cellular - 5G/4G LTE/3G/2G
- PC, LAN
- ISM - Bluetooth®, ZigBee®
- GNSS - GPS, Galileo, BeiDou, QZSS
- Automotive, Industrial, Commercial, Enterprise

TABLE 1. ELECTRICAL SPECIFICATIONS

Parameter	Value		
Coax Cable Length	152 mm	305 mm	610 mm
Insertion Loss (dB max)	0.85	1.12	2.13
VSWR (max)	1.5	1.4	1.3
Impedance	50 Ω		
Insulation Resistance	500 MΩ min.		

ORDERING INFORMATION

Part Number	Description
CSE-SGAM-152-SGAM	SMA plug (male pin) to SMA plug (male pin) on 152 mm (6 in) of RG-316/U coaxial cable
CSE-SGAM-305-SGAM	SMA plug (male pin) to SMA plug (male pin) on 305 mm (12 in) of RG-316/U coaxial cable
CSE-SGAM-610-SGAM	SMA plug (male pin) to SMA plug (male pin) on 610 mm (24 in) of RG-316/U coaxial cable

Available from Linx Technologies and select distributors and representatives.

PRODUCT DIMENSIONS

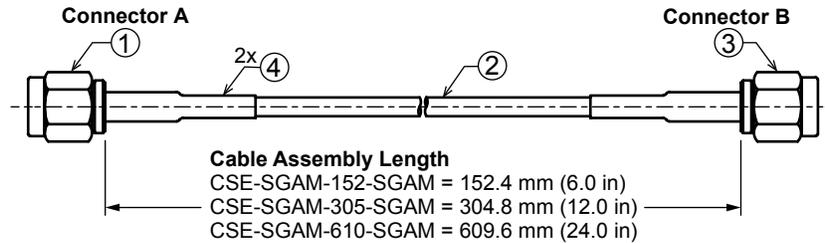


Figure 1. Product Dimensions for the CSE-SGAM-ccc-SGAM Cable Assembly

TABLE 2. CABLE ASSEMBLY COMPONENTS

Item #	Description	Material	Finish
1	Connector, SMA plug (male pin)	Brass	Gold
2	RG-316/U coaxial cable	RG-316/U	-
3	Connector, SMA plug (male pin)	Brass	Gold
4	Heat Shrink Tubing	PTFE	Black

TABLE 3. CABLE ASSEMBLY MECHANICAL SPECIFICATIONS

Parameter	Connector A SMA Plug (male pin)	Connector B SMA Plug (male pin)
Fastening Type	1/4"-36UNS-2B threaded coupling	1/4"-36UNS-2B threaded coupling
Recommended Torque	0.9 N m (8.0 in lbs)	0.9 N m (8.0 in lbs)
Coupling Nut Retention	60 lbs. min.	60 lbs. min.
Connector Durability	500 cycles min.	500 cycles min.
Weight	CSE-SGAM-152-SGAM = 8.4 g (0.30 oz) CSE-SGAM-305-SGAM = 10.7 g (0.38 oz) CSE-SGAM-610-SGAM = 15.1 g (0.53 oz)	

COAXIAL CABLE SPECIFICATIONS

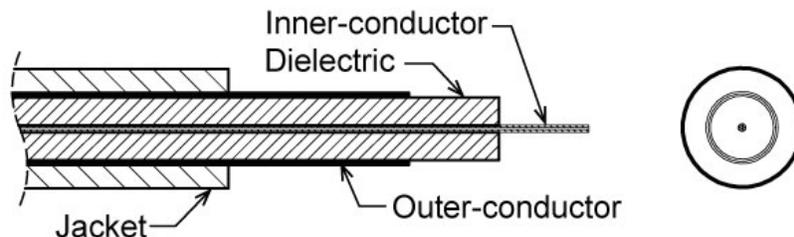


Figure 2. Coaxial Cable Cutaway Diagram

TABLE 4. COAXIAL CABLE MATERIAL SPECIFICATIONS FOR RG-316/U

Parameter	Material	Dimensions
Inner-Conductor	Copper plated steel, 7 strand, 0.175 mm/conductor	Ø0.53 mm (0.020 in)
Dielectric	PTFE	Ø1.53 mm (0.06 in)
Outer-Conductor	Silver plated copper braid, Coverage 92.3%	Ø1.71 mm (0.067 in)
Jacket	FEP	Ø2.53 mm (0.100 in)

TABLE 5. COAXIAL CABLE ELECTRICAL AND PHYSICAL SPECIFICATIONS FOR RG-316/U

Parameter	Value		
Rated Temp Voltage	105 °C 30 V		
Conductor Resistance	281 Ω/km 20 °C		
Insulation Resistance	3000 M Ω-km min.		
Dielectric Strength	AC 1000 V/Minute		
Spark Test	2.0 kV		
Insulation	Unaged	Tensile Strength	2500 psi min. (1.76 kg/mm ²)
		Elongation	200% min.
	Aged	Tensile Strength	Unaged min. 75% (168 hrs x 232 °C)
		Elongation	Unaged min. 75% (168 hrs x 232 °C)
Jacket	Unaged	Tensile Strength	2500 psi min. (1.76 kg/mm ²)
		Elongation	200% min.
	Aged	Tensile Strength	Unaged min. 75% (168 hrs x 232 °C)
		Elongation	Unaged min. 75% (168 hrs x 232 °C)
Nominal Impedance	50 ± 3 Ω		
Nominal Capacitance	95.8 pF/m		
Nominal Velocity of Propagation	69.5%		
VSWR (0 to 6 GHz)	≤ 1.3		
Minimum Inside Bend radius	25.4 mm (1.0 in)		

CABLE ASSEMBLY PERFORMANCE

Table 6 shows insertion loss and VSWR values for the CSE-SGAM-ccc-SGAM cable assemblies at commonly used frequencies.

Insertion loss is the loss of signal power (gain) resulting from the insertion of a device in a transmission line. VSWR describes how efficiently power is transmitted through the cable assembly. A lower VSWR value indicates better performance at a given frequency.

Band	Low-Band Cellular/ ISM/LPWA	GNSS	Midband Cellular	WiFi/ISM
Frequency Range	400 MHz to 960 MHz	1.164 GHz to 5 GHz	2.4 GHz	5 GHz to 7.125 GHz
CSE-SGAM-152-SGAM				
Insertion Loss (dB max)	0.16	0.43	0.29	0.84
VSWR (max)	1.0	1.1	1.0	1.4
CSE-SGAM-305-SGAM				
Insertion Loss (dB max)	0.28	0.74	0.48	1.12
VSWR (max)	1.0	1.2	1.1	1.3
CSE-SGAM-610-SGAM				
Insertion Loss (dB max)	0.53	1.40	0.91	2.02
VSWR (max)	1.0	1.1	1.1	1.2

PACKAGING INFORMATION

The CSE-SGAM-ccc-SGFB cable assembly is packaged in a clear plastic bag, in quantities of 50. Distribution channels may offer alternative packaging options.

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE Connectivity, TE, TE connectivity (logo), Linx and Linx Technologies are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warranted to exceed one (1) year from the original date of the end product purchase.

©2022 TE Connectivity. All Rights Reserved.

10/22 Original

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Linx Technologies](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [73-6364-6](#) [MDM-21SH011F](#) [R285001001](#) [R288940004](#) [145111-05-12.00](#) [1661-C-24](#) [24P104C24J1-012](#)
[24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-003](#) [PTWY-24-78](#)
[R285001021](#) [R285426000](#) [R288940003](#) [R288940008](#) [R288940034](#) [MDM-21PH006P-A174](#) [4814-BB-24](#) [5260-72](#) [DLP-COAX1](#) [4814-K-48](#)
[115101-09-06.00](#) [MXHT83QE3000](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#) [R284C0351060](#) [R288940009](#)
[R284C0351028](#) [R288940002](#) [MDM-15SH006A](#) [73-6353-10](#) [R285020301W](#) [BNC TO SMA Cable](#) [MIKROE-274](#) [Minibend-10](#) [Microbend](#)
[MTR-11](#) [PT815NN](#) [MF53/1x8A_21MXP/11SK/305](#) [Minibend-3](#) [Minibend-6.5](#)