



The graphic consists of several overlapping squares in various colors: orange, green, blue, purple, and red. They are arranged to form a stylized letter 'C' shape, with some squares extending beyond the main cluster.

**Photocoupler  
Product Data Sheet  
LTV-176G**

Spec No. :DS70-2018-0128  
Effective Date: 09/26/2018  
Revision: -

**LITE-ON DCC**  
**RELEASE**

BNS-OD-FC001/A4

# Photocoupler LTV-176G series

## 1. DESCRIPTION

The LITEON LTV-176G consists of an aluminum gallium arsenide infrared emitting diode optically coupled to a photo-MOSFET in a SOP4 package, which is suitable for surface mount assembly. The LTV-176G is suitable for the battery management systems which require space savings.


### 1.1 Features

- Normally open (1-form-A)
- Operating temperature range: 110°C(max)
- Trigger LED current: 3 mA (max)
- Isolation voltage: 3750 Vrms (min)
- OFF-state output terminal voltage : 400V (min)
- ON-state current : 120mA (max)
- ON-state resistance : 35Ω (max)
- Safety standards

UL1577

VDE DIN EN60747-5-5 (VDE 0884-5)

### 1.2 Functional Diagram

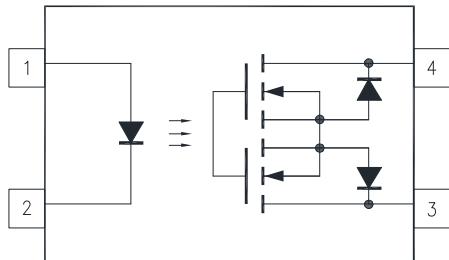

1. Anode      3. Drain  
2. Cathode      4. Drain


### 1.3 Applications

- Battery Management System (BMS)
- Factory Automation (FA)
- Security Systems
- Measuring Instruments
- Smart Meters
- Mechanical relay replacements

## Photocoupler LTV-176G series

## 2. PACKAGE DIMENSIONS

### 2.1 LTV-176G series

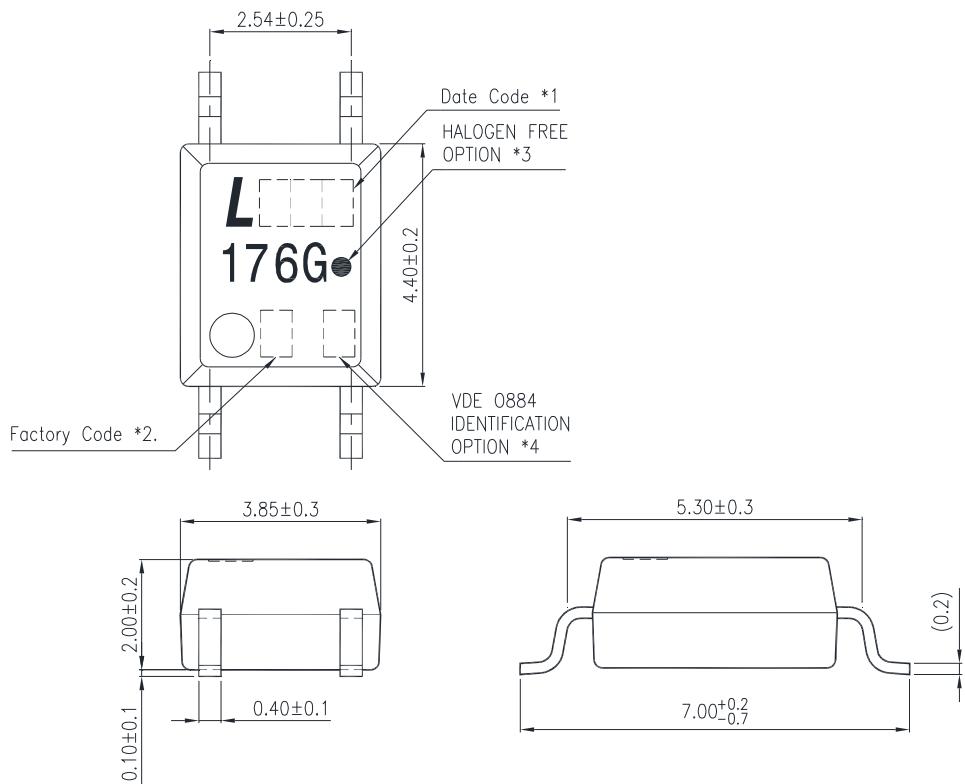


#### Notes:

1. 1-digit year code, Example : 2010 = A  
2-digit work week ranging from '01' to '53'
2. Factory identification mark shall be marked (W: China -CZ, X: China -TJ)
3. “●” indicates halogen free option.
4. “4”or“V” for VDE option.


# Photocoupler LTV-176G series

### 3. TAPING DIMENSIONS

#### 3.1 LTV-176G-TP

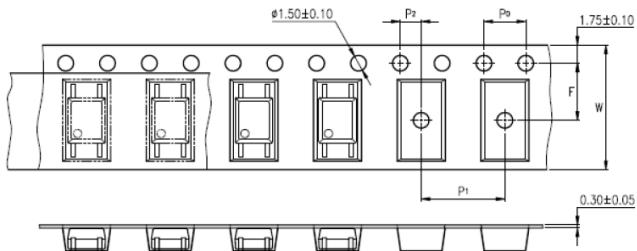

#### 3.2 LTV-176G

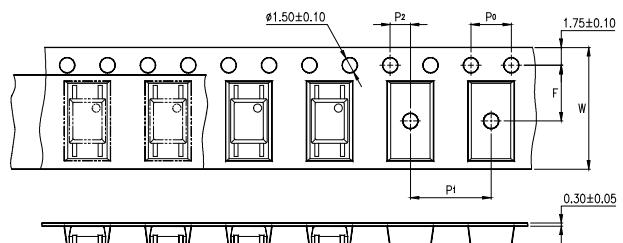

Description	Symbol	Dimension in mm (inch)
Tape wide	W	12±0.3 (0.472)
Pitch of sprocket holes	$P_0$	4±0.1 (0.157)
Distance of compartment	F	5.5±0.1 (0.217)
	$P_2$	2±0.1 (0.079)
Distance of compartment to compartment	$P_1$	8±0.1 (0.315)

#### 3.3 Quantities Per Reel

Package Type	LTV-176G Series
Quantities (pcs)	3000

# Photocoupler LTV-176G series

## 4. RATING AND CHARACTERISTICS

### 4.1 Absolute Maximum Ratings at Ta=25°C

	Parameter	Symbol	Rating	Unit
Input	Forward Current	I <sub>F</sub>	50	mA
	Forward Current Derating (T <sub>A</sub> ≥ 25 °C)	Δ I <sub>F</sub> /°C	-0.5	mA/°C
	Peak Forward Current ( 100μs pulse, 100pps )	I <sub>FP</sub>	1	A
	Reverse Voltage	V <sub>R</sub>	6	V
	Input Power Dissipation	P <sub>D</sub>	70	mW
	Junction Temperature	T <sub>J</sub>	125	°C
Output	OFF-State Output Terminal Voltage	V <sub>OFF</sub>	400	V
	ON-State Current	I <sub>ON</sub>	120	mA
	ON-State Current Derating (T <sub>A</sub> ≥ 25 °C)	Δ I <sub>ON</sub> /°C	-1.1	mA/°C
	Output Power dissipation	P <sub>O</sub>	350	mW
	Isolation Voltage (Note 1.)	V <sub>iso</sub>	3750	V
	Operating Temperature	T <sub>opr</sub>	-40 ~ +110	°C
	Storage Temperature	T <sub>stg</sub>	-55 ~ +125	°C
	Soldering Temperature	T <sub>sol</sub>	260 (For 10 seconds)	°C

### 4.2 RECOMMENDED OPERATING CONDITIONS (Note)

Characteristics	Symbol	Min.	Typ.	Max.	Unit
Supply Voltage	V <sub>DD</sub>	-	-	320	V
Forward Current	I <sub>F</sub>	5	7.5	25	mA
On-state Current	I <sub>ON</sub>	-	-	120	
Operating Temperature	T <sub>opr</sub>	-20	-	100	°C

Note : The recommended operating conditions are given as a design guide necessary to obtain the intended performance of the device. Each parameter is an independent value. When creating a system design using this device, the electrical characteristics specified in this datasheet should also be considered.

## Photocoupler LTV-176G series


### 4.3 ELECTRICAL OPTICAL CHARACTERISTICS at Ta=25°C

Parameter		Sym bol	Min.	Typ.	Max.	Unit	Test Condition
Input	Forward Voltage	V <sub>F</sub>	1.0	1.18	1.3	V	I <sub>F</sub> =10mA
	Reverse Current	I <sub>R</sub>	-	-	10	µA	V <sub>R</sub> =5V
Out -put	OFF-State Current	I <sub>OFF</sub>	-	-	1	µA	V <sub>OFF</sub> =400V
Coupled	Trigger LED Current	I <sub>FT</sub>	-	0.8	3	mA	I <sub>ON</sub> =120mA
	Return LED Current	I <sub>FC</sub>	0.1	-	-	mA	I <sub>OFF</sub> =100µA
	On Resistance	R <sub>on</sub>	-	16	35	Ω	I <sub>F</sub> =5mA, I <sub>ON</sub> = 120mA
Transfer characteristics	Turn on time (Note 2.)	T <sub>on</sub>	-	0.3	1	ms	R <sub>L</sub> =200Ω, V <sub>DD</sub> =20V I <sub>F</sub> =5mA
	Turn off time (Note 2.)	T <sub>off</sub>	-	0.1	1	ms	
	Isolation Resistance	R <sub>iso</sub>	5×10 <sup>10</sup>	-	-	Ω	DC500V, R.H.40 ~ 60%

Note :

- AC For 1 Minute, R.H. = 40 ~ 60%. Isolation voltage shall be measured using the following method.
  - Short between anode and cathode on the primary side and between collector and emitter on the secondary side.
  - The isolation voltage tester with zero-cross circuit shall be used.
  - The waveform of applied voltage shall be a sine wave.

#### 2. Turn on / turn off time

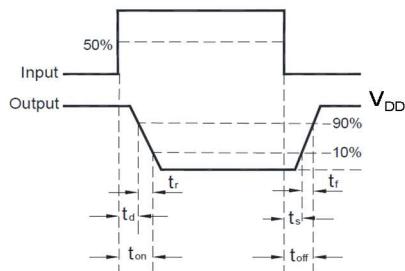

## Photocoupler LTV-176G series

### 5. CHARACTERISTICS CURVES

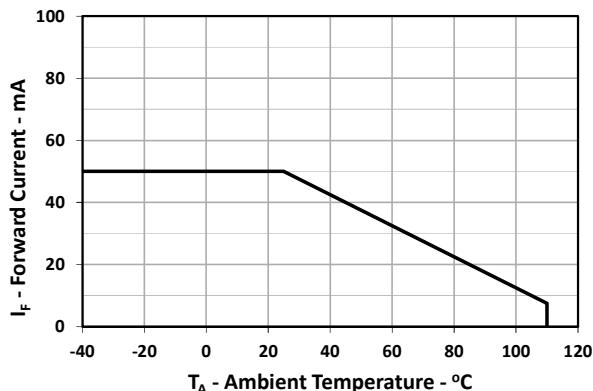


Fig. 1-1 Forward Current vs. Ambient Temperature

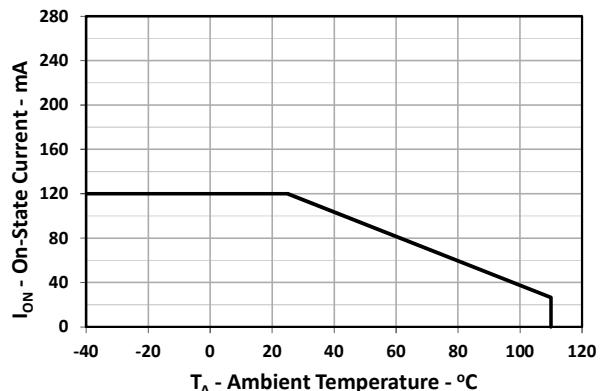


Fig. 1-2 On-State Current vs. Ambient Temperature

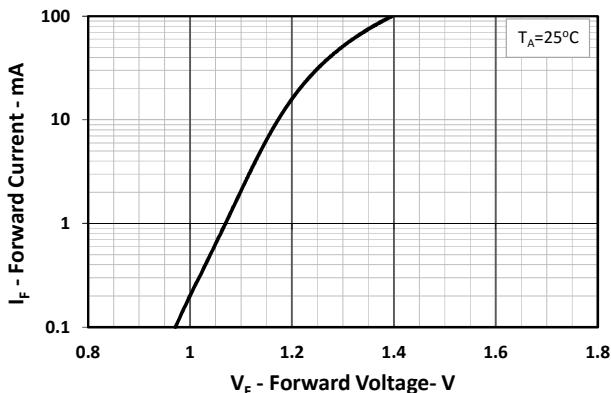


Fig. 2 Forward Current vs. Forward Voltage

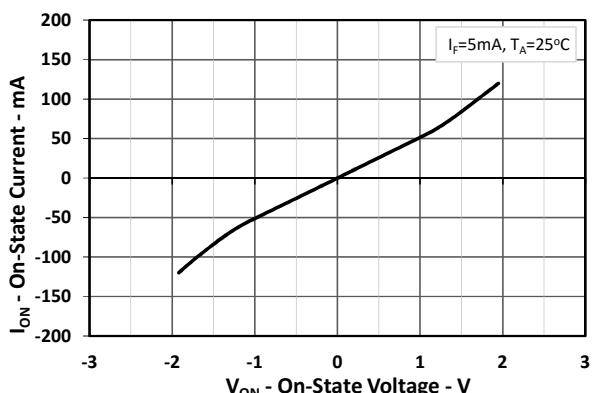


Fig. 3 On-State Current vs. On-State Voltage

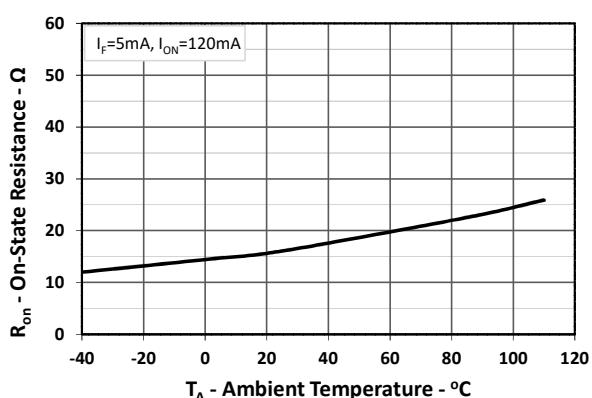


Fig. 4 On-State Resistance vs. Ambient Temperature

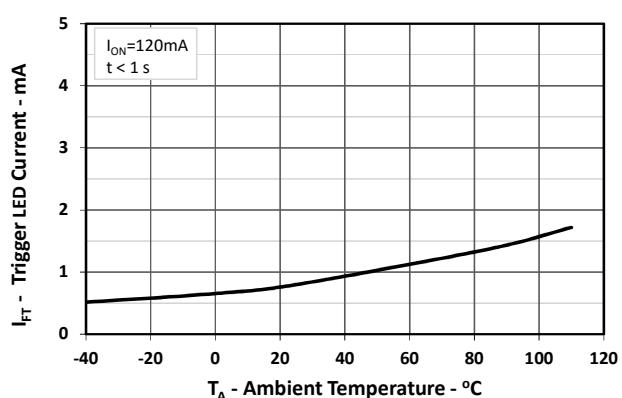


Fig. 5 Trigger LED Current vs. Ambient Temperature

## Photocoupler LTV-176G series

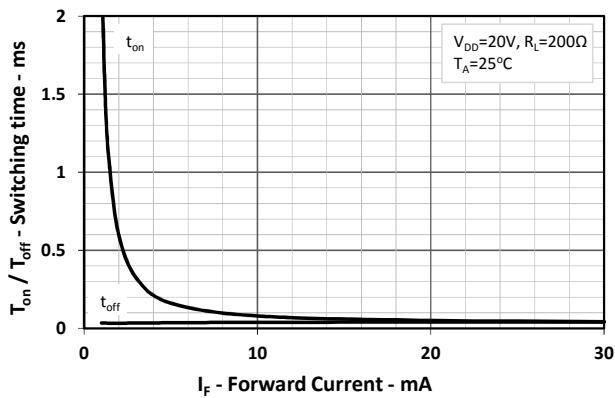


Fig. 6 Switching time vs. Forward Current

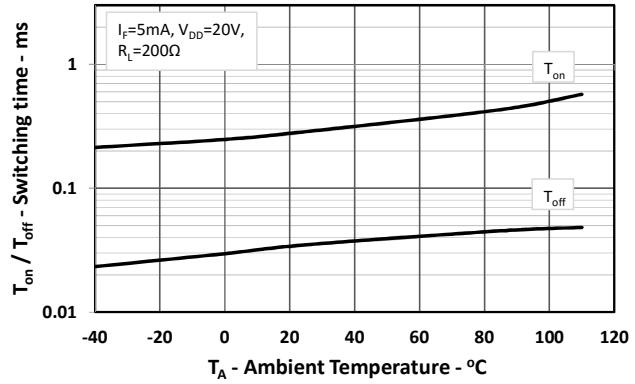


Fig. 7 Switching time vs. Ambient Temperature

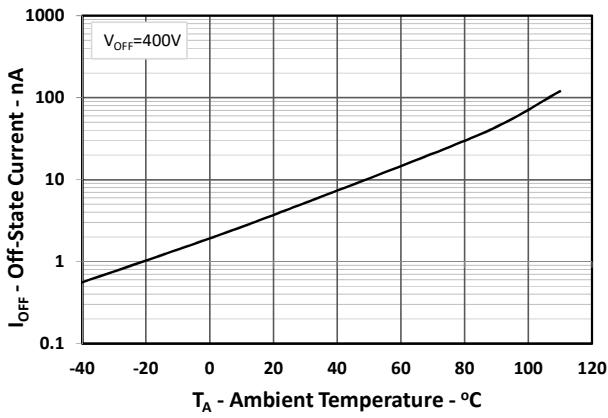


Fig. 8 Off-State Current vs. Ambient Temperature


# Photocoupler LTV-176G series

## 6. TEMPERATURE PROFILE OF SOLDERING

### 6.1 IR Reflow soldering (JEDEC-STD-020E compliant)

One time soldering reflow is recommended within the condition of temperature and time profile shown below. Do not solder more than twice

Profile item	Conditions
Preheat	
- Temperature Min ( $T_{Smin}$ )	150°C
- Temperature Max ( $T_{Smax}$ )	200°C
- Time (min to max) ( $t_s$ )	90±30 sec
Soldering zone	
- Temperature ( $T_L$ )	217°C
- Time ( $t_L$ )	60 sec
Peak Temperature ( $T_P$ )	260°C
Ramp-up rate	3°C / sec max.
Ramp-down rate	3~6°C / sec

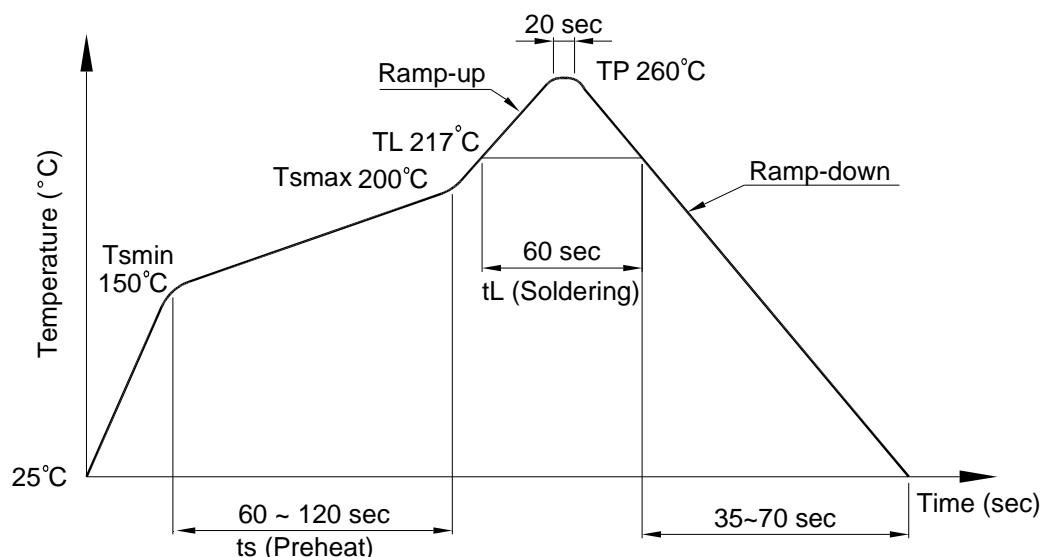

## Photocoupler LTV-176G series

### 6.2 Wave soldering (JEDEC22A111 compliant)


One time soldering is recommended within the condition of temperature.

Temperature: 260+0/-5°C

Time: 10 sec.

Preheat temperature: 25 to 140°C

Preheat time: 30 to 80 sec.

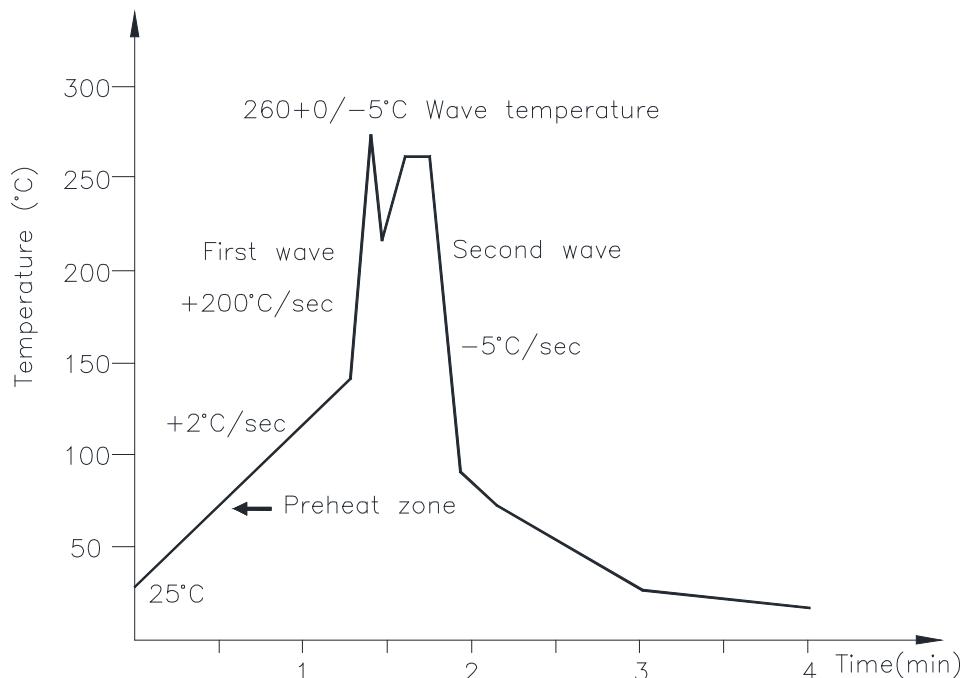

### 6.3 Hand soldering by soldering iron

Allow single lead soldering in every single process. One time soldering is recommended.

Temperature: 380+0/-5°C

Time: 3 sec max.

## 7. NAMING RULE

**LTV-176G-(1)-G**

DEVICE PART NUMBER

- (1) TAPING TYPE (TP, no suffix) \_\_\_\_\_  
 LTV-176G has tape and reel solution.  
 Please refer to orientation of taping on Page.3
- (2) Halogen free option \_\_\_\_\_

Example : LTV-176G-TP-G

**LTV176G(1)-V-G**

DEVICE PART NUMBER

- (1) TAPING TYPE (TP, no suffix) \_\_\_\_\_  
 LTV-176G has tape and reel solution.  
 Please refer to orientation of taping on Page.3
- (2) VDE option \_\_\_\_\_
- (3) Halogen free option \_\_\_\_\_

Example : LTV176GTP-V-G

## 8. NOTES

- LiteOn is continually improving the quality, reliability, function or design and LiteOn reserves the right to make changes without further notices.
- The products shown in this publication are designed for the general use in electronic applications such as office automation equipment, communications devices, audio/visual equipment, electrical application and instrumentation.
- For equipment/devices where high reliability or safety is required, such as space applications, nuclear power control equipment, medical equipment, etc, please contact our sales representatives.
- When requiring a device for any "specific" application, please contact our sales in advice.
- If there are any questions about the contents of this publication, please contact us at your convenience.
- The contents described herein are subject to change without prior notice.
- Immerge unit's body in solder paste is not recommended.

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Photodiode Output Optocouplers category:***

***Click to view products by Lite-On manufacturer:***

Other Similar products are found below :

[TLP590B\(C,F\)](#) [TLP7820\(A-LF4.E\(O](#) [LTV-244-GB-G](#) [LTV2301GB-V-G](#) [EL816S1\(C\)\(TU\)](#) [EL817S1\(C\)\(TU\)-VG](#) [GX357NC](#) [PC817B](#)  
[PC817C](#) [LTV-341W-TA1-H](#) [LTV-176G](#) [LTV-1003-TP1-G](#) [LTV-247-G-RT](#) [PC817B-MS](#) [FOC-817C-F](#) [CYPS2501-1\(K\)](#)  
[CYTLP2362\(TPD2\)](#) [OR-3H7C-TP-G-\(GK\)](#) [ORPC-817MC-F](#) [ORPC-817D-C](#) [ORPC-817SB-TP-F](#) [PS2801C-4-F3-A/M](#) [PC817B](#)  
[TLP183\(YH-TPL,E\(T](#) [TLP183\(GRH-TPL,E\(T](#) [TLP183\(TPL,E\(T](#) [TLP291\(BL-TP,SE\(T](#) [TLP184\(V4GBTL,SE\(T](#) [TLP785\(BLL-TP6,F\(C](#)  
[TLP293\(GRH-TPL,E\(T](#) [TLP383\(D4GL-TR,E](#) [TLP185\(BLL-TL,SE\(T](#) [TLP2309\(TPL,E\(O](#) [TLP785\(BL-TP6,F\(C](#) [TLP185\(GRL-TL,SE\(T](#)  
[TLP785\(GR-TP6,F\(C](#) [TLP183\(BL-TPL,E\(T](#) [TLP2398\(TPL,E\(T](#) [TLP127GB-S](#) [LTV-354T-A\(UMW\)](#) [6N136S\(UMW\)](#) [PC817B-S](#) [FOC-817C](#)  
[EL1018](#) [IS121A](#) [IS2701-1A](#) [IS3H7A](#) [IS121D](#) [IS2701-1C](#) [IS121GB](#)