

Blade Fuse Holders - FKH Stackable Fuse Holder for ATO® Style Blade Fuse Rated 58V

RoHS



Specifications



Housing + Adapter: Out of thermoplastic (UL 94-V0, heat-resistant)
Connections: Leaf spring connector systems, soldering terminals (4 pins each), copper alloy, tinned
Color: Black
Packaging:

| Series | Pack Size |
|---------------|-----------|
| 178.4250.xxx2 | 1000 |
| 178.4252.xxx2 | 1000 |
| 178.6116.xxx1 | 200 |
| 178.6116.xxx2 | 1000 |
| 178.619x.xxx1 | 100 |

Fuse Holder for 42V PowerNet with coding for TAC fuses-links. Attachable in X - direction. Rated voltage 58V; crimp terminals.

Sicherungshalter für 42V PowerNet, mit Kodierung für TAC-Sicherungen. Montage in X-Richtung. Nennspannung 58V, Crimp-Kontakte.

Dimensions in mm / Maße in mm

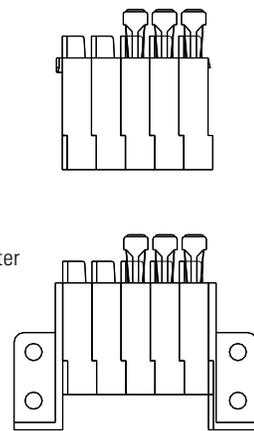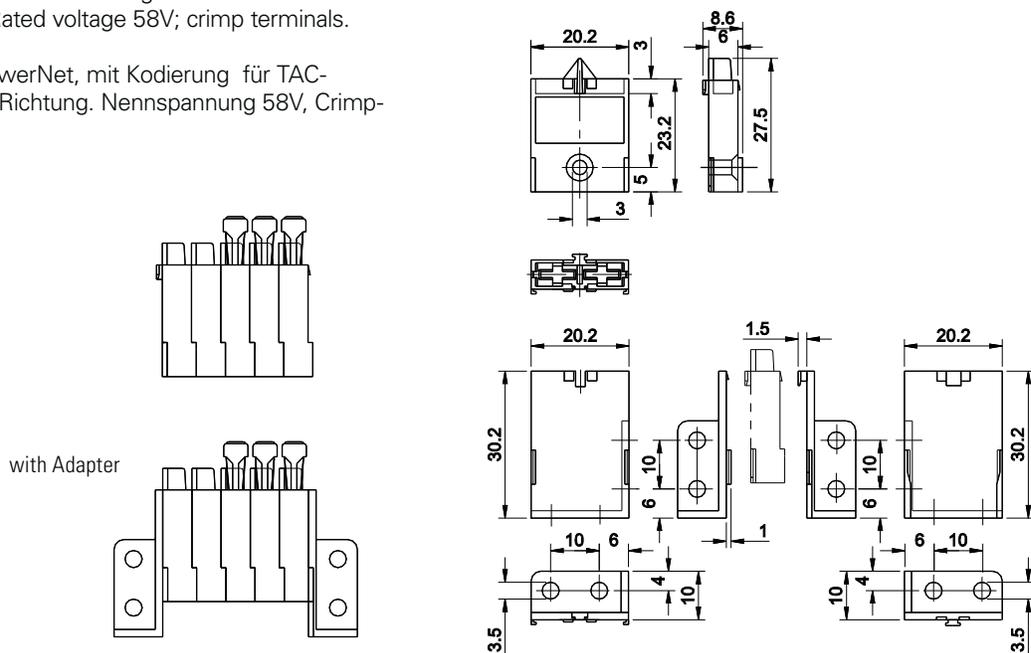

Fuse Holders

| Part Number Artikel-Nr. | Description Beschreibung | Contact Temperature Kontakttemperatur |
|----------------------------|---------------------------------------|--|
| 178.4252.000_ | Complete with Housing and 2 Terminals | max. 130°C |
| 178.4250.000_ | Housing | - |
| 178.6116.250_ | Contacts 1.5 - 2.5 mm ² | max. 130°C |
| 178.6191.000_ | Adapter right | - |
| 178.6192.000_ | Adapter left | - |

Corresponding fuse links see Section "Blade Fuses."

This FKH 58V Fuse Holder can be mounted in row in any number. The fixing adapters are not included in the Fuse Holder. Please order the adapter separately.

Blade Fuseholders - FKH Stackable Fuseholder for ATO® Style Blade Fuse Rated 80V

RoHS





Specifications

Housing + Adapter: Out of thermoplastic (UL 94-V0, heat-resistant)
Connections: Leaf spring connector systems, soldering terminals, copper alloy, tinned
Color: Black

Dimensions in mm / Maße in mm

Fuseholder for ATO / FKS size fuses-links. Attachable in X - direction. Rated voltage 80V; crimp terminals.

Sicherungshalter für Sicherungen in ATO / FKS-Größe. Montage in X-Richtung. Nennspannung 80V, Crimp-Kontakte.

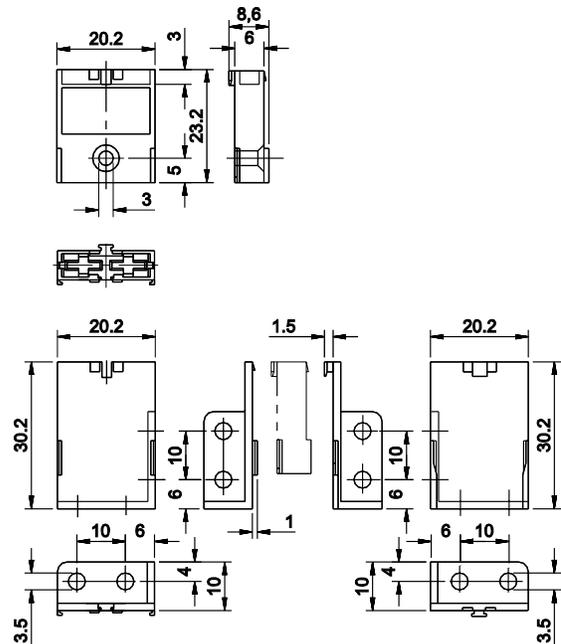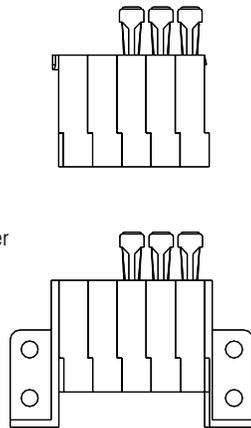

| Part Number Artikel-Nr. | Description Beschreibung | Contact Temperature Kontakttemperatur |
|----------------------------|---|--|
| 178.6152.000_ | Complete | max. 130°C |
| 178.6150.000_ | Housing | - |
| 178.6116.250_ | Complete with 1.5 - 2.5 mm ² | max. 130°C |
| 178.6152.250_ | With 200 mm wiring loop | - |
| 178.6191.000_ | Adapter right | - |
| 178.6192.000_ | Adapter left | - |


Last figure of part number = packaging code, see Section "Packaging Index," pg. 157.

Corresponding fuse links see Section "Blade Fuses."

This FKH-Fuseholder can be mounted in row in any number. The fixing adapters are not included in the fuseholder. Please order the adapter separately.

Blade Fuse Holders - FKH Fuse Holder with 90° connection for ATO® Style Blade Fuse Rated 80V

RoHS

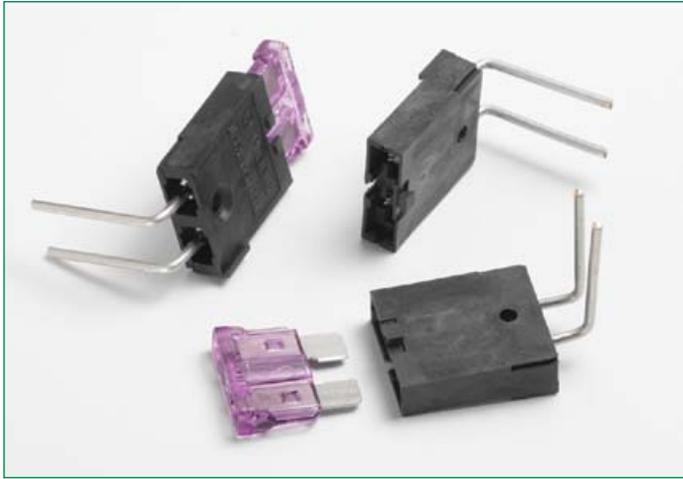

Specifications


- Housing:** Out of thermoplastic (UL 94-V0, heat-resistant)
- Connections:** Leaf spring connector systems, soldering contacts (2 pins), copper alloy, tinned
- Color:** Black
- Packaging:**

| Series | Pack Size |
|---------------|-----------|
| 178.7017.xxx1 | 100 |

Fuse Holder for ATO® / FKS size fuses-links. 90° bended solderable tin plated contacts. Rated voltage 80V.

Sicherungshalter für Sicherungen in ATO® / FKS-Größe. 90°-gewinkelte, verzinnnte Lötanschlüsse. Nennspannung 80V.

Dimensions in mm / Maße in mm

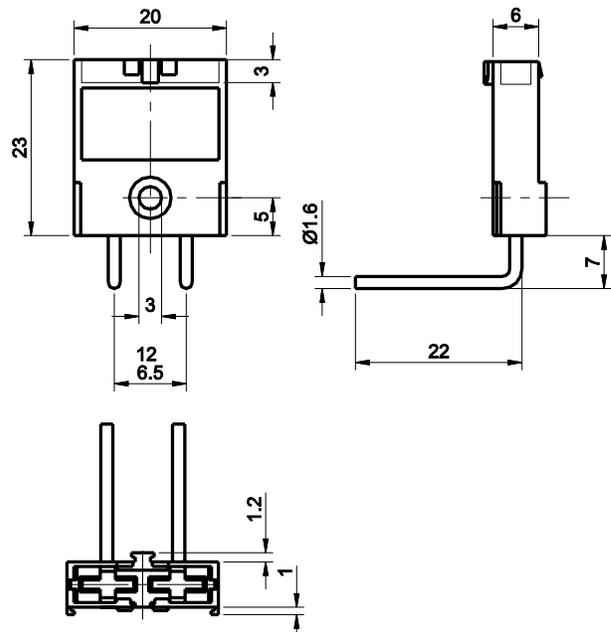

| Part Number Artikel-Nr. | Description Beschreibung | Contact Temperature Kontakttemperatur |
|----------------------------|-----------------------------|--|
| 178.7017.0001 | Complete | max. 130°C |

Corresponding fuse links see Section "Blade Fuses."

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fuse Holder](#) category:

Click to view products by [Littelfuse](#) manufacturer:

Other Similar products are found below :

[570-290-741P40](#) [570-290-751P40](#) [020417G](#) [020418E](#) [6R30A1B](#) [F600A3B](#) [80910030](#) [8601.2020](#) [G15A2SPQ](#) [9-3557-GP REV A](#) [HDJ-B](#)
[R6J30A3S](#) [HFH-1](#) [RF30A2B](#) [RF30A3SP](#) [15600-08-10](#) [BK/FHN19G](#) [BK/HHM](#) [BK/HKP-CCHH](#) [BK/HKP-JJ](#) [BK/HTJ-LES-FUSE](#) [HMG-](#)
[241](#) [HTJ-LES-FUSE](#) [C4044-1](#) [2086-1](#) [2193](#) [2602](#) [2650](#) [178.000100](#) [FHN31G1](#) [T30A2B](#) [G4PB8](#) [2660](#) [2799](#) [CQ-209V](#) [HKP-CCHH](#)
[R6F30A2S](#) [341001A](#) [345621A](#) [CVRMCC](#) [4202](#) [4407](#) [4408](#) [4413](#) [4423](#) [4532](#) [4537](#) [TSD1404-12](#) [BK/FHN31G1](#) [BK/HC-5](#)