

59150 Flange Mount Sensor

Flange Mounting Sensor



Description

The 59150 is a flange mounting reed sensor 28.57mm x 19.05 mm x 6.35mm (1.125" x 0.750" x 0.250") with a choice of normally open, normally open high voltage, normally closed or changeover contacts. The wires exit from the left-hand side, see Drawing 2. It is also available with right-hand exit - see 59145 series. The 59150 series is capable of switching up to 265Vac/300Vdc at 10VA. It is well suited for use in a wide range of industrial appliances, or IoT proximity sensing applications.

The 59150 functions best with the matching actuator 57150-000.

Features and Benefits

- Non-contact switching solution for wet & harsh environments
- Housing design for optimum adjustability
- Available in select sensitivities (operating distances)
- Standard cable configurations; customization options available
- Hermetically sealed, IP67 rated; UL and REACH compliant
- No leakage current in 'open' state-ideal for battery powered IoT applications
- Can operate through non-ferrous materials (for example, wood, plastic or aluminum)
- Helps implement efficient proximity/access and energy management systems
- Compact size and easy installation and effective concealment in many applications
- UL Recognized per UL 508 and CSA C22.2 No. 14.

Additional Information



Resources



Accessories






Samples

Dimensions

Dimensions in mm (inch)

Tolerances are +/- 0.25 (0.010) Unless otherwise noted.
(Actuator sold separately)

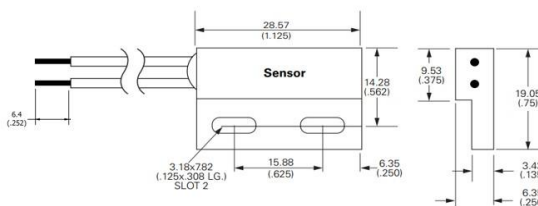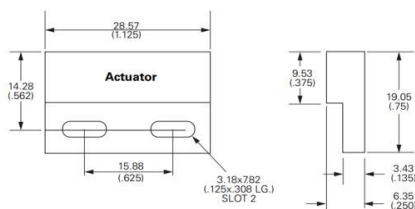

Applications

- Security and access control
- Factory automation
- Process equipment
- Major appliances
- Small appliances
- Proximity and limit sensing

Agency Approvals

Agency	Agency File Number
	E61760

Note: Contact Littelfuse for specific agency approval ratings.

Schematics	Switch Type
	1 and 2
	3
	4

59150 Flange Mount Sensor

Flange Mounting Sensor

Electrical Ratings

Contact Type			Normally Open	Normally Open High Voltage	Change Over	Normally Closed
Switch Type			1	2	3	4
Contact Rating ¹		VA/Watt - max.	10	10	5	5
Voltage ⁴	Switching ²	Vdc - max.	200	300	175	175
	Breakdown ³	Vac - max.	140	265	120	120
		Vdc - min.	250	400	200	200
Current ⁴	Switching ²	Adc - max.	0.5	0.4	0.25	0.25
	Carry	Aac - max.	0.35	0.30	0.18	0.18
		Adc - max.	1.2	1.4	1.5	1.5
Resistance ⁵	Contact, Initial Insulation	Ω - max.	0.2	0.2	0.2	0.2
		Ω - min.	10 ¹⁰	10 ¹⁰	10 ⁹	10 ⁹
Capacitance	Contact	pF - typ.	0.3	0.2	0.3	0.3
Temperature	Operating	°C (PVC Wire)	-40 to +105	-20 to +105	-40 to +105	-40 to +105
		°C (2-C Cable)	-20 to + 80	-20 to + 80	—	-20 to + 80

Product Characteristics

Operate Time ⁶		ms - max.	1.0	1.0	3.0	3.0
Release Time ⁶		ms - max.	1.0	1.0	3.0	3.0
Shock ⁷	11ms 1/2 sine	G - max.	100	100	50	50
Vibration ⁷	50-2000 Hz	G - max.	30	30	30	30

Notes:


- Contact rating - Product of the switching voltage and current should never exceed the wattage rating. Contact Littelfuse for additional load/life information.
- When switching inductive and/or capacitive loads, the effects of transient voltages and/or currents should be considered. Refer to Application Notes AN108A and AN107 for details.
- Breakdown Voltage - per MIL-STD-202, Method 301.
- Electrical Load Life Expectancy - Contact Littelfuse with voltage, current values along with type of load.
- This resistance value is for 300 mm wire length. Resistance changes with lead length.
- Operate (including bounce)/Release Time - per EIA/NARM RS-421-A, diode suppressed coil (Coil II).
- Shock and Vibration - per EIA/NARM RS-421-A and MIL-STD-202.
- For custom modifications to the lead length or size, or adding a special connector, please contact Littelfuse.

Sensitivity Options (Using 57150 Actuator)

Select Option	S			T			U			V		
Switch Type	Pull-In AT Range (mm)	Activation Distance (mm) Min.	Deactivation Distance (mm) Max.	Pull-In AT Range (mm)	Activation Distance (mm) Min.	Deactivation Distance (mm) Max.	Pull-In AT Range (mm)	Activation Distance (mm) Min.	Deactivation Distance (mm) Max.	Pull-In AT Range (mm)	Activation Distance (mm) Min.	Deactivation Distance (mm) Max.
1 Normally Open	12-18	8.2	22.5	17-23	7.2	20.5	22-28	6.4	19.5	27-33	5.7	20.5
2 High Voltage	-	-	-	17-23	7.2	20.5	22-28	6.3	20.5	27-33	5.7	20.5
3 Change Over	15-20	7.5	18.5	20-25	6.3	17	-	-	-	-	-	-
4 Normally Closed	15-20	7.5	18.5	20-25	6.3	17	-	-	-	-	-	-

Note:

- Pull-In AT Range: These AT values are the bare reed switch AT before modification.
- The activation distance is average value on the final sensor assembly.



59150 Flange Mount Sensor

Flange Mounting Sensor

Lead Wire Length & Specification

Wire Leads: 24 AWG 7/32 PVC 105°C UL1430/UL1569		
or 2-C Cable leads: 26 AWG 80°C UL 2464		
Select Option	Lead Length mm (inch)	
02	Wire	300±10.00 (11.81±0.394)
05	Wire	1000±10.00 (39.37±0.394)
12	2-C Cable	300±20.00 (11.81±0.394)
15	2-C Cable	1000±20.00 (39.37±0.394)

Termination Specification

Termination Detail		
Select Option	Description	
	Stripped & Tinned Lead Detail	
A	Tinned Leads 6.4±0.76 mm (0.252±0.03 inch)	

Material Specifications

	Housing Material	Color	Sealing Component
57150 Actuator	20% GF P.B. T	Black	Epoxy
59150 Sensor	20% GF P.B. T	Black	Epoxy

Packaging

Lead Length	Packaging Option	Quantity
2/12	Bulk	500
5/15	Bulk	500


Recommended Fastener for Sensor¹

Series	Fastener	Type	Torque
Metric	M3	Screw with washer	1.0 N-m
Standard	#4 (7/64")	Screw with washer	8.85 in-lbf


Note: 1. Sensor Housing may be secured using mechanical fasteners, M3 or #4 Screws (Torque to 1 N-m (8.9 in-lbf)), or suitable adhesive tape material. Please note that you must use a suitable washer with the mechanical fastener. Fastener material should be non-magnetic stainless steel or brass.

Part Numbering System

Sensor: **59150 - X - X - XX - X**

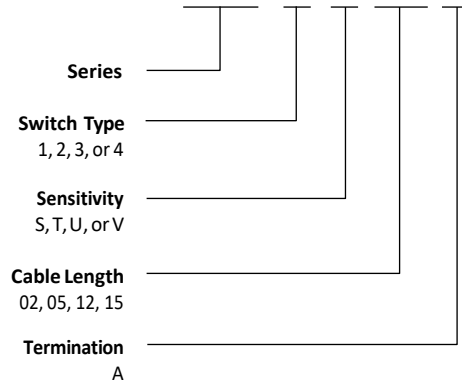

Actuator: **57150 - 000**



Note: The 57150 Actuator is sold separately.

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Proximity Sensors](#) *category:*

Click to view products by [Littelfuse](#) *manufacturer:*

Other Similar products are found below :

[8027AL20NL2CPXX](#) [922AA2W-A9P-L](#) [GL-12F-C2.5X10\(LOT3\)](#) [972AB3XM-A3P-L](#) [980659-1](#) [E2E-X14MD1-G](#) [E2E-X2D1-G](#) [E2E-X4MD1-G](#) [E2E-X5E1-5M-N](#) [EI3010TBOP](#) [MS605AU](#) [EP175-32000](#) [IFRM06P1703/S35L](#) [ILFK12E9189/I02](#) [ILFK12E9193/I02](#) [922AA2XM-B9P-L](#) [922FS0.8-H4P-G-020](#) [SC606ABV0S30](#) [SM552A100](#) [SM851A1200FP](#) [F3S-A162-U](#) [QT-08L](#) [RDS-DIN3-PA-D1](#) [TL-X10F1-G](#) [TL-X5Y1-52](#) [IA12ASF04DOM1](#) [IFFK12P1501/L](#) [IFRM08N1503/S35L](#) [IFRM08N1701/S35L](#) [Y92E-P1D2H5](#) [DR10GTI](#) [DSM2C550](#) [ZS-2065](#) [E2E-X3D1-G](#) [E2QN15E3](#) [EI0801PPOS](#) [TL-X10MF2](#) [SGA8072](#) [SM552A173](#) [E2KC25MY1812M](#) [AIK18F05AN024-2M](#) [SM952A123000](#) [SM850A2400FP](#) [SM956A410002](#) [EI8040NACP](#) [SM801A1200](#) [AC441A](#) [AC441AUS](#) [DCB1C425](#) [DCB3N250](#)