


MITI-7L

Long life > High Reliability > 7mm > Sub-miniature

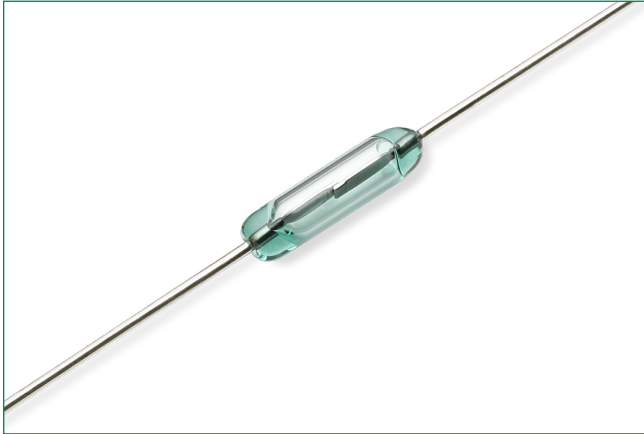

Description

The MITI-7L ultra-miniature reed switch is a normally open switch with a 7mm x 1.8mm (0.276" x 0.071") glass envelope, which is capable of switching 170 Vdc at 10W. It has a sensitivity range of 6–25 AT. It has a high insulation resistance of 10^{11} Ohms minimum and low contact resistance of less than 150 milliohms.

The MITI-7L is also available in a surface mount version, that is, MISM-7L.

Features & Benefits

- Long life and high reliability
7 mm switch
- Capable of switching 170 Vdc or 0.25 A at up to 10 W
- Available sensitivity range
6–25 AT
- Hermetically sealed switch contacts are not affected by and have no effect on their external environment
- Very low space requirement
- Zero operating power required for contact closure
- Excellent for switching micro-controller logic level loads
- RoHS Compliant

Additional Information



Resources




Accessories



Samples

Dimensions

Dimensions in mm (inch)

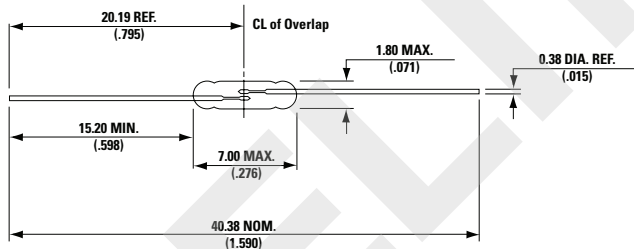

Applications

- Reed Relay particularly for Automatic Test Equipment (ATE) application that requires 7 mm long life switch
- Appliance applications that require long life and high reliability switch
- Position Sensing

Agency Approvals

Agency	Agency File Number	Ampere-Turns Range
	E47258	6–25 AT

Note: Contact Littelfuse for specific agency approval ratings.

Switch Type

Contact Form	A (SPST-NO)
Materials	Body: Glass Leads: Tin Plated Nickel Iron

Note: SPST-NO = Single-pole, single-throw, normally open

Electrical Ratings

Contact Rating ¹	-	Watt - max.	10
Voltage ³	Switching ²	Vdc - max.	170
	Breakdown ⁴	Vac - max.	120
		Vdc - min.	175
Current ³	Switching ²	Adc - max.	0.25
		Aac - max.	0.18
	Carry	Adc - max.	0.30
		Aac rms - max	0.21
Resistance	Contact, Initial	Ω - max.	0.15
	Insulation	Ω - min.	10^{11}
Capacitance	Contact	pF - typ.	0.65
Temperature	Operating	°C	-40 to +125
	Storage ⁵	°C	-65 to +125

Notes:

1. Contact rating - Product of the switching voltage and current should never exceed the wattage rating. Contact Littelfuse for additional load/life information.
2. When switching inductive and/or capacitive loads, the effects of transient voltages and/or currents should be considered. Refer to Application Notes AN108A and AN107 for details.
3. Electrical Load Life Expectancy - Contact Littelfuse with voltage, current values along with type of load.
4. Breakdown Voltage - per MIL-STD-202, Method 301.
5. Storage Temperature - Long time exposure at elevated temperature may degrade solderability of the leads.

MITI-7L

Long life > High Reliability > 7mm > Sub-miniature

Product Characteristics


Operating Characteristics		
Operate Time ¹	-	0.3 ms - max.
Release Time ¹	-	0.3 ms - max.
Shock ²	11ms 1/2 sine wave	100 G - max.
Vibration ²	50–2000 Hertz	30 G - max.
Resonant Frequency	-	12.7 kHz - typ.

Magnetic Characteristics		
Pull-In Range ³	Ampere Turns	6–25
Rating Sensitivity ⁴	Ampere Turns	11
Test Coil	-	L4991

Notes:

1. Operate (including bounce)/Release Time - per EIA/NARM RS-421-A, diode suppressed coil (Coil I).
2. Shock and Vibration - per EIA/NARM RS-421-A and MIL-STD-202.
3. Pull-In Range - Contact Littelfuse for narrower AT ranges available.
4. Rating Sensitivity - The value at which contact ratings and operating characteristics are determined. Derating may be required below this value.
5. Custom modifications of forming and/or cutting of reed switches are available. Please contact Littelfuse.

Drop-Out vs. Pull-In Chart

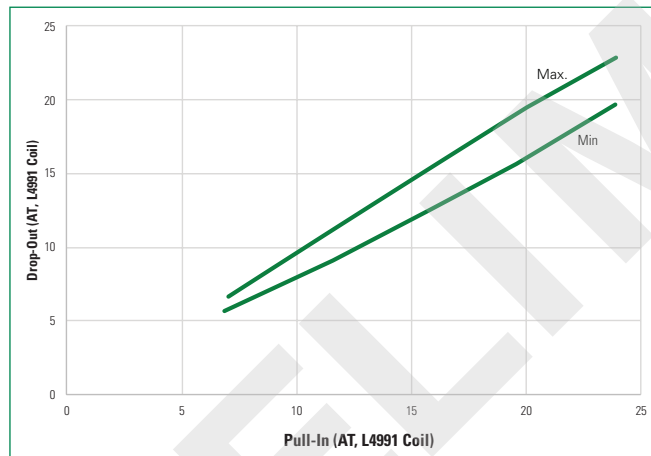

Note: The chart represents the range of Drop-Out, minimum to maximum for a given Pull-In value.

Part Numbering System

MITI-7L-6-10

Series

AT Range

6–10 AT

10–15 AT

20–25 AT

Example: 6-10 AT product is MITI-7L-6-10

Packaging

Packaging Option	Packaging Specification	Quantity	Quantity & Packaging Code	Taping Width
Bulk	Bulk	1000	N/A	N/A

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Magnetic/Reed Switches](#) category:

Click to view products by [Littelfuse](#) manufacturer:

Other Similar products are found below :

[AMS-20MG](#) [AMS-37-G_W/Brk](#) [AMS-38S-I](#) [AMS-39B-W](#) [AMS-10S-B](#) [AMS-25A-I](#) [AMS-38MG](#) [AMS-38SB](#) [AMS-9-B](#) [AMS-T10C\(B\)](#)
[505-171W WHITE](#) [505-211B](#) [505-391G](#) [505-70B](#) [507-382B](#) [BMC-33B](#) [505-101BC](#) [505-101-GC](#) [505-101-WS](#) [505-201W](#) [505-5114B](#)
[BROWN](#) [505-90G](#) [505-90I](#) [507-381BB](#) [TSW-2T](#) [AMS-10MGW](#) [631.4212.695](#) [631.4226.700](#) [630.5121.064](#) [SW GP100/10-15 AT](#) [PSW-21-](#)
[I 4360005](#) [NRC-22-I](#) [KSK-1A66-2030](#) [44531-0200](#) [44531-0260](#) [44531-0710](#) [MK28-1A-500W](#) [MK28-1B-500W](#) [511-59A](#) [35-756](#)
[D40MLCBLM1210M](#) [D40MLCBLM125M](#) [D40PMPC2105R](#) [D40PSPC2105](#) [KSK-1A52-1520](#) [KSK-1A87-2025](#) [KSK-1C90U-1530](#) [KSK-](#)
[1E661-BV14501](#) [KSK-1E85-BV470](#)