


# HWB12 SEALED POWER DISTRIBUTION MODULE

## Compact Hard-Wired PDM for 280 Style Components





### **Description**

The HWB12 Compact Hard-Wired Box features 12 cavities that accept 2.8mm fuse and relay components and is the perfect fit for accessory circuits and overflow circuits from your main Power Distribution module. The HWB12 can hold plug-in components including MINI fuses, MINI format circuit breakers, 4-pin single throw relays, and 5-pin double throw relays. The HWB12 features durable construction, an IP67/IP69K rating, and a compact size. The user can customize their own circuitry utilizing direct wire-to-component connections which are crimped to the wire harness with grommets to seal the bottom of the module.

#### **Features and Benefits**

- AssureLatch<sup>TM</sup> yellow positive-sealing latches keep the cover securely in place while allowing for fast service.
- Accepts any MINI (280 style) fuses, circuit breakers or relays.
- Compact size allows the unit to be installed in vehicles with limited space.
- Ideal for accessory circuits, overflow circuits from main
- IP67/IP69K sealed units can be installed virtually anywhere on the vehicle and stands up to road splash and salt spray.
- TPAs (terminal position assurance locks) give secondary locking protection of the wire leads, which help keeps leads securely in place.
- Wires plug into the back of the unit using industrystandard TE Connectivity MCP terminals.
- Tethers available to prevent loss of cover during service.
- Optional foam on inside cover available; functions as relay retention insert
- HWB18, HWB12 & HWB6 share the same mounting bracket so electrical system modification can be performed without bracket or sheet metal alterations.
- A UL certification for this fuseholder means it can be used as a component in material handling and electric-batterypowered industrial truck applications with confidence that it meets the requirements of UL 583 standards.

### **Specifications Overview**

Max Fuse Rating: 30A per circuit

Max Continuous Current: 130A Number of Cavities 12

**Operating Temp:**  $-40 \, ^{\circ}\text{C} \text{ to } +105 \, ^{\circ}\text{C}$  **Ingress Protection:** IP67/IP69K

## **Applications**

- Accessory circuits
- · Overflow circuits
- · Main unit on small vehicles
- Upfitting vehicle electrical systems

#### **Web Resources**

Download 2D print and technical resources at: littelfuse.com/hwb12

# **Ordering Information**

PART NUMBER	COVER		AssureLatch™		MOUNTING
	BLACK	CLEAR	AssureLaton	77	BRACKET
PDM33001ZXM		•	•		
PDM33002ZXM	•		•	•	
PDM33003ZXM		•	•		Straight
PDM33004ZXM	•		•	•	Straight

UR file number: AU6325

1 of 2

TPA: Terminal Position Assurance secondary locks for wire terminals

#### **Accessories and Service Parts**

PART NUMBER	DESCRIPTION		
868-094	Base		
873-021-001	Cover in clear		
873-021-002	Cover in black (UR)		
901-326	Silicone seal		
883-088	1 pcs. AssureLatch™ with thumb release		
883-087	TPA		
890009470	Tether		
901-327	Foam insert		
868-964	90° angle mounting bracket		
868-068	30° angle mounting bracket		



# **HWB12 SEALED POWER DISTRIBUTION MODULE**

# **Specifications**


Max Fuse Rating	30A per circuit		
Max Continuous Current	130A		
Number of Cavities	12		
Recommended Mounting	M6 bolt and lock washer		
Mounting Bracket Torque	5.5-6.5 Nm		
Temperature Range	-40 °C to +105 °C		
Ingress Protection Rating	IP67/IP69K		
Dimensions	83.2x69.6x43.6 mm		
Wire Sizes	0.35-2.50 mm <sup>2</sup>		
Mating Terminals & Seals	TE Connectivity MCP Series. Sold separately.		
Accessories	Optional: Cover tether, 30° angle bracket, 90° angle bracket		


# **Mating Terminals and Seals Compatibility**

Wire Size Range (mm²)	Insulation Diameter (mm) FLR	Materials and Finish	Part Number Strip Form	TE Cable Seal Part Number	Cable Seal Color
0.35-0.50	1.2–1.4	1-xxx-1/1-xxx-3	968882	828904-1	Blue
0.5–1.0	1.4–2.1	1-xxx-1/1-xxx-2/1-xxx-3	968855	828904-2	Blue
1.0-2.5	2.2–3.0	1-xxx-1/1-xxx-3	968857	828905-1	White
Empty Cavity	_	_	Cable Seal Plug	828922-1	Natural

Sold separately. Available from TE Connectivity.

### **Dimensions in millimeters**

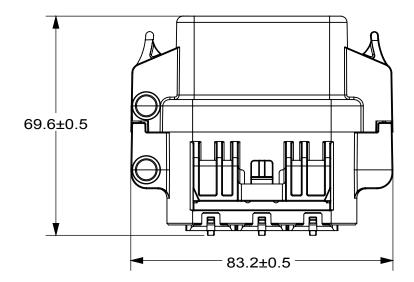





Visit **Littelfuse.com** for the most up-to-date product information. Littelfuse reserves the right to make product changes, without notice. Material in this document is as accurate as known at the time of publication.

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fuse Holder category:

Click to view products by Littelfuse manufacturer:

Other Similar products are found below:

570-290-741P40 570-290-751P40 020417G 020418E 6R30A1B F600A3B 80910030 8601.2020 G15A2SPQ 9-3557-GP REV A HDJ-B R6J30A3S HFH-1 RF30A2B RF30A3SP 15600-08-10 BK/FHN19G BK/HHM BK/HKP-CCHH BK/HKP-JJ BK/HTJ-LES-FUSE HMG-241 HTJ-LES-FUSE C4044-1 2086-1 2193 2602 2650 178.000100 FHN31G1 T30A2B G4PB8 2660 2799 CQ-209V HKP-CCHH R6F30A2S 341001A 345621A CVRMCC 4202 4407 4408 4413 4423 4532 4537 TSD1404-12 BK/FHN31G1 BK/HC-5