

Solid State Relays

SRP1-CE Series

   **REACH** **HF**



Description

The SRP1-CE Relays series offers an affordable solution for controlling simple heating applications. Designed with efficiency in mind, these solid-state relays (SSRs) provide essential features without compromising on quality.

- Industrial-Grade Build: Crafted for durability, these SSRs are built to withstand demanding environments using back-to-back SCRs to guarantee high quality, reliability, and longevity.
- IP20 Removable Protection: The IP20-rated design ensures protection against dust and accidental contact. Easily remove the cover for maintenance or adjustments.

Features & Benefits

FEATURES	BENEFITS
Zero Cross Switching	Reduces electrical noise and minimizes voltage spikes during switching, enhancing overall system stability
Compliance with International Standards (cRUus, VDE, CE, UKCA)	Ensures that the Solid-State Relay (SSR) has undergone rigorous testing, providing enhanced safety and product quality
Efficient Design with High Quality	Balances cost-effectiveness with reliable performance, making it an ideal choice for budget-conscious projects

Applications

- Cooking ovens & hot drinks dispensers
- Commercial fryers and food warmers
- Air handlers and other HVAC equipment
- Plastic & packaging machinery
- Industrial ovens & electronics production equipment
- Heating in industrial automation

Solid State Relays

SRP1-CE Series

Ordering Information

FOR HEATING CONTROL						
CATALOG NUMBER	OUTPUT MAX CURRENT	OUTPUT VOLTAGE	OUTPUT SWITCHING STYLE	OUTPUT OVERVOLTAGE PROTECTION	INPUT VOLTAGE RANGE	COMPLIANCE
SRP1-CEDZL-010NC-N	10 A	12-280 V AC	Zero Cross	-	4-32 V DC	сЯUus, VDE, CE, UKCA
SRP1-CEDZL-020NC-N	20 A	12-280 V AC	Zero Cross	-	4-32 V DC	сЯUus, VDE, CE, UKCA
SRP1-CEDZL-040NC-N	40 A	12-280 V AC	Zero Cross	-	4-32 V DC	сЯUus, VDE, CE, UKCA
SRP1-CEDZH-050NC-N	50 A	24-660 V AC	Zero Cross	-	4-32 V DC	сЯUus, VDE, CE, UKCA
SRP1-CEDZH-070NC-N	70 A	24-660 V AC	Zero Cross	-	4-32 V DC	сЯUus, VDE, CE, UKCA
SRP1-CEDZH-080NC-N	80A	24-660 V AC	Zero Cross	-	4-32 V DC	сЯUus, VDE, CE, UKCA

Input/Control Specifications¹


GENERAL DATA					
SYMBOL	PARAMETER	RANGE	VALUE FOR 10A, 20A, 40A VERSIONS	VALUE FOR 50A, 70A, 80A VERSIONS	UNIT
Uc	Input (Control) Voltage*	Maximum	32	32	VDC
		Nominal	5 – 12 – 24	5 – 12 – 24	VDC
		Minimum	3	3.5	VDC
Urv	Reverse Voltage	Maximum	-32	-32	VDC
Uc on	Turn-On Voltage (Pick-up/Engage/Activation Voltage)	Minimum	3.0	3.5	VDC
Uc off	Turn-Off Voltage (Drop Out/Release/Deactivation Voltage)	Nominal	1.0	2.0	VDC
Ic	Input (Control) Current	Maximum	<13	<13	mA
		Minimum	<10	<10	mA
-	Input Impedance	Nominal	Current Regulated	Current Regulated	-
Ton	Turn-On Time	Maximum	10	10	1/2 ms
Toff	Turn-Off Time	Maximum	10	10	1/2 ms

*Increase Min voltage by 1V for operations from -20 to -40 °C.


Input Current vs Input Voltage Graphs (For Power Supply Selection)

To ensure the SSR operates efficiently and reliably, it is essential to understand the relationship between input voltage and input current. The following input current graphs provide detailed information on the current consumption of our SSRs across the specified input voltage range. This data is crucial for selecting an appropriate power supply and ensuring the relay functions within its safe operating limits. Proper understanding of current consumption is vital for the optimal performance of your application.

3-32 VDC Input (10A, 20A, 40A Versions)

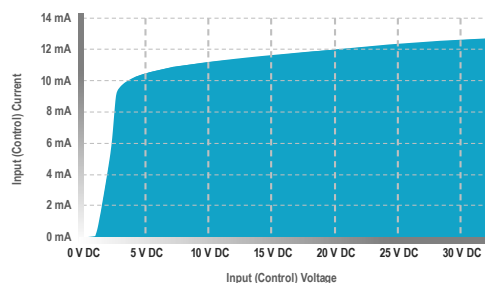

3.5-32 VDC Input (50A, 70A, 80A Versions)

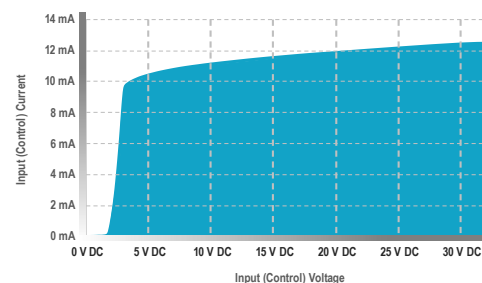

Solid State Relays

SRP1-CE Series

Output/Load Specifications¹

LOW VOLTAGE VERSIONS (280V)							
SYMBOL	PARAMETER	CONDITION	RANGE	VALUE FOR 10A VERSIONS	VALUE FOR 20A VERSIONS	VALUE FOR 40A VERSIONS	UNIT
-	Output Configuration	-	-	SPST-NO	SPST-NO	SPST-NO	-
f	Operating Frequency	-	Minimum	0,1	0,1	0,1	Hz
			Nominal	50-60	50-60	50-60	
			Maximum	800	800	800	
Ue	Operating Voltage	47-63Hz	Minimum	12	12	12	Vrms
			Nominal	120-240	120-240	120-240	
			Maximum	280	280	280	
U _{sync}	Zero Cross Level (Zero Voltage Turn-on)	-	Maximum	35	35	35	V
U _a	Latching Voltage	At U _e Nominal	Minimum	10	10	10	V
V	On-State Voltage Drop	At Rated Current	Maximum	0,85 + 0,035 x I _e	0,85 + 0,016 x I _e	0,9 + 0,014 x I _e	Vrms
V _{to}	Threshold Voltage (Power Loss Calculations only)	T _{vj} = 150 °C	Maximum	0,85	0,85	0,90	V
r _t	On state dynamic resistance (Power Loss Calculations only)	T _{vj} = 150 °C	Maximum	35,0	16,0	14,0	mΩ
U _p	Transient Over-Voltage* (Peak/Blocking/Non-Repetitive Voltage)	-	Maximum	600	600	600	V _{pk}
I _{tsm}	Transient Over-Current (Surge/Overload/Non-Repetitive Current)	Max 1 Cycle T _p = 10ms	Minimum	120	260	380	A _{pk}
			Nominal	160	340	500	
I _{lk}	Leakage Current (Off-State)	At Rated Voltage	Maximum	1	1	1	mArms
dv/dt	Critical dV/dt (Off-State)	At Maximum Rated Voltage	Minimum	500	500	500	V/μsec
di/dt	Non-repetitive di/dt	-	Maximum	50	50	50	A/μsec
I ² _t	I ² _t Value for Fusing	½ Cycle at 50/60Hz (T _{vj} =45 °C)	Minimum	72	340	720	A ² sec
			Nominal	128	600	1250	
P _f	Minimum Power Factor	At Maximum Load	Minimum	0,5	0,5	0,5	-
P _d	Power Dissipation	At Rated Current	Maximum	0.765 x I _e + 0.035 x I _e ²	0.765 x I _e + 0.016 x I _e ²	0.81 x I _e + 0.014 x I _e ²	W
R _{thj/c}	Thermal Resistance Junction to Case (R _{j/c})	-	Maximum	2,3	0,9	0,55	°C/W

*Output will self trigger between 450-600 V_{pk} not suitable for capacitive loads.

Solid State Relays

SRP1-CE Series

Output/Load Specifications¹ (Continued)

HIGH VOLTAGE VERSIONS (600V)							
SYMBOL	PARAMETER	CONDITION	RANGE	VALUE FOR 50A VERSIONS	VALUE FOR 70A VERSIONS	VALUE FOR 80A VERSIONS	UNIT
-	Output Configuration	-	-	SPST-NO	SPST-NO	SPST-NO	-
f	Operating Frequency	-	Minimum	0,1	0,1	0,1	Hz
			Nominal	50-60	50-60	50-60	
			Maximum	800	800	800	
Ue	Operating Voltage	47-63Hz	Minimum	24	24	24	Vrms
			Nominal	400	400	400	
			Maximum	600	600	600	
U _{sync}	Zero Cross Level (Zero Voltage Turn-on)	-	Maximum	35	35	35	V
U _a	Latching Voltage	At U _e Nominal	Minimum	10	10	10	V
V	On-State Voltage Drop	At Rated Current	Maximum	0,85 + 0,0075 x I _e	1 + 0,0045 x I _e	0,8 + 0,003 x I _e	Vrms
V _{to}	Threshold Voltage (Power Loss Calculations only)	T _{vj} = 150 °C	Maximum	0,85	1,00	0,80	V
r _t	On state dynamic resistance (Power Loss Calculations only)	T _{vj} = 150 °C	Maximum	7,5	4,5	3,0	mΩ
U _p	Transient Over-Voltage* (Peak/Blocking/Non-Repetitive Voltage)	-	Maximum	1200	1200	1200	V _{pk}
I _{tsm}	Transient Over-Current (Surge/Overload/Non-Repetitive Current)	1/2 Cycle At 50/60 Hz (T _{vj} =45 °C)	Minimum	530	1100	1400	A _{pk}
			Nominal	580	1200	1500	
I _{lk}	Leakage Current (Off-State)	At Rated Voltage	Maximum	1	1	1	mArms
dv/dt	Critical dV/dt (Off-State)	At Maximum Rated Voltage	Minimum	500	500	500	V/μsec
di/dt	Non-repetitive di/dt	-	Maximum	50	50	50	A/μsec
I ² _t	I ² _t Value for Fusing	½ Cycle at 50/60Hz (T _{vj} =45 °C)	Minimum	1404	6000	9800	A² sec
			Nominal	1680	7200	11250	
P _f	Minimum Power Factor	At Maximum Load	Minimum	0,5	0,5	0,5	-
P _d	Power Dissipation	At Rated Current	Maximum	0.765 x I _e + 0.0075 x I _e ²	0.9 x I _e + 0.0045 x I _e ²	0.72 x I _e + 0.003 x I _e ²	W
R _{thj/c}	Thermal Resistance Junction to Case (R _{jc})	-	Maximum	0,6	0,3	0,3	°C/W

*Output will self trigger between 450-600 V_{pk} not suitable for capacitive loads.

The maximum continuous current value given in this datasheet is only for resistive loads (specifically AC-1 type), which are mainly used for heating control.

SYMBOL	PARAMETER	CONDITION	RANGE	VALUE FOR 10A VERSIONS	VALUE FOR 20A VERSIONS	VALUE FOR 40A VERSIONS	UNIT
I _e (AC-51)	Load Current (Continuous) – Heating Elements (AC-1)	At 40 °C	Maximum*	12	25	40	Arms
			Minimum	0,005	0,005	0,05	Arms

SYMBOL	PARAMETER	CONDITION	RANGE	VALUE FOR 50A VERSIONS	VALUE FOR 70A VERSIONS	VALUE FOR 80A VERSIONS	UNIT
I _e (AC-51)	Load Current (Continuous) – Heating Elements (AC-1)	At 40 °C	Maximum*	60	90	95	Arms
			Minimum	0,005	0,005	0,005	Arms

*Heat sinking required, see derating curves.


Solid State Relays

SRP1-CE Series

Thermal Derating Curves (For Heatsink Selection)


To operate the Solid-State Relay (SSR) at its specified ratings, the use of a heatsink is mandatory. The following thermal derating curves illustrate the maximum load current that our SSRs can manage under varying ambient temperatures and heatsink sizes. It is crucial to select a heatsink that is most suitable for your specific application.

10A Versions

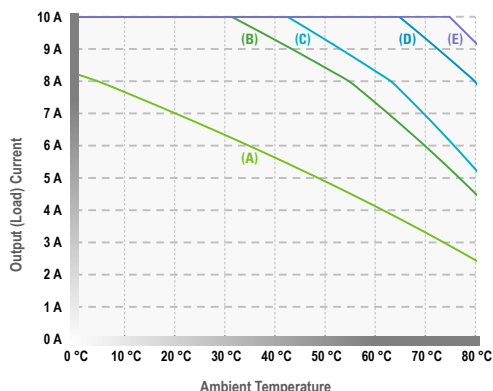


(A) No Heatsink (C) 5.0 °C/W: Heatsink (E) 2.1 °C/W: Heatsink
(B) 6.0 °C/W: Heatsink (D) 3.0 °C/W: Heatsink

20A Versions

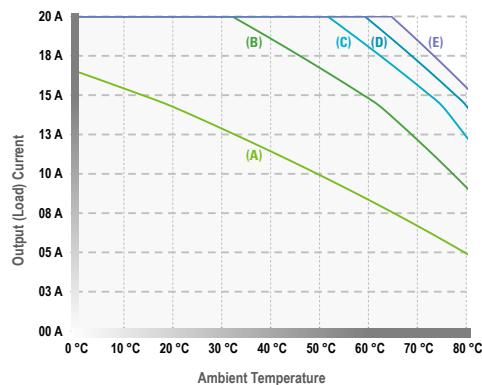


(A) 6.0 °C/W: Heatsink (C) 2.1 °C/W: Heatsink (E) 1.5 °C/W: Heatsink
(B) 3.0 °C/W: Heatsink (D) 1.75 °C/W: Heatsink

40A Versions

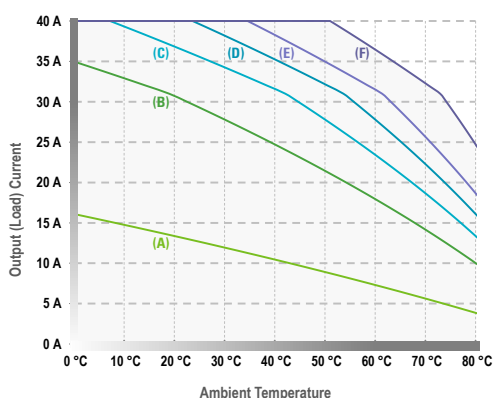


(A) 6.0 °C/W: Heatsink (C) 1.5 °C/W: Heatsink (E) 1.0 °C/W: Heatsink
(B) 2.1 °C/W: Heatsink (D) 1.2 °C/W: Heatsink (F) 0.7 °C/W: Heatsink

50A Versions

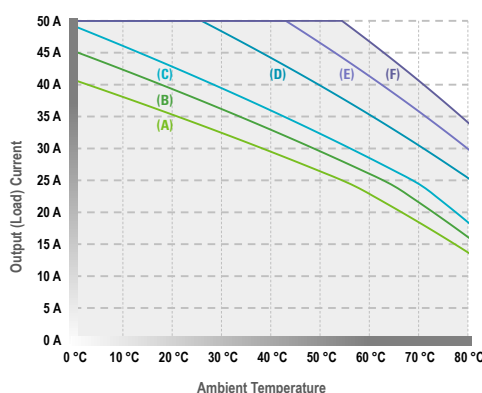


(A) 2.1 °C/W: Heatsink (C) 1.5 °C/W: Heatsink (E) 0.7 °C/W: Heatsink
(B) 1.75 °C/W: Heatsink (D) 1.0 °C/W: Heatsink (F) 0.5 °C/W: Heatsink

70A Versions

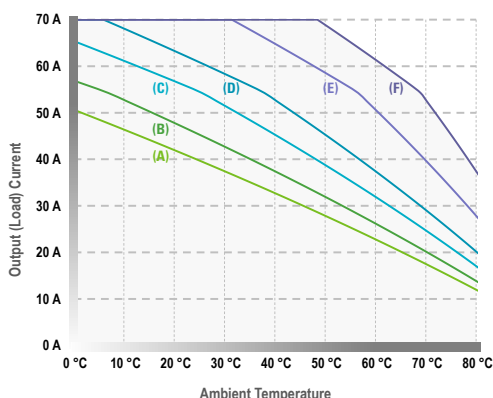

(A) 1.75 °C/W: Heatsink (C) 1.2 °C/W: Heatsink (E) 0.7 °C/W: Heatsink
(B) 1.5 °C/W: Heatsink (D) 1.0 °C/W: Heatsink (F) 0.5 °C/W: Heatsink

80A Versions

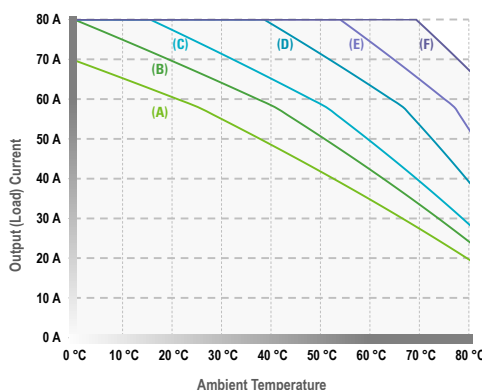

(A) 1.5 °C/W: Heatsink (C) 1.0 °C/W: Heatsink (E) 0.5 °C/W: Heatsink
(B) 1.2 °C/W: Heatsink (D) 0.7 °C/W: Heatsink (F) 0.3 °C/W: Heatsink

Solid State Relays

SRP1-CE Series

Considerations – Switching Type

In applications requiring precise temperature management, solid-state relays (SSRs) play a crucial role. Specifically, the Zero Cross Switching type of SSR is commonly employed to regulate heaters based on signals from a temperature controller.

This technology proves particularly valuable in scenarios where high-frequency switching occurs—such as when a heater cycles on and off frequently over short intervals for extended periods.

Considerations – Inrush Current

It's essential to recognize that variations exist between different types of heating elements, especially in hot or cold conditions. While it is generally expected that heating elements exhibit no inrush current, in certain heating elements cold conditions can lead to an inrush current equivalent to 1.4 times the nominal current. To mitigate this, we highly recommend oversizing the current rating and ensuring an appropriately sized heatsink. Doing so improves the relay's thermal endurance and extends its operational lifespan.

So, when selecting an SSR, consider using one with a capacity approximately 1.4 times that of the heater or operating the SSR at only 75%-80% of its maximum capacity. The following table provides guidance for choosing the right SSR for a specific heater load.


NOMINAL SSR CURRENT RATING	MAXIMUM RECOMMENDED HEATER CURRENT	HEATER POWER AT 120 VAC	HEATER POWER AT 240 VAC	HEATER POWER AT 400 VAC	HEATER POWER AT 480 VAC	HEATER POWER AT 600 VAC
10 A	8 A	960 W	1.9 KW	-	-	-
20 A	16 A	1.8 KW	3.6 KW	-	-	-
40 A	32 A	3.6 KW	7.2 KW	-	-	-
50 A	40 A	4.8 KW	9.6 KW	16.0 KW	19.2 KW	24.0 KW
70 A	56 A	6.3 KW	12.6 KW	21.0 KW	25.2 KW	31.5 KW
80 A	64 A	7.2 KW	14.4 KW	24.0 KW	28.8 KW	36.0 KW

Output Surge Current Withstand Graphs (For Transient Protection)

To ensure the Solid-State Relay (SSR) can handle sudden increases in current without damage, it is essential to understand its surge current capacity. The following surge current graphs illustrate the maximum surge current that our SSRs can withstand over various durations. This information is crucial for selecting an SSR that can endure transient overcurrent events, ensuring the reliability and safety of your electrical system. Proper understanding of surge current capacity helps in preventing equipment failure and maintaining optimal performance in your application.


The graphs include a Single Pulse Surge Current curve used to define the protection offered by fuses, helping in the selection of appropriate protective devices. Additionally, it is important to ensure that the Repetitive Surge Current curve is not exceeded during normal operation, as frequent overload currents can decrease the life expectancy of the SSR. Therefore, caution is advised to maintain the longevity and reliability of the SSR.

10A Versions:

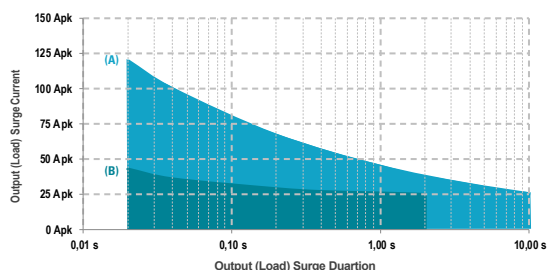

- (A) **Single Pulse Surge:** Initial SSR internal temperature at 25 °C (cooler state from minimal or no operation).
(B) **Repetitive Surges:** Initial SSR internal temperature 90 °C (warmer state from continuous operation).

20A Versions:

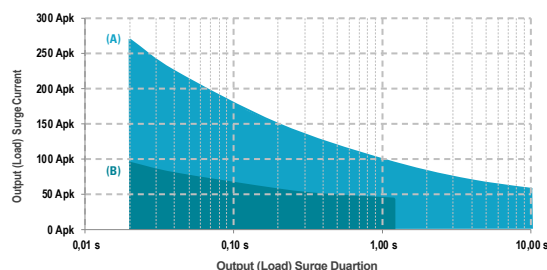


- (A) **Single Pulse Surge:** Initial SSR internal temperature at 25 °C (cooler state from minimal or no operation).
(B) **Repetitive Surges:** Initial SSR internal temperature 121 °C (warmer state from continuous operation).

Solid State Relays

SRP1-CE Series


40A Versions:

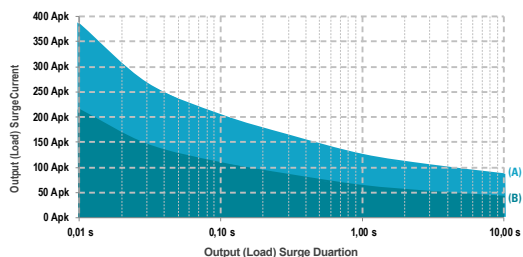

(A) **Single Pulse Surge:** Initial SSR internal temperature at 25 °C (cooler state from minimal or no operation).

(B) **Repetitive Surges:** Initial SSR internal temperature 70 °C (warmer state from continuous operation).


50A Versions:

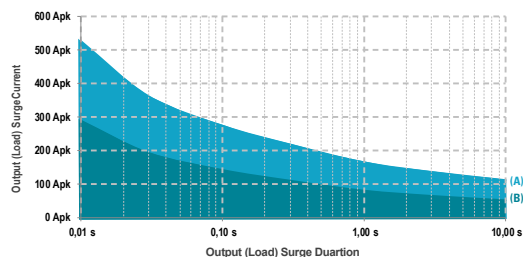

(A) **Single Pulse Surge:** Initial SSR internal temperature at 25 °C (cooler state from minimal or no operation).

(B) **Repetitive Surges:** Initial SSR internal temperature 70 °C (warmer state from continuous operation).


70A Versions:

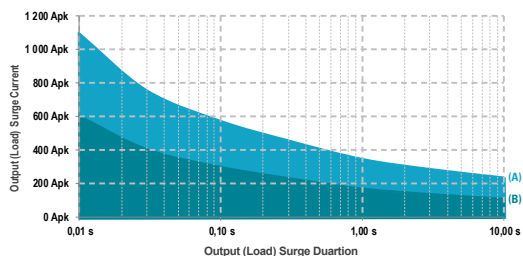

(A) **Single Pulse Surge:** Initial SSR internal temperature at 25 °C (cooler state from minimal or no operation).

(B) **Repetitive Surges:** Initial SSR internal temperature 70 °C (warmer state from continuous operation).

80A Versions:

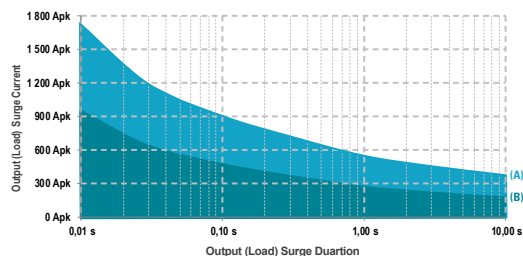

(A) **Single Pulse Surge:** Initial SSR internal temperature at 25 °C (cooler state from minimal or no operation).

(B) **Repetitive Surges:** Initial SSR internal temperature 70 °C (warmer state from continuous operation).

General Specifications¹

GENERAL DATA					
SYMBOL	PARAMETER	CONDITION	RANGE	VALUE	UNIT
-	LED for Input (Control) Status Indicator	-	-	Continuously ON Green LED, when control input is applied	-
Ui	Isolation (Dielectric Strength)	Input to Output (50/60 HZ)	Nominal	4 000	Vrms
		Input/Output to Ground (50/60 HZ)	Nominal	2 500*	
Ri	Insulation Resistance	@ 500 VDC	Minimum	1	GΩ
-	Coupling Capacitance	Input/Output	Maximum	0,8	pF
Uimp	Impulse Withstand Voltage	-	Nominal	4000	Vrms
-	Short Circuit Current Rating (SCCR)	-	-	100	kA
-	Endurance according to American Standard UL508	-	Typical	100 000	Cycles
-	MTTFd (Mean Time to Dangerous Failure) (Calculated in accordance with the guidelines for safety-related parts of control systems, as specified by the international standard ISO 13849-1)	-	-	110	Years
-	MTBF** (Mean Time Between Failures) (Calculated in accordance with the Military Handbook Guidelines for Reliability Prediction of Electronic Equipment, as specified by the US Department of Defense Standard MIL-HDBK-217)	@ 40 °C ambient	-	72	Years
		@ 60 °C ambient	-	46	

*Value for 50A, 70A and 80A versions is 4 000 Vrms.

**All parameters at 50% power rating and 100% duty cycle.

Solid State Relays

SRP1-CE Series

General Specifications¹ (Continued)

ENVIRONMENTAL DATA					
SYMBOL	PARAMETER	CONDITION	RANGE	VALUE	UNIT
-	Vibration (Test conducted in accordance with the Vibration Environmental Testing Guidelines of the International Standard IEC 60068-2-6)	5-100Hz	Nominal	10	g
-	Shock (Test conducted in accordance with the Shock Environmental Testing Guidelines of the International Standard IEC 60068-2-27)	11ms	Nominal	30, 40, 50	g
-	Ambient Temperature - Operating (Working) ²	No icing, no condensation	Maximum	100 (212)	°C (°F)
-			Minimum	-40 (-40)*	°C (°F)
-	Ambient Temperature - Storage	No icing, no condensation	Maximum	125 (257)	°C (°F)
-			Minimum	-40 (-40)*	°C (°F)
HR	Relative Ambient Humidity (Per international standard IEC/EN 60068-2-78)	Non-condensing @ 40 °C	Nominal	40 to 85	%
-	Pollution Degree	Non-conductive pollution with condensation possibilities	Nominal	2	kA


*Value for 10A, 20A, 40A and 50A versions is -55 (-67) °C (°F).

MECHANICAL DATA					
SYMBOL	PARAMETER	CONDITION	RANGE	VALUE	UNIT
-	Product Weight	-	Typical	80 (0.18)	g (lbs)
-	Housing Material (In accordance with the American Standard UL- 94 for Safety of Flammability of Plastic Materials for Parts in Devices and Appliances)	-	-	Plastic UL 94 V-0	-
-	Baseplate Material	-	-	Aluminum, Tinned-plated	-
-	Touch Protection Level (Test conducted in accordance with the IP Code of Degrees of Protection Testing Guidelines of the International Standard IEC 60529)	-	-	IP20	-
-	Screw Torque Range	Input (Control) Terminals	Minimum Maximum	1.2 (11) 2.0 (18)	Nm (in-lb)
		Output (Load) Terminals	Minimum Maximum	2 (18) 3 (26)	Nm (in-lb)
		SSR Mounting	Minimum Maximum	1.2 (11) 1.8 (16)	Nm (in-lb)
-	Screw Thread Size	Input Terminals	-	M4 x 0.7	-
		Output Terminals	-	M5 x 0.8	-
		SSR Mounting	-	M4 x 12mm or #8-32 Pan Head	-


Solid State Relays

SRP1-CE Series


Product Dimensions (Millimeters)

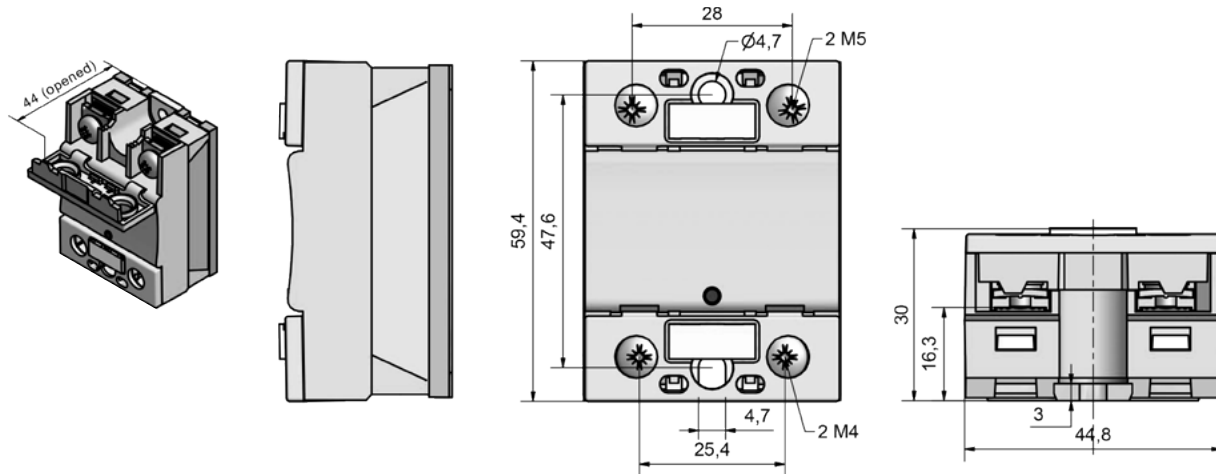

Wiring Diagram

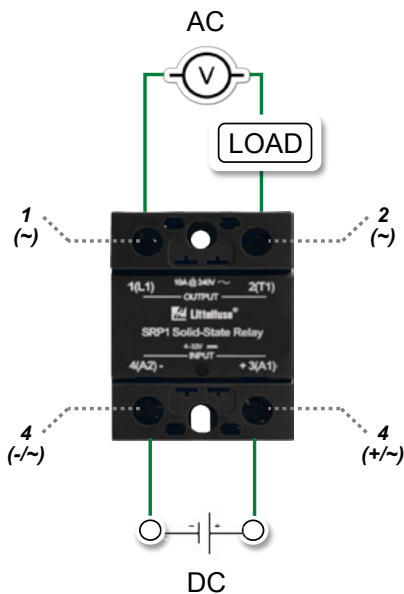

Equivalent Circuit Block

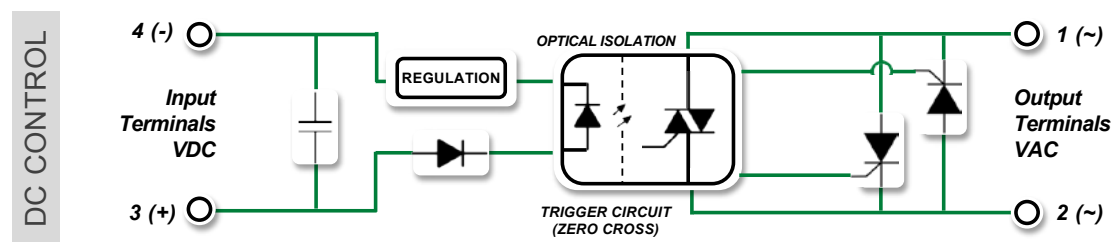

Solid State Relays

SRP1-CE Series

Short-Circuit Protection by Fuse

To safeguard solid-state relays (SSRs) against load short circuits, the use of fuses is essential, especially fast-acting ones. Here are the key considerations:



- **Fuse Selection:** The I^2t value (energy withstand capability) of the fuse should be less than half of the I^2t value of the relay. Standard fuses are inadequate because they cannot react swiftly enough to prevent fault currents from exceeding the maximum levels that thyristors (used in SSRs) can handle. Therefore, we strongly recommend employing ultra-fast fuses.
- **Fuse Placement:** Position the fuse in front of the SSR in the circuit. This strategic placement ensures that if the relay must unexpectedly break the earth insulation (due to overheating, case damage, or leakage with the heatsink), the fuse will protect the entire circuit from firing.
- **Resource for Fuse Options:** For the most suitable fuse options, consider checking the [Littelfuse website](https://www.littelfuse.com).

Standards Conformity & Certifications

Product Safety Certifications

Products tested, compliant and certified to the following standards that states the requirements for electrical products to ensure they are safe for consumers to use.

CERTIFICATION BODY MARK	CERTIFICATION BODY NAME	CERTIFICATION DESCRIPTION	STANDARDS COVERED BY THE CERTIFICATION
	cRUus	North American certificate of compliance with the Safety requirements for Industrial Control Equipment	 UL508 American Standard of Safety for Industrial Control Equipment.  CAN/CSA C22.2 No. 14-18 Canadian Standard of Safety for Industrial Control Equipment.
	VDE	European certificate of compliance with the Safety requirements for Solid-state relays and Low Voltage Gear Safety	 IEC/EN 60947-1, VDE 0660-100 European Standard of Safety for Low-Voltage Switchgear and Controlgear.  IEC/EN 60947-4-3, VDE 0660-109 European Standard of Safety for Semiconductor Controllers and Contactors for Non-Motor Loads.
	CE	Conformity with the European safety, health, and environmental protection requirements.	 LVD Directive 2014/35/EU EU Directive of Safety for Low Voltage Gear Equipment. In accordance with the Low Voltage Gear Testing Guidelines of the International Standard IEC 60947-4-3  EMC Directive 2014/30/EU EU Directive of Electromagnetic Compatibility. In accordance with the Low Voltage Gear Testing Guidelines of the International Standard IEC 60947-4-3  RoHS Directive 2015/863/EU EU Directive of Hazardous Substances Restriction. In accordance with the Assessment of electrical and electronic products with respect to the restriction of Hazardous substances Guidelines of the International Standard IEC 63000
	UKCA	Conformity with the UK product safety regulations	 SI 1101 UK Regulations of Safety for Electrical Equipment. In accordance with the Low Voltage Gear Testing Guidelines of the International Standard IEC 60947-4-3  SI 1091 UK Regulations of Electromagnetic Compatibility. In accordance with the Low Voltage Gear Testing Guidelines of the International Standard IEC 60947-4-3  SI 3032 UK Regulations of Hazardous Substances Restriction. In accordance with the Assessment of electrical and electronic products with respect to the restriction of Hazardous substances Guidelines of the International Standard IEC 63000

Solid State Relays

SRP1-CE Series

EMC Compliance (Electro-magnetic compatibility)

Radiated Emissions

-	STANDARD NAME	STANDARD DESCRIPTION	STANDARD NUMBER	LEVELS
	Radiated RF	Radio interference field emission (radiated)	International Standard CISPR 11	Class A: 30M – 1GHz
	Conducted RF	Radio interference voltage emissions (conducted)	International Standard CISPR 11	Class A (with external filter): 150k – 30MHz

Immunity

-	STANDARD NAME	STANDARD DESCRIPTION	STANDARD NUMBER	LEVELS
	ESD	Immunity to Electrostatic Discharge (ESD)	International Standard IEC 61000-4-2	Level 3: -Contact Discharge: ± 6 kV -Air Discharge: ± 8 kV -Performance Criteria: A
	Radiated RF	Immunity to Radiated Radio Frequency	International Standard IEC 61000-4-3	Level 3: 10 V/m (80MHz-2GHz) Level 2: 3 V/m (2GHz-6GHz) Performance Criteria: A
	Burst	Immunity Electrical Fast Transients (Burst)	International Standard IEC 61000-4-4	2 kV Performance Criteria: B
	Surge	Immunity to Electrical Surges	International Standard IEC 61000-4-5	2 kV Performance Criteria: B
	Conducted RF	Immunity to Conducted Radio Frequency	International Standard IEC 61000-4-6	Level 3: 10V/m (0.15-80 MHz) Performance Criteria: A
	Dips	Immunity to Voltage Dips	International Standard IEC 61000-4-11	0% for 0.5, 1 cycle, Performance Criteria: A 40% for 10/12 cycles, Performance Criteria: A 70% for 25/30 cycles, Performance Criteria: A 80% for 250/300 cycles, Performance Criteria: A
	Interruptions	Immunity to Voltage Interruptions	International Standard IEC 61000-4-11	0% for 250/300 cycles, Performance Criteria: B

While these products are designed to meet high industrial standards for Class A equipment, ensuring robust performance in demanding environments, they may cause radio interference when used in domestic settings. To mitigate this, additional noise reduction measures, such as filters or shielding, may be necessary. Ensure that the entire setup where the SSR is installed complies with all relevant EMC regulations required by the application.

Environmental Compliance²

Products comply to the following environmental standard requirements for electrical products to ensure they are safe for consumers to use.

-	STANDARD NAME	STANDARD DESCRIPTION	STANDARD NUMBER
	RoHS	Conformity with the European Restriction of Hazardous Substances in electrical and electronic products	European Directive 2015/863/EU (IEC 63000)
	REACH	Conformity with the Registration, Evaluation, Authorization and Restriction of Chemicals regulation to ensure safe use of chemicals	European Directive 1907/2006
	WEEE	Conformity with the Waste Electrical and Electronic Equipment regulation to ensure proper disposal and recycling of e-waste	Regulation 2002/96/EC

Solid State Relays

SRP1-CE Series

Accessories

IMAGE	CATALOG NUMBER	TYPE	DESCRIPTION
	SADH-C1N600	DIN Rail Adaptor	6 °C/W Thermal Resistance
	SADH-NN210	Heatsink	2.1 °C/W Thermal Resistance
	SADH-NN175	Heatsink	1.75 °C/W Thermal Resistance
	SADH-NN120	Heatsink	1.2 °C/W Thermal Resistance
	SADH-NN100	Heatsink	1.0 °C/W Thermal Resistance
	SADH-NN050	Heatsink	0.5 °C/W Thermal Resistance, 24 VDC
	SADH-ND030	Heatsink	0.3 °C/W Thermal Resistance, 24 VDC
	SADH-NA030	Heatsink	0.3 °C/W Thermal Resistance, 230 VAC
	SANP-C1N030	Thermal Interface	Thermal Pads
	SANG-CNN090	Thermal Interface	Thermal Paste
	SANT-C1NM40	Mounting Screws	Mounting Screws Kit
	SANL-C1N040	Power Lugs	Power Lugs for High Current

Notes:

¹All parameters at 25 °C unless otherwise specified.

²The environmental compliance data reflects the most current information available and adheres to our rigorous standards for quality and sustainability. These specifications are valid from the product's initial release and are subject to change with ongoing improvements.

Warning Information

Caution: Material Damage, Electric Shock, and Arc Flash Hazard. Before installing or working with this equipment, take the following precautions:

1. **Disconnect all power:** Ensure that all power sources are disconnected.

2. **Verify connections:** Double-check all connections.

Failure to adhere to these instructions may lead to **serious injury or damage** of equipment.

Disclaimer Notice – Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/product-disclaimer.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solid State Relays - SSRs](#) category:

Click to view products by [Littelfuse](#) manufacturer:

Other Similar products are found below :

[GA5-6D25V](#) [6441](#) [SSRT-120A10](#) [SSR-240A80](#) [AD4C212](#) [AD6-C250](#) [AD8-C111](#) [S111](#) [1SNA645047R0000](#) [1SVR405610R4060](#)
[SCI0501200](#) [SGT7650500](#) [SGT8690500](#) [SGT8850200](#) [SGT8858200](#) [SGT9834300](#) [SGT9874300](#) [SMB8650510](#) [SMB8850210](#)
[77.01.9.024.9024](#) [77.01.9.024.9125](#) [SSP3A250BDT](#) [6410AXXTZS-DC3](#) [6440DTX-1](#) [6475ASX-1](#) [66125AXXSZS-AC90](#) [6690AXXSZS-](#)
[AC90](#) [84134080](#) [861SSR410-DC-2](#) [861SSR610-AC-2](#) [861SSR610-DC-2](#) [A2450EGH](#) [1SNA645022R2700](#) [1SNA645025R2200](#)
[1SNA645029R0600](#) [1SNA645051R0400](#) [ASR-SI240A10RY-L](#) [ASR-SI240A10ZY-LV](#) [ASR-SI240D10R-LRV](#) [ASR-SI240D10RW-L](#) [ASR-](#)
[SI240D10Z-LR](#) [ASR-SI240D25Z-LRQ](#) [ASR-SI240D25ZW-LM](#) [ASR-SI240D40RW-L](#) [ASR-SI480A25RY-LV](#) [ASR-SI480D25RW-L](#) [ASR-](#)
[SI480D40RW-L](#) [ASR-SI480D40ZW-L](#) [ASR-SI240D25ZW-LP](#) [ASR-SID240D50ZL-S](#)