

S16 RADIAL PIN LOCK SWITCHES


GENERAL ELECTRICAL & MECHANICAL SPECIFICATION

Switch Rating	1A @ 24V DC
Life:	>10,000 Cycles
Operating Temperature	-20° to +65° C
Proof Voltage:	500Vdc (Initial)
Insulation Resistance:	>999MΩ at 500Vdc(Initial)

RoHS COMPLIANT




PANEL PIERCING DETAILS



GENERAL FEATURES

- Tapered lock head front panel mount
- Single pole, Dual throw lock switch, 90° indexing
- Bright Chrome plated zinc alloy die cast housing
- Key insertion/removal in one or both positions
- Radial cylinder with 7 pin tumblers
- Same key or 100 differ key option

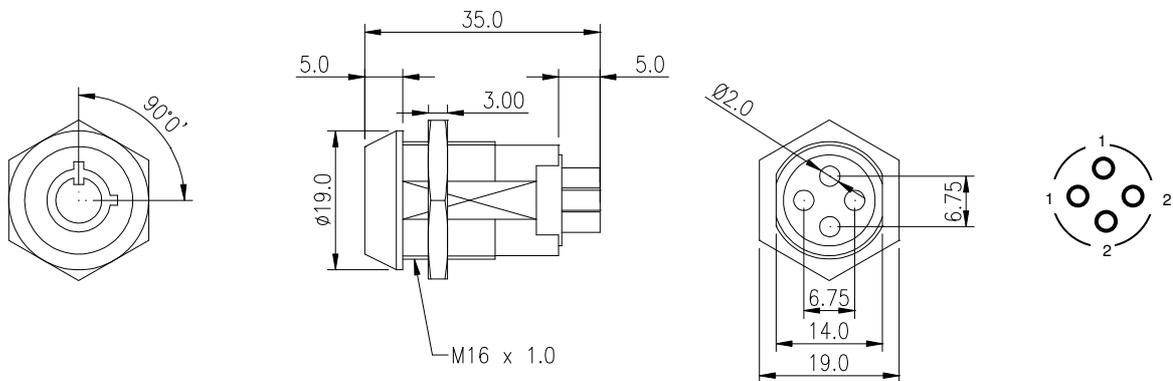

ORDERING CODE	KEY OUT	KEY No	KEY TRAVEL	CONTACT POSITION
S16-A-S-2	0° & 90°	SAME	90°	
S16-A-D-2	0° & 90°	DIFFER	90°	
S16-B-S-2	0°	SAME	90°	
S16-B-D-2	0°	DIFFER	90°	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Keylock Switches](#) category:

Click to view products by [Lorlin](#) manufacturer:

Other Similar products are found below :

[89496-09](#) [58J1007](#) [58J8A45-01B05N](#) [719-0201-000](#) [719-0202-000](#) [719-0702-000](#) [719-5504-000](#) [84800-04](#) [GKNC33L](#) [GKNC3L](#)
[PVA2OAH5](#) [HA1K-2C2VA-2](#) [14-136.025K](#) [14-235.022K](#) [AS6H-2K2A](#) [AS6M-2K1B](#) [AS6Q-2K2A](#) [AS6Q-3K2A](#) [1571487-1](#) [HW4K-2BF20](#)
[KEY-AS6](#) [KH3C-20C](#) [8928K493](#) [2SWK131AL102](#) [AS6M-2K1A](#) [AS6Q-2K1PB](#) [51-401.036D](#) [51-401.036K](#) [51-414.036D](#) [HW1K-31BF20](#)
[HW1K-3HF20](#) [Y1112-2027CLFT](#) [51-155.025D](#) [51-295.022D](#) [51-404.036D](#) [51-405.036D](#) [51-415.036D](#) [1-1437597-8](#) [58J8A36-01B04N](#)
[58M1422](#) [86945-05](#) [719-0204-000](#) [719-0205-000](#) [719-0801-000](#) [719-0804-000](#) [719-0805-000](#) [88422-18](#) [58J8A90-01C02N](#) [58J9P36-](#)
[01B09N](#) [58J8A36-01C03N](#)