

UNCONTROLLED DOCUMENT

PART NUMBER	GT-NG6H1825T	REV.	Α
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
01.09.12	E.C.N. #10BRDR. & REDRAWN.		Α

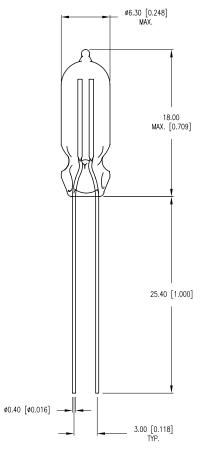



ELECTRO-OPTICAL CHARACTERISTICS

PARAMETER	MIN	TYP	MAX	UNITS
OPERATING VOLTAGE	90		115	٧
STARTING VOLTAGE(AC)			85	V
(DC)			125	V
OPERATING CURRENT:		1.1		mA
LIGHT OUTPUT		111		mlm
LIFE HOURS		10,000		HOURS
EMITTED COLOR:	GREEN			

NOTES:

1. EXTERNAL RESISTOR VALUE: 47K.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= $^{+0.00}_{-0.00}$ MAX.= $^{+0.00}_{-0.00}$ MAX.= $^{+0.00}_{-0.000}$ MAX.= $^{+0.00}_{-0.000}$ PRECISION LINCONTROLLED DOCLIMENT



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538

6mm x 19mm NEON LAMP, GREEN, HIGH BRIGHTNESS.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DIVEDIVINOLLED DOCUMENT						
	DATE:	01.09.12	DRAWN BY:	AB		
	PAGE:	1 OF 1	CHKD BY:	SS		
	SCALE:	NTS	APRVD BY:	JD		
	UNIT: mm [INCH]		(Pr)			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Lamps category:

Click to view products by Lumex manufacturer:

Other Similar products are found below:

5AB 6180 8623 912 120PS 1224 DE603 DW50 IFL-LX2162-16T C9A C9A 3015 303 19 PR13 268 GT-NE6H1225T CM5004WW

32-2211T 323 509K 5314N1 5314N2 WWT1-EW10/GRN 4925H1 DW07 10C7DC-120V 1141 MS25231-313 E73 CM2 7683EBP 8553

XE135B WWT2-EW34BLA 6S6/30V 7367 1301910036 7A1H 8630FBBB WT3F-20 85 106 105 BGF717-UV1 1974D 1495 373 400

502