

Sales Outline DrawingRevision: **A****Specifications:**

May not be suitable for all Medical and Aerospace applications.

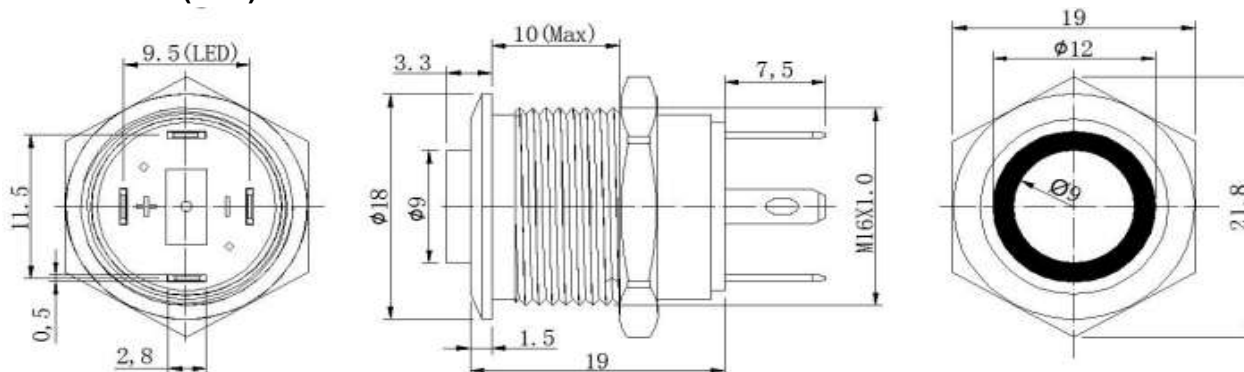


Contact Mallory Sonalert to discuss your application.

Panel Hole (mm)	16 mm
Switch Rated Voltage (VDC / VAC)	36 / 250
Switch Rated Current (A) DC / AC	5 / 5
LED Rated Voltage (VDC)	3-3.2
LED Rated Current (mA)	≤20
Button Color	Green
Switch Function	OFF-MOM
Circuit	SPST 1NO
Storage & Operating Temperature	-25 °C to +85 °C
Ingress Protection Rating	IP65
Shock Resistance	IK08
Material	PC Plastic, PA66+GF20%, Stainless
Termination Type	Solder Lugs

RoHS Compliant**Part Number:****FPM16-HJ2-S0M4G3***

* NOTES LED COLOR & VDC

R	RED
G	GREEN
B	BLUE
Y	YELLOW
W	WHITE
BLANK	CLEAR

Dimensions (mm):**CONNECTION DIAGRAM:****PANEL HOLE:**

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pushbutton Switches](#) category:

Click to view products by [Mallory Sonalert](#) manufacturer:

Other Similar products are found below :

[8971K1133](#) [LW2L-M1C20M-A](#) [701PB580](#) [7199K101](#) [810KSV30B](#) [MML21KA3ABK](#) [8450K1](#) [861901](#) [861K11911T01A07](#)
[8646AB6X718UL](#) [99-453.837](#) [A3A-7340](#) [ABGW410-R](#) [1211390004](#) [ABN111-Y](#) [ABN400-R](#) [121382](#) [1211500044](#) [121194](#) [1223A2ULCSA](#)
[D5P-MT4](#) [13435AG](#) [13445AD29GX768](#) [AH165-2SGLG1TE3](#) [AH165-TGLR11AA3](#) [AH165-TLR11E](#) [AH165-TLW22E3](#) [AH16P-11](#)
[AH16P-2P3BX](#) [AH16P-TGFGX](#) [14101AF1513](#) [AL6H-M14-JW](#) [AL6H-M17-W](#) [ALFN22211DNG-U](#) [ALQW2BP](#) [1470AF2501](#) [AS480](#)
[1520150-1](#) [AV091003C240K](#) [160100-2506](#) [180659](#) [NE0006](#) [1PB544](#) [1PB587](#) [1PB618](#) [1PB73-T2](#) [IPC1SAD7/1L0S](#) [NX223002B-M](#)
[C7001AEBR](#) [ISR3Z1AD100](#)