

**Mallory Sonalert Products, Inc.**

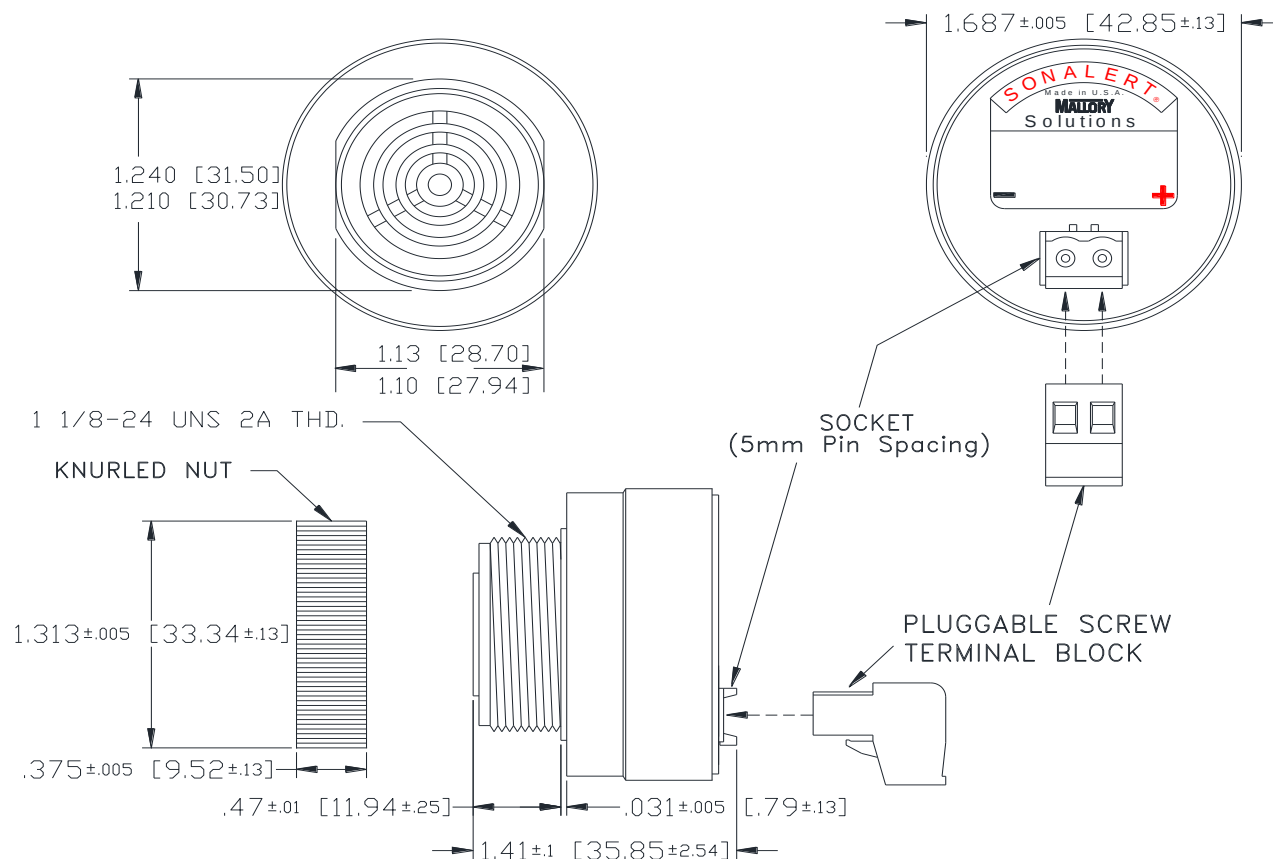
Part #:

SCE120LA3DT8B**Sales Outline Drawing**

Revision:

B**Specifications:**

Sound Level Category	Loud
Mode of Operation	Dual Tone 3.8 - 3.7 kHz @ 1.5 WPS
Voltage Rating	48 to 120 VAC
Frequency	2900 ± 500 Hz
Loudness @ 2 FT	85 to 95 dB(A) Typ.
Current Draw	40mA MAX
Housing Material	6/6 Nylon, Color: Black
Storage Temperature	-40° to +85° C
Operating Temperature	-40° to +85° C
Panel Mounting	Recommended hole size is 1.25"(31.75mm). Thread front will fit standard 30mm(1.181") hole.
Knurled Nut	Used to attach part to panel. The max recommended torque is 10 in-lbs.
Weight (Typical)	1.6 oz (45g)
NEMA 3R, 4X, & 12	Approved with use of ACC03.
cUL Recognition	Supply voltage shall employ Transient Voltage Surge Suppression.
Options	Please contact factory.

Dimensions: Inches (mm)**cUL Recognized****ROHS Compliant**

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Buzzers & Audio Indicators - Industrial](#) ***category:***

Click to view products by [Mallory Sonalert](#) ***manufacturer:***

Other Similar products are found below :

[ESZ-26B](#) [ESZ-25B-5-250B](#) [EWP-202C](#) [EBPT-407](#) [BRP2212L-12-C](#) [CPT-1604-10L100](#) [56-61000-00.22](#) [AI-2628-TF-LW100-WP-R](#)
[4890060](#) [PK-27A35EWBQ](#) [ZT016LDCTR](#) [ZT016LDSR8R](#) [22MMGASKET](#) [SCE028LD3CL1F](#) [SSX-82SC](#) [ZT028LAFP1Y](#) [SSX-82SA](#)
[SCS045MD1MGCS](#) [XB5KSB](#) [713100113](#) [PT-723B-76Q](#) [PT-593SQ](#) [PK-35H29WQ](#) [PK-26N04W-06VQ](#) [PK-26N04W-03VQ](#) [PK-](#)
[27N35EPQ](#) [PK-26N04W-24VQ](#) [PNR1](#) [ACC02](#) [710100113](#) [PB-32N10W-12K](#) [SC628AHJR](#) [ZA048SADP2](#) [SCH110NR](#) [SSX-52SB](#) [SSX-](#)
[82SR](#) [AI-4429-P-CP12-2-R](#) [M22-AMC](#) [PK-27A35EPDGQ](#) [PK-27A35EPDBQ](#) [PK-35A29W-24VQ](#) [14-810.910](#) [SC648](#) [SC628AN](#) [SC628N](#)
[SC110N](#) [SC628ANP](#) [HW1Z-P1F2PQ4Y](#) [PFD-27A35ERQ](#) [BNR1](#)