


MFB-1445SM

Passive MMIC 13.6-15.1 GHz Bandpass Filter

DEVICE OVERVIEW

General Description

The MFB-1445SM is a passive MMIC bandpass filter. It is an integrated filter that passes Ku-Band frequencies (13.6-15.1 GHz). Passive GaAs MMIC technology allows production of smaller filter constructions that replace larger form factor circuit board constructions. Tight fabrication tolerances allow for less unit to unit variation than traditional filter technologies. Low unit to unit variation allows for accurate simulations using the provided S2P file taken from measured production units. The MFB-1445SM is available as a 3 X 3 mm QFN package. Evaluation boards are also available.



[Download s-parameters here](#)

Features

- Designed for Ku-Band Applications including Satcom
- Excellent Return Loss
- High Stop Band Suppression
- Wide Stop Band

Applications

N/A

Functional Block Diagram



Part Ordering Options

Part Number	Description	Package	Green Status	Product Lifecycle	Export Classification
MFB-1445SM	Passive MMIC 13.6-15.1 GHz Bandpass Filter	QFN	RoHS REACH	Released	EAR99
<u>EVAL-MFB-1445</u>	Evaluation, Passive MMIC 13.6-15.1 GHz Bandpass Filter	EVAL	REACH RoHS	Released	EAR99

Table Of Contents

■ Device Overview	■ Specifications
General Description	Absolute Maximum Ratings
Features	Package Information
Applications	Electrical Specifications
Functional Block Diagram	Typical Performance Plots
■ Port Configuration and Functions	■ Mechanical Data
Port Diagram	Outline Drawing
Port Functions	■ Footprint Image
■ Revision History	■ Evaluation Board
	Evaluation Board Outline Drawing


Revision History

Revision Code	Revision Date	Comment
-	2021-01-01	Datasheet Initial Release




Port Configuration and Functions

Port Diagram

A bottom-up view of the MFB-1445SM package outline drawing is shown below. The MMIC bandpass filters are symmetrical allowing Pin 2 or Pin 11 to be used as the input.

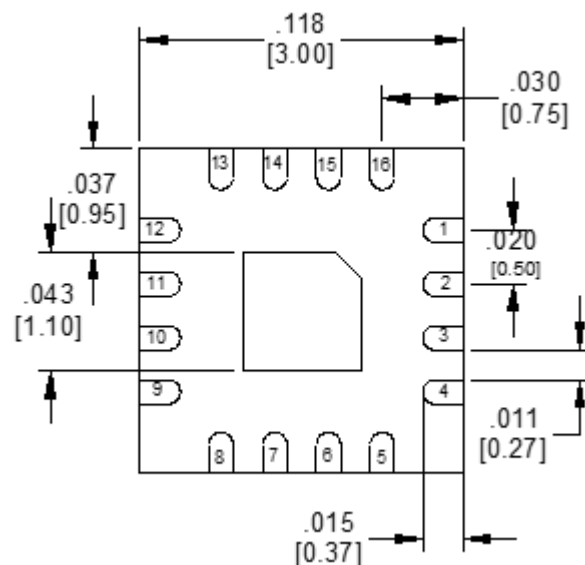

Port Functions

Port	Function	Description	Equivalent Circuit for Package
Pad	Ground	SM package ground path is provided through the ground paddle.	
Pin 11	Input/Output	Pin 11 is DC open to ground for the SM package.	
Pin 2	Input/Output	Pin 2 is DC open to ground for the SM package.	

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C
Power Handling, at any Port	30	dBm

Package Information

Parameter	Details	Rating
Dimensions	-	3 x 3 mm
Moisture Sensitivity Level	-	MSL 1

Electrical Specifications

The electrical specifications apply at TA=+25°C in a 50Ω system. Min and Max limits are guaranteed at TA=+25°C.






Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
1 dBc Passband	Configuration A, Temp = 25°C	13.51	15.13	-	-	-	GHz
3 dBc Passband	Configuration A, Temp = 25°C	13.28	15.41	-	-	-	GHz
30 dBc Rejection Point	Configuration A, Temp = 25°C	12.53	17.36	-	-	-	GHz
Center Freq	Configuration A, Temp = 25°C	-	-	-	14.30	-	GHz
Insertion Loss @ fc	Configuration A, Temp = 25°C	-	-	-	3.7	4.5	dB
Passband Return Loss	Configuration A, Temp = 25°C	-	-	-	23	-	dB
Group Delay	Configuration A, Temp = 25°C	-	-	-	620	-	ps
Impedance	Configuration A, Temp = 25°C	-	-	-	50	-	Ω
Stopband Suppression	-	17.5	17.5	30	35	-	dB
Stopband Suppression	-	18.5	18.5	35	40	-	dB
Stopband Suppression	-	12.5	12.5	30	35	-	dB
Stopband Suppression	-	11.5	11.5	35	45	-	dB

Filter is symmetrical. Reverse measurement is equivalent to forward measurement. All measured data is taken from the eval board without de-embedding of the connectors and traces.

MFB-1445SM

Passive MMIC 13.6-15.1 GHz Bandpass Filter

Typical Performance Plots

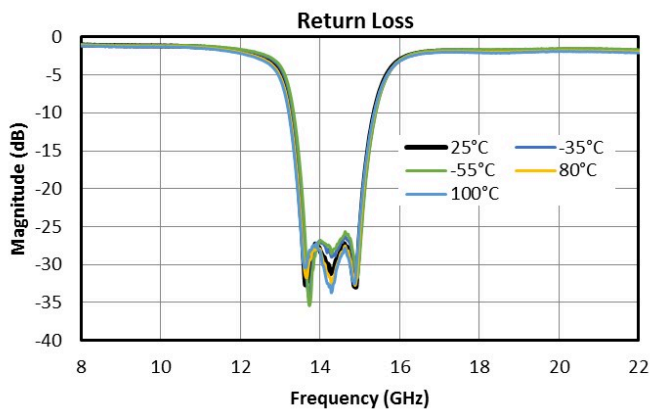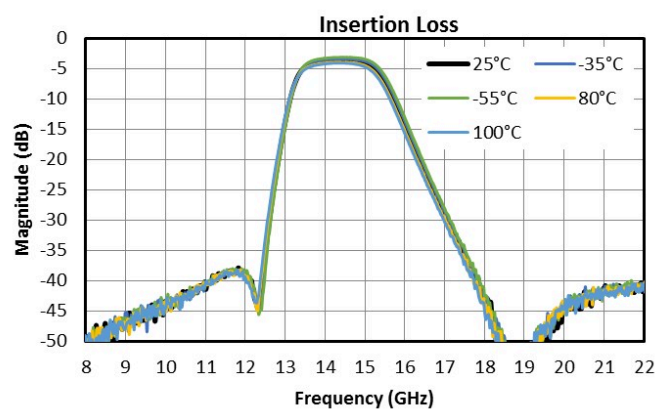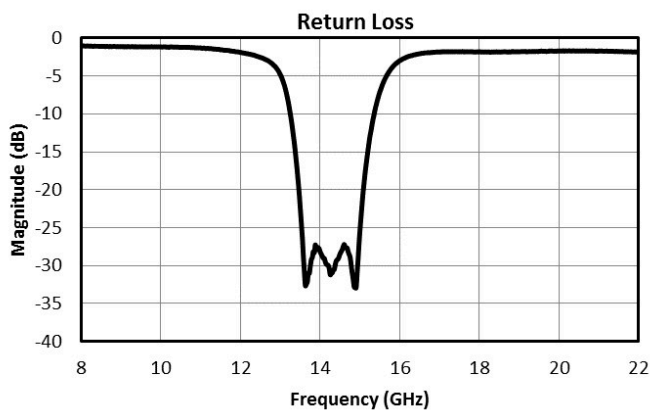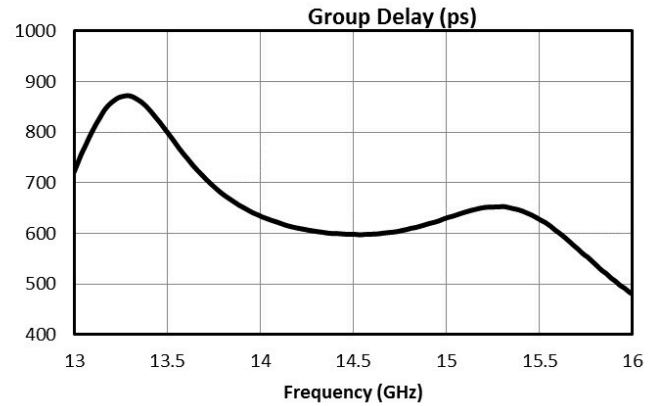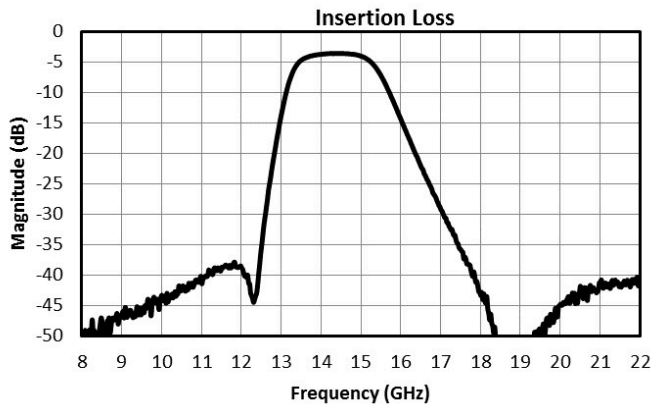


MFB-1445SM

Passive MMIC 13.6-15.1 GHz Bandpass Filter

Mechanical Data

Outline Drawing

Download : [Outline 2D Drawing](#) | [Outline 3D Drawing](#) | [Outline 3D STP](#)

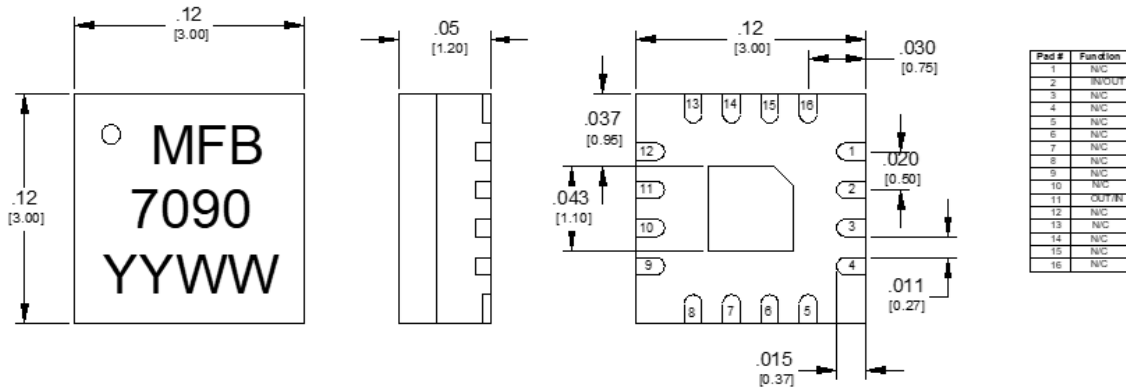

1. Substrate material is LCP.
2. I/O Leads and Ground paddle plating is (from base to finish):
Ni: 0.5um MIN
Pd: 0.02um MIN
Au: 0.05um MAX
3. All unconnected pins should be connected to PCB RF ground



MFB-1445SM

Passive MMIC 13.6-15.1 GHz Bandpass Filter

Footprint Image

Download : [Footprint Drawing](#)

3mm QFN Plastic 16 Lead
sample drawing

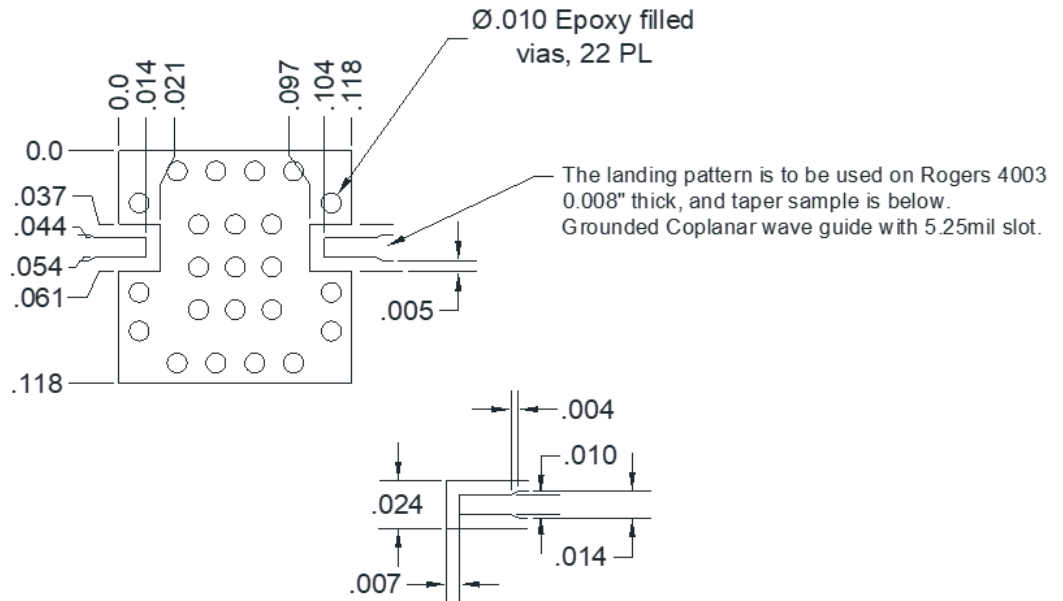

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Marki Microwave](#) manufacturer:

Other Similar products are found below :

[PD0409J5050S2HF](#) [AFS14A35-1591.50-T3](#) [AFS20A20-1227.60-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [MAPDCC0005](#)
[BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [X3C19F1-20S](#) [XC3500P-20S](#) [CDBLB455KCAX39-B0](#) [PD0922J5050D2HF](#)
[1E1305-3](#) [1F1304-3S](#) [BD1222J50200AHF](#) [BD1722J50100AHF](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [TP-101-PIN](#) [T-1000-N](#) [XC0900P-](#)
[10S](#) [XC0900B-30S](#) [11305-10](#) [5962-9091202MXA](#) [X3C06A4-03S](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#) [B39242B4360P810](#)
[B39781B8005P810](#) [B39881B8013P810](#) [B39771B8035P810](#) [B39741B8012P810](#) [B39212B8033P810](#) [B39162B8636P810](#) [SF2225E](#) [SF2275E](#)
[SF2395E](#) [SF2188D](#) [LFB182G45BG7D948](#) [SF2201E](#) [DC1722J5005AHF](#) [B39272B8818P810](#) [SF2253E](#) [SF2202E](#) [SF2182D](#) [SF2211E](#)
[SF2240E](#) [SF2307D](#)