

HCTSM100308BAL

High Clearance and Creepage Transformer



***RoHS
AEC-Q200 COMPLIANT**

Features

- Working voltage up to 1000 Vrms
- Hi-Pot: 4000 VDC, 1 mA, 60 s or 4400 VDC, 1 mA, 2 s
- Reinforced insulation
- Clearance/creepage distance >10 mm
- Overvoltage Category II, Pollution Degree 2, up to 2 km above sea level
- Complies with IEC/UL 60950-1, 62368-1
- AEC-Q200 compliant
- RoHS compliant*

Applications

- Battery Management Systems (BMS)
- Energy Storage Systems (ESS)
- CAN interface digital input modules
- RS-485 and RS-232 isolation
- Designed for isolation power supplies using TI SN6501 & SN6505B

Sustainability

- Small size reduces material use
- ISO 14001, low-impact energy
- Responsibly sourced and produced
- Meets EU 94/62/EC standards

Product Overview

The Bourns® Model HCTSM100308BAL transformer provides reinforced insulation with a working voltage up to 1000 V, a creepage/clearance distance of 10 mm+, and 4000 VDC

General Specifications

Specification	Value
Primary Inductance (100 kHz/1 V)	300 µH min.
Leakage Inductance (100 kHz/0.1 V) with Pin 2, 3 Shorted and Pin 5, 6, 7, 8 Shorted	0.7 µH max.
DCR	
1-3, 2-4	0.2 Ω max.
5-7, 6-8	0.45 Ω max.
Turns Ratio & Polarity (1-4):(8-5)	0.38 ± 5 %
Hi-pot (PRI.-SEC.)	
4000 VDC	1 mA, 60 s
4400 VDC	1 mA, 2 s
Working Voltage	Up to 1000 Vrms
Operating Temperature	-40 °C to +125 °C
Storage Temperature	-25 °C to +85 °C
Moisture Sensitivity Level	1
ESD Classification (HBM)	N/A

How to Order

Model **HCTSM100308B A L - E**

AEC-Q200 Compliancy Designator _____

RoHS Compliancy Designator _____


Packaging _____

E = 400 pcs. per 13-inch Reel, 5 Reels per Box

Packaging Specifications

Packaging	Pieces per 13-inch Reel
Tape & Reel	400

Electrical Schematic



Contact Information

	Phone	Email
Asia-Pacific	+886-2 2562-4117	asiacus@bourns.com
Europe	+36 88 885 877	eurocus@bourns.com
Mexico	+52 614 478 0400	mexicus@bourns.com
The Americas	+1-951 781-5500	americus@bourns.com

* RoHS Directive 2015/863, Mar 31, 2015 and Annex. Specifications are subject to change without notice. Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.


HCTSM100308BAL

High Clearance and Creepage
Transformer




*RoHS
AEC-Q200 COMPLIANT


Product Dimensions

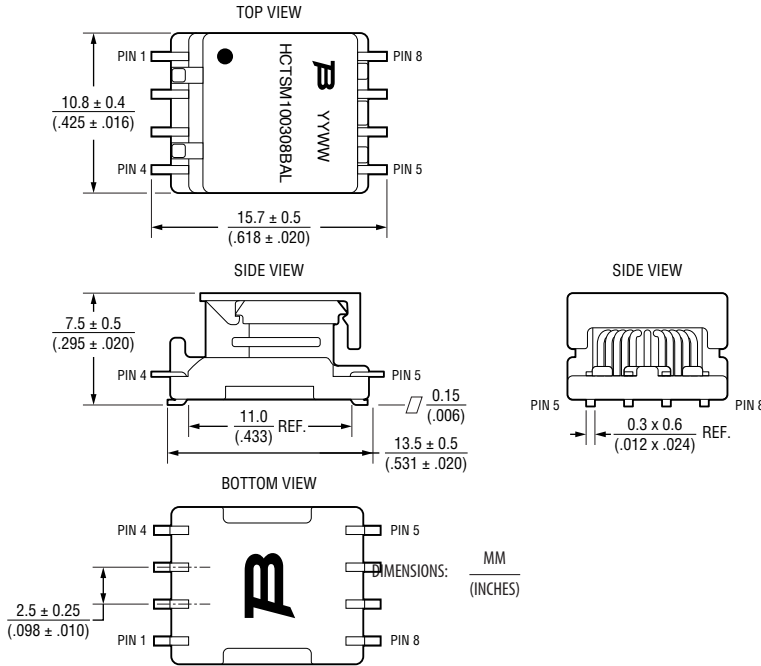

Recommended Layout

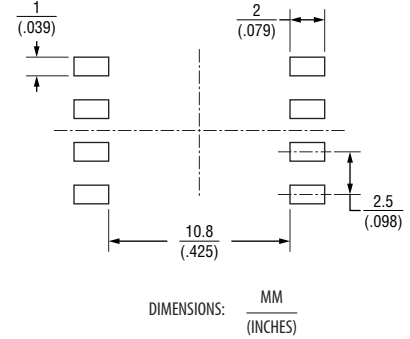

Solder Profile

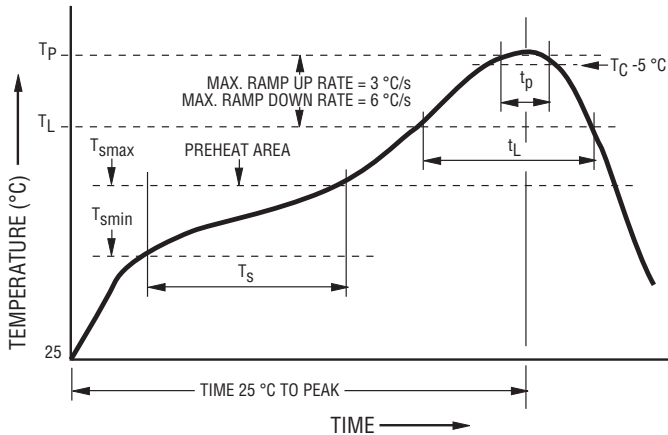

Profile Feature	Pb-Free Assembly
Preheat / Soak: Temperature Min. (T_{smin}) Temperature Max. (T_{smax}) Time (t_s) from (T_{smin} to T_{smax})	150 °C 200 °C 60~120 seconds
Ramp Up Rate (T_L to T_P)	3 °C / second max.
Liquidous Temperature (T_L) Time (t_L) maintained above T_L	217 °C 60~150 seconds
Peak Package Body Temperature (T_P)	$T_P \leq T_C$ (see table below)
Time (t_p)* within 5 °C of the specified classification temperature (T_C)	< 30 seconds
Ramp Down Rate (T_P to T_L)	6 °C / second max.
Time 25 °C to Peak Temperature	8 minutes max.

Pb-Free Process Classification Temperatures (T_C)

Package Thickness	Volume mm ³ < 350	Volume mm ³ 350 - 2000	Volume mm ³ > 2000
< 1.6 mm	260 °C	260 °C	260 °C
1.6 mm - 2.5 mm	260 °C	250 °C	245 °C
> 2.5 mm	250 °C	245 °C	245 °C

NOTE:

The product has been tested under this reflow condition. Deviations from this, especially higher temperatures for longer duration, could impact performance.

Refer to IPC/JEDEC J-STD-020


Specifications are subject to change without notice. Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.



Packaging Specifications

Specifications and tolerances comply with EIA-481 requirements.

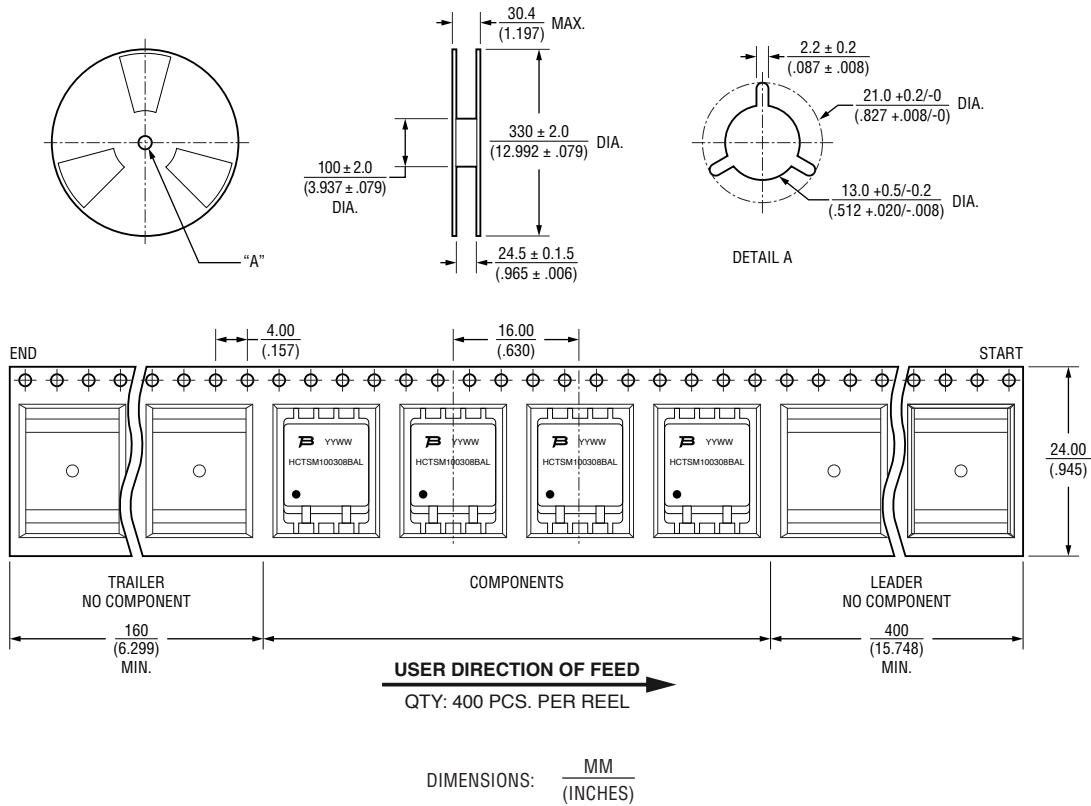

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Interface Development Tools](#) **category:**

Click to view products by [MaxLinear](#) **manufacturer:**

Other Similar products are found below :

[XR33052IDEVB](#) [XR21B1424IV64-0A-EVB](#) [P0551](#) [5346](#) [4901](#) [LIME2-SHIELD](#) [USB TO TTL](#) [USB TO RS485](#) [PL2303 USB UART Board \(type A\) V2](#) [USB-CAN-A](#) [MIKROE-5492](#) [5964](#) [TJA1145A-EVB](#) [2200002205](#) [Si86P541-KIT](#) [MXL86211C-EVK-1](#) [KIT6X02AP2T1](#) [MXL86112C-EVK-1](#) [103030295](#) [MIKROE-2335](#) [KIT_MINIWIGGLER_3_USB](#) [KITXMC4XCOMETH001TOBO1](#) [SI871XSOIC8-KIT](#) [1764](#) [1833](#) [1862](#) [EVALISO1I811TTOBO1](#) [EVB81107-A1](#) [EVB-USB82514](#) [ATAB663231A-V1.2](#) [2264](#) [PS09-EVA-KIT](#) [BOB-13263](#) [BP359C](#) [ORG4572-R01-UAR](#) [XR21B1420IL28-0A-EVB](#) [28030](#) [MIKROE-2750](#) [292](#) [DFR0065](#) [DFR0077](#) [DFR0504](#) [TEL0010](#) [TEL0038](#) [TEL0070](#) [ASI4UEVBV2P1](#) [MIKROE-2517](#) [MM930Mini](#) [PCI-7841](#) [BOB-13830](#)