

MEAGGG-SM GPS/GLONASS Screw Mount Part #: 100-00252-01

Description

The MEA-GGG-SM is a multi-frequency, high accuracy, GNSS antenna for the GPS & GLONASS. The antenna's excellent radiation pattern, exceptional out-of-band rejection, and low noise figure ensures optimal performance of GNSS systems. It features a 2 m cable with an integrated SMA, SMB, or MCX connector (customer choice). Our low-profile screw mount is ideal for robotics, rail, UAV, industrial and IOT applications. This antenna offers a ultra-low profile design with easy mounting and customizable cables and connector options.

Electrical Specifications

GPS/GLONASS Antenna - Passive Parameters	Parameter	Specifications	
	Standards	GPS/QZSS/Galileo	GLONASS
	Band (MHz)	1575	1602
	Frequency Range	1575.42 MHz	1598-1610 MHz
	Return Loss (dB)	<=-20	<=-15
	VSWR	<=1.2:1dB	<=1.4dB
	Efficiency (%)	~65	~68
	Peak Gain (dBIC)	~3.6	~3.9
	Average Gain (dB)	~1.8	~1.6
	Impedance (Ohm)	50	
	Radiation Pattern	Hemispherical	
GPS/GLONASS Antenna - Active Parameters	Parameter	Specifications	
	Standards	GPS/QZSS/Galileo	GLONASS
	Band (MHz)	1575	1602
	Frequency Range	1575.42 MHz	1598-1610 MHz
	Return Loss (dB)	<=-15 dB	
	Patch Size (mm)	25 x 25 x 4	
	Impedance (Ohm)	50	
	VSWR	<=1.4:1 dB	
	Radiation Pattern	Hemispherical	
	Polarization	RHCP	
	Saw Filter	Pre-Filter	
	Active Gain (dB)	28 @ 2.7 V	
	Voltage (V)	1.5 – 3.6	
	Current (mA)	9 @2.7V	
	Out of Band Rejection (dB)	~43	
	ESD Protection	6	
	Connector Type	SMA-Male Standard (Other Connectors Available)	
	Cable Length	200cm Standard (Any Cable Length Available)	
	Cable Type	LMR100 Standard (Other Cables Available)	



Features



- GPS /QZSS/Galileo - 1575 MHz
- Easy mounting: Screw Mount
- Ground Plane Independent
- Pre-Filter
- Customizable Cable and Connector
- IP69K




Applications


- Vehicle and fleet tracking
- Military & security
- Asset tracking
- Embedded applications
- Navigation devices
- Oil & gas industries
- Mining equipment
- LBS & M2M applications
- Law enforcement

Mechanical Specifications

Parameter	Specifications
Antenna Dimensions (mm)	Ø 52 × 17.5
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Mounting Type	Screw Mount
Radome Type/Color	ASA/ Black
Substance Compliance	RoHS
Antenna Base	ASA/ Black
Max. Tighten Torque (Nm)	4 Nm
Certificates	IP69K

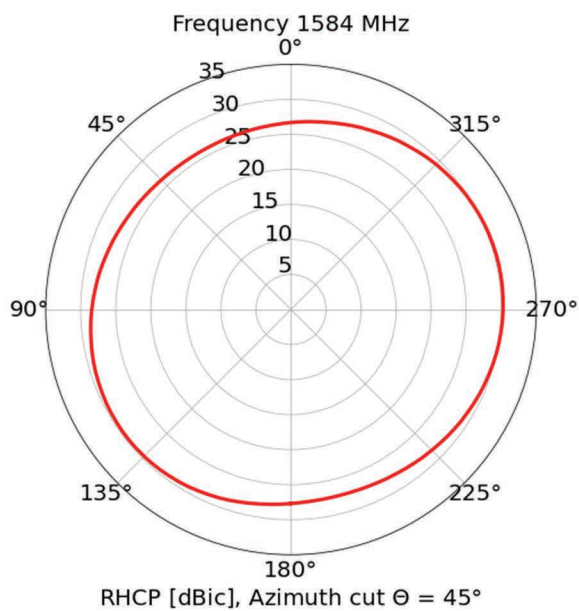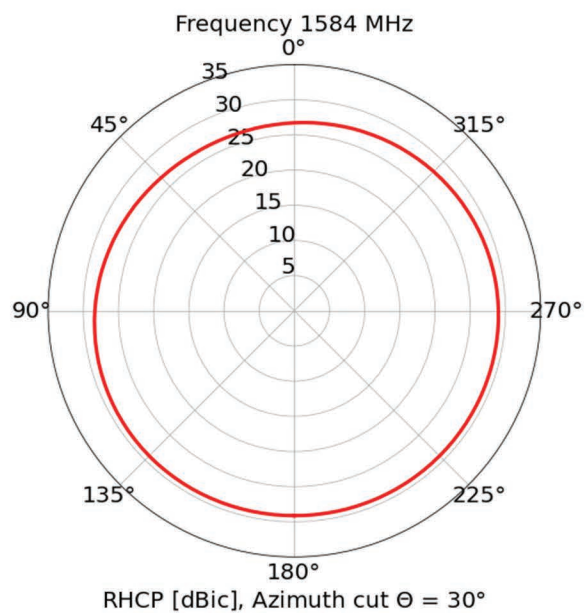

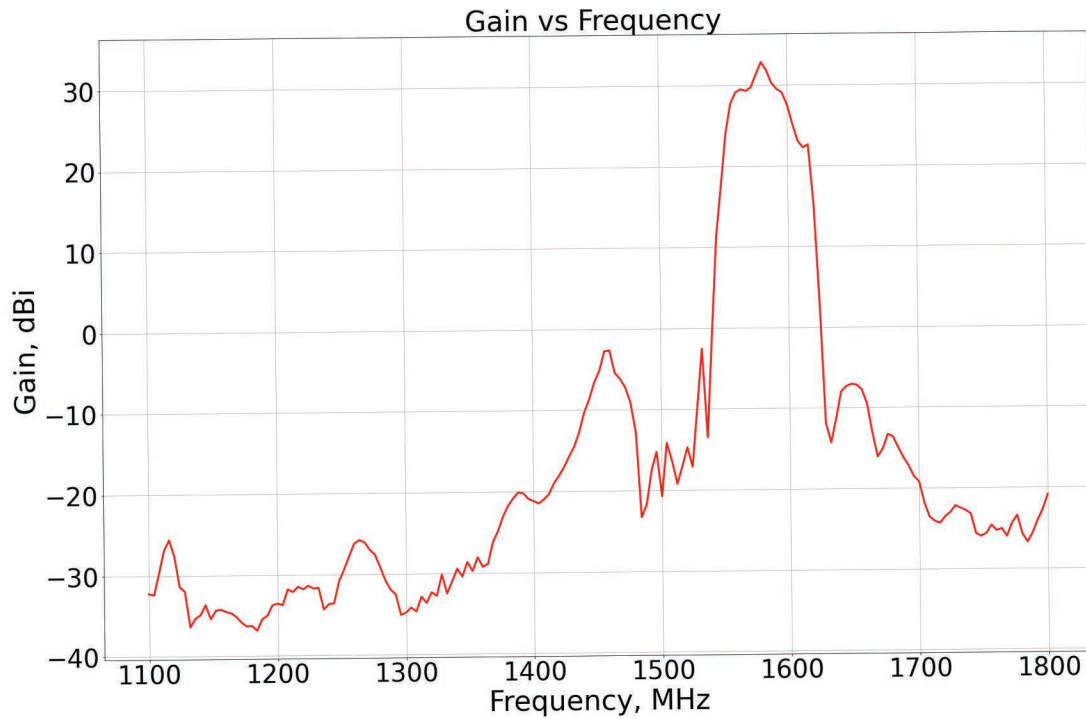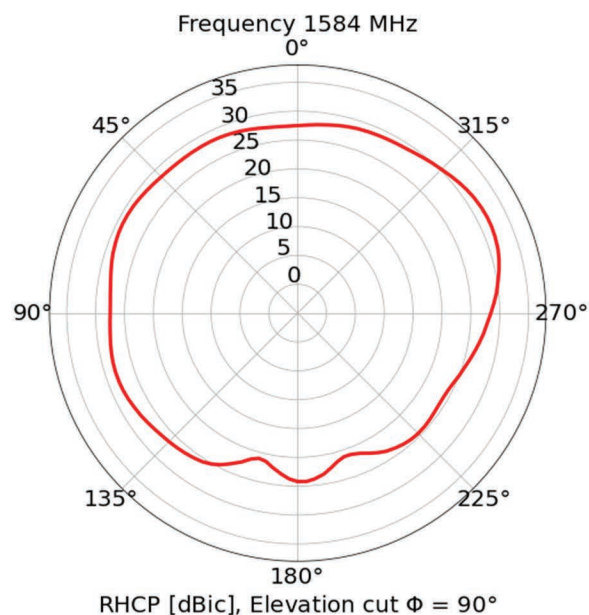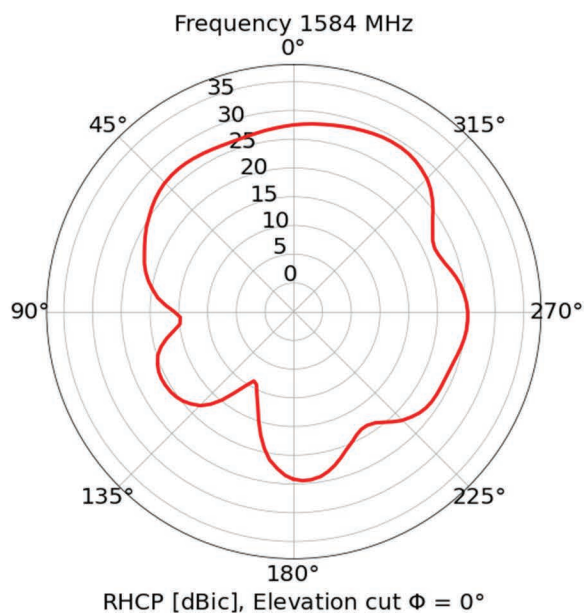

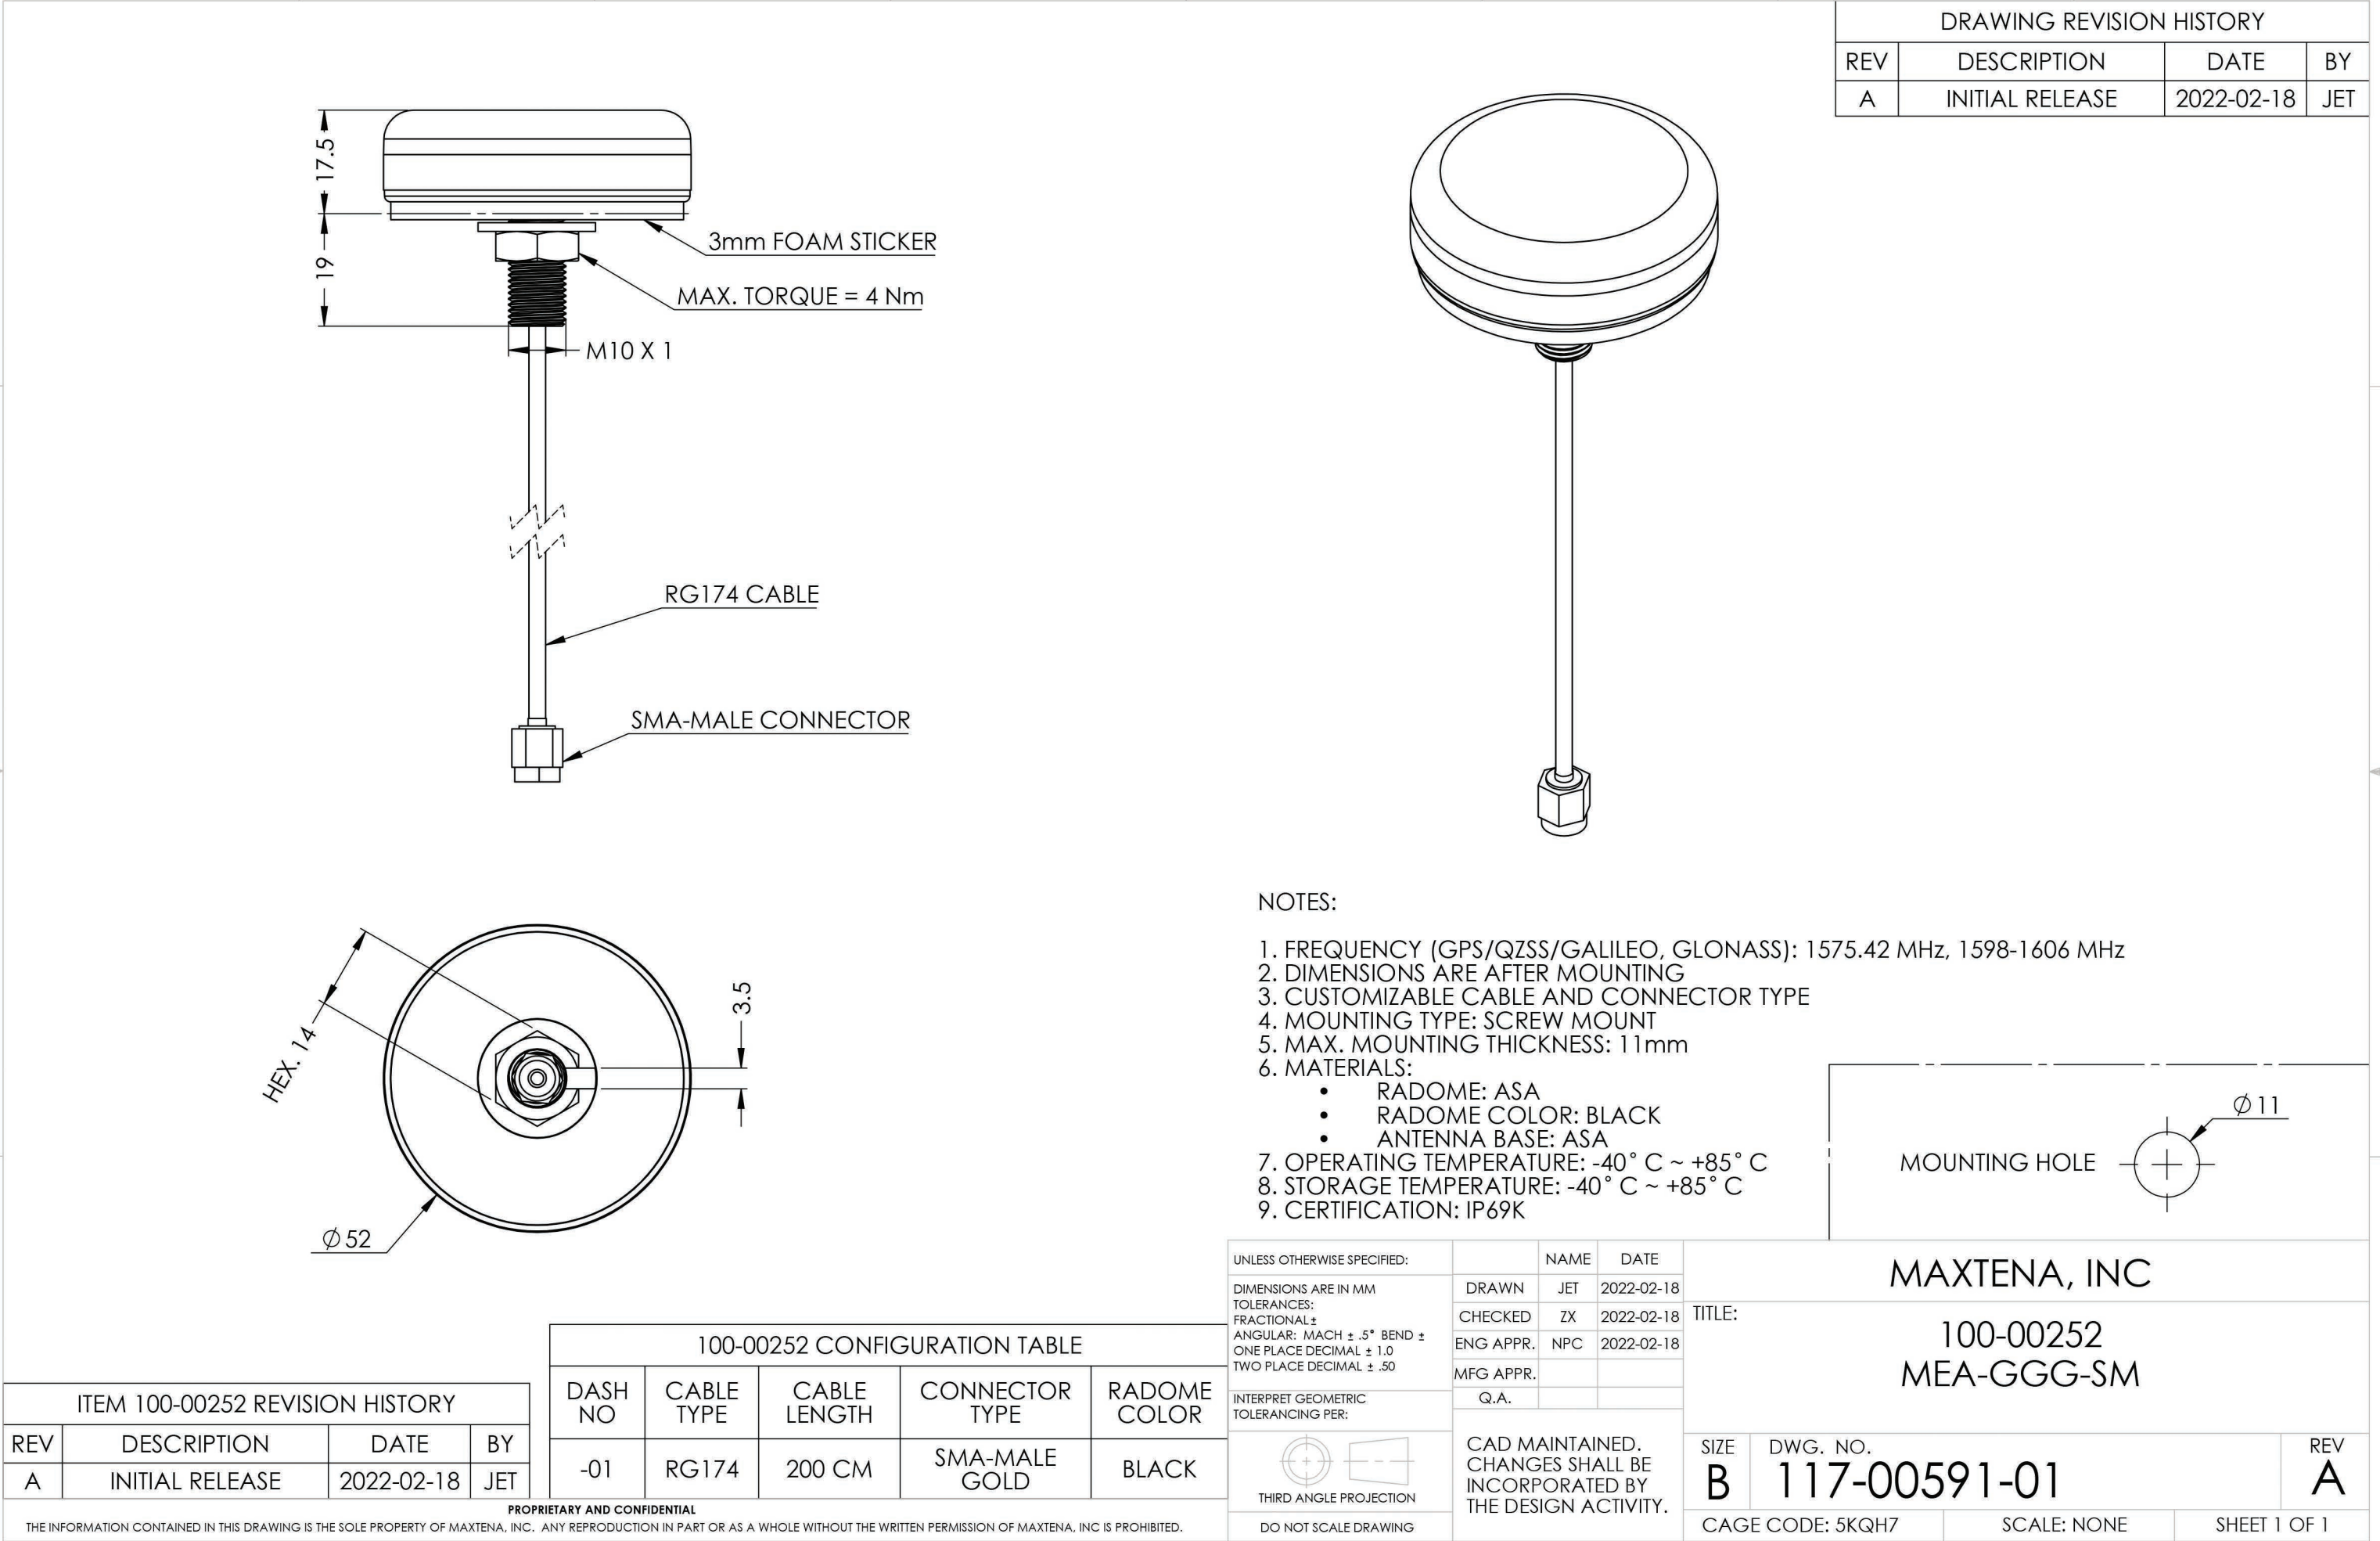

DRAWING REVISION HISTORY			
REV	DESCRIPTION	DATE	BY
A	INITIAL RELEASE	2022-02-18	JET

ITEM 100-00252 REVISION HISTORY			
REV	DESCRIPTION	DATE	BY
A	INITIAL RELEASE	2022-02-18	JET

100-00252 CONFIGURATION TABLE				
DASH NO	CABLE TYPE	CABLE LENGTH	CONNECTOR TYPE	RADOME COLOR
-01	RG174	200 CM	SMA-MALE GOLD	BLACK

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN MM	DRAWN	JET	2022-02-18
TOLERANCES:	CHECKED	ZX	2022-02-18
FRACTIONAL ±	ENG APPR.	NPC	2022-02-18
ANGULAR: MACH ± .5° BEND ±	MFG APPR.		
ONE PLACE DECIMAL ± 1.0	Q.A.		
TWO PLACE DECIMAL ± .50			
INTERPRET GEOMETRIC TOLERANCING PER:	CAD MAINTAINED. CHANGES SHALL BE INCORPORATED BY THE DESIGN ACTIVITY.		
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			

MAXTENA, INC			
TITLE: 100-00252 MEA-GGG-SM			
SIZE B	DWG. NO. 117-00591-01	REV A	
CAGE CODE: 5KQH7		SCALE: NONE	SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MAXTENA, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MAXTENA, INC IS PROHIBITED.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Maxtena](#) manufacturer:

Other Similar products are found below :

[108-00014-50](#) [66089-2406](#) [A09-F8NF-M](#) [RGFRA1903041A1T](#) [108-00016-050](#) [W1049B090](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [0600-00060](#)
[GD53-25](#) [S9025PLSMF](#) [GPSCPMM00](#) [ANTDOM-05-01-WPM](#) [ANT-WP868SMA-Y](#) [CBNC58](#) [ABFT](#) [LP800NMOW](#) [NMOQ88C](#)
[NMOQB](#) [NMOQC](#) [ANT-GSMGPSPUKS](#) [60210](#) [60140](#) [ANT-8WPIG-UFL](#) [A21H0](#) [29000863](#) [29000848](#) [955179003](#) [22100003](#) [DL-T022-](#)
[2.4G](#) [DL-T023-4G](#) [T1-915M](#) [DL-T021-2.4GW](#) [DL-T021-2.4G](#) [BWGNSCNX16-6B1Y2L120](#) [BWGNSCNX15-15B1Y4L120](#) [DL-T023-4GW](#)
[J008-GSM](#) [3N0401LG-021](#) [KHA\(RG1.13\)-TX90B-IPEX](#) [KH-GPS181804-WY](#) [TX5800-JZ-5](#) [3E0402BK-004](#) [3E0301BK-006](#) [PRO-OB-440](#)
[ACR0301U](#) [BWGNSCNX9-9B1Y4L120](#) [BWGPSCNX20-20B1Y4L120](#) [DL-J023-5GB](#) [3N0101BK-017](#)