
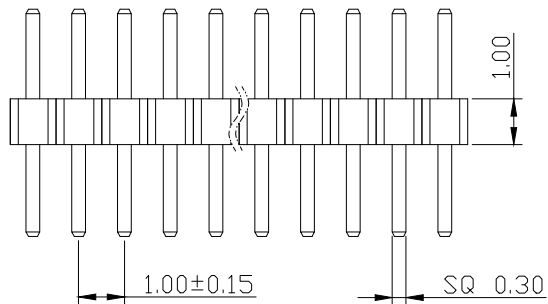


## SPECIFICATIONS

Current Rating: 0.75 Amps  
Withstanding Voltage: AC 500V  
Insulation Resistance: 1000M $\Omega$  Min  
Contact Resistance: 20m $\Omega$  Max  
Operation Temperature: -40° to +105°  
Insulator Material: Polyester (UL94V-0)  
Contact Material: Brass  
Standard: PA6T  
Contact Plating: Gold Flash  
Max. Processing Temp: 240° C for 30-60 seconds  
(260° C for 5 seconds)

## RECOMMEND P. C. B LAYOUT

PCB TOLERANCE:  $\pm 0.05$  (TOP VIEW)

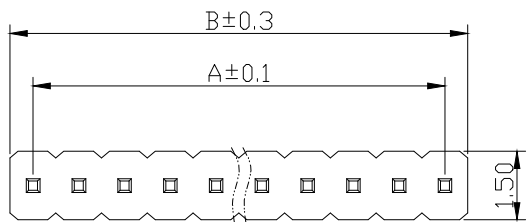

兆星精密电子 (深圳) 有限公司

UNLESS OTHERWISE SPECIFIED TOLERANCE

X :  $\pm 0.30$  X° :  $\pm 5^\circ$   
X.X :  $\pm 0.25$  X.X° :  $\pm 1^\circ$   
X.XX :  $\pm 0.20$  X.XX° :  $\pm 0.5^\circ$

DRAWN NAME: 1.0PH H1.0 1xnPin 180度 W1.5 PC2.0 PA2.0 PB1.0 L5.0 6T

|      |    |       |      |            |                  |      |     |
|------|----|-------|------|------------|------------------|------|-----|
| SIZE | A4 | SCALE | N: 1 | PROUCT NO. | ZX-PZ1.0-1-n*PZZ |      |     |
| REV  | A  | UNIT  | mm   | PROJECT    |                  | PAGE | 1/1 |

CHECKED: R R 2023/08/25 CHECKED: / / APPROVED: / /

| No. of | DIM. A | DIM. B | No. of | DIM. A | DIM. B | No. of | DIM. A | DIM. B | No. of | DIM. A | DIM. B |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 1      | 0.00   | 1.00   | 11     | 10.00  | 11.00  | 21     | 20.00  | 21.00  | 31     | 30.00  | 31.00  |
| 2      | 1.00   | 2.00   | 12     | 11.00  | 12.00  | 22     | 21.00  | 22.00  | 32     | 31.00  | 32.00  |
| 3      | 2.00   | 3.00   | 13     | 12.00  | 13.00  | 23     | 22.00  | 23.00  | 33     | 32.00  | 33.00  |
| 4      | 3.00   | 4.00   | 14     | 13.00  | 14.00  | 24     | 23.00  | 24.00  | 34     | 33.00  | 34.00  |
| 5      | 4.00   | 5.00   | 15     | 14.00  | 15.00  | 25     | 24.00  | 25.00  | 35     | 34.00  | 35.00  |
| 6      | 5.00   | 6.00   | 16     | 15.00  | 16.00  | 26     | 25.00  | 26.00  | 36     | 35.00  | 36.00  |
| 7      | 6.00   | 7.00   | 17     | 16.00  | 17.00  | 27     | 26.00  | 27.00  | 37     | 36.00  | 37.00  |
| 8      | 7.00   | 8.00   | 18     | 17.00  | 18.00  | 28     | 27.00  | 28.00  | 38     | 37.00  | 38.00  |
| 9      | 8.00   | 9.00   | 19     | 18.00  | 19.00  | 29     | 28.00  | 29.00  | 39     | 38.00  | 39.00  |
| 10     | 9.00   | 10.00  | 20     | 19.00  | 20.00  | 30     | 29.00  | 30.00  | 50     | 49.00  | 50.00  |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [Headers & Wire Housings](#) *category:*

*Click to view products by* [Megastar](#) *manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)  
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)  
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)  
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)  
[803-43-024-10-001000](#)