

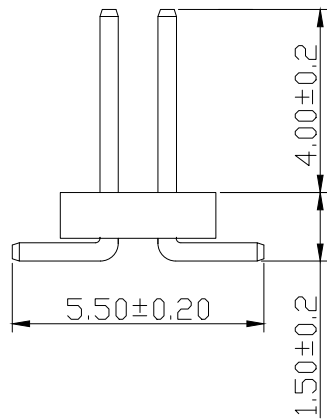
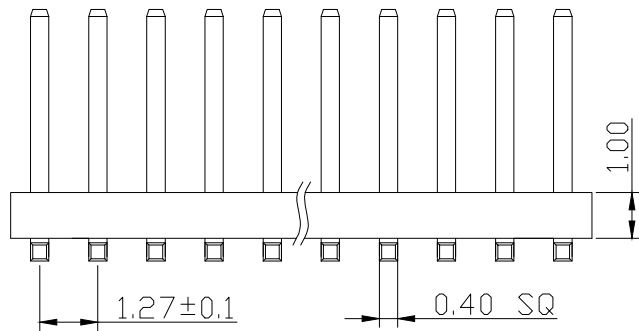


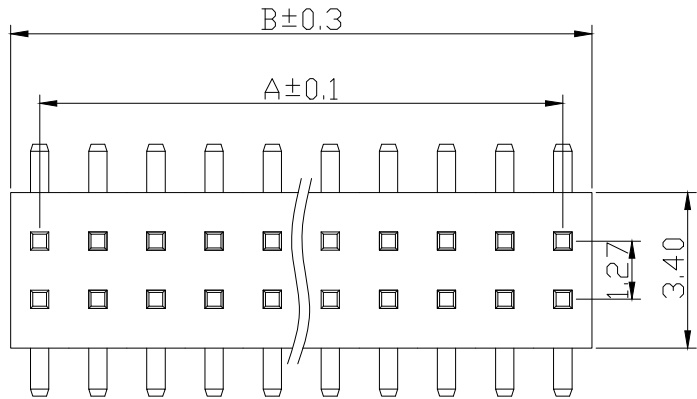

## SPECIFICATIONS

Current Rating: 1.0 Amps  
Withstanding Voltage: AC 500V  
Insulation Resistance: 1000M $\Omega$  Min  
Contact Resistance: 20m $\Omega$  Max  
Operation Temperature: -40° to +105°  
Insulator Material: Polyester (UL94V-0)  
Contact Material: Brass  
Standard: PA6T  
Contact Plating: Gold Flash  
Max. Processing Temp: 240° C for 30-60 seconds  
(260° C for 5 seconds)

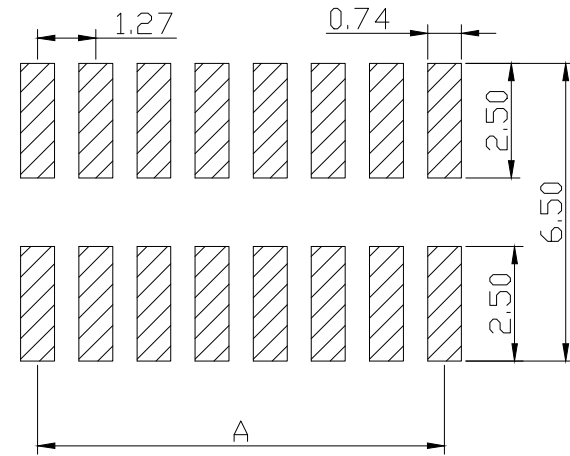

## RECOMMEND P. C. B LAYOUT

PCB TOLERANCE:  $\pm 0.05$  (TOP VIEW)



兆星精密电子 (深圳) 有限公司

UNLESS OTHERWISE SPECIFIED TOLERANCE

X :  $\pm 0.30$  X° :  $\pm 5^\circ$   
X.X :  $\pm 0.25$  X.X° :  $\pm 1^\circ$   
X.XX :  $\pm 0.20$  X.XX° :  $\pm 0.5^\circ$

DRAWN NAME: 1.27PH H1.0 2xnpin SMT W3.4 PC5.5 PA4.0 PB1.5 L7.2 6T

SIZE A4 SCALE N: 1 PROUCT NO. ZX-PZ1.27-2-n\*PWZ  
REV A UNIT mm PROJECT  PAGE 1/1

CHECKED: R R 2023/08/25 CHECKED: / / APPROVED: / /

| No. of | DIM. A | DIM. B | No. of | DIM. A | DIM. B | No. of | DIM. A | DIM. B | No. of | DIM. A | DIM. B | No. of | DIM. A | DIM. B |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 1      | —      | —      | 11     | 12.70  | 13.97  | 21     | 25.40  | 26.67  | 31     | 38.10  | 39.37  | 41     | 50.80  | 52.07  |
| 2      | 1.27   | 2.54   | 12     | 13.97  | 15.24  | 22     | 26.67  | 27.94  | 32     | 39.37  | 40.64  | 42     | 52.07  | 53.34  |
| 3      | 2.54   | 3.81   | 13     | 15.24  | 16.51  | 23     | 27.94  | 29.21  | 33     | 40.64  | 41.91  | 43     | 53.34  | 54.61  |
| 4      | 3.81   | 5.08   | 14     | 16.51  | 17.78  | 24     | 29.21  | 30.48  | 34     | 41.91  | 43.18  | 44     | 54.61  | 55.88  |
| 5      | 5.08   | 6.35   | 15     | 17.78  | 19.05  | 25     | 30.48  | 31.75  | 35     | 43.18  | 44.45  | 45     | 55.88  | 57.15  |
| 6      | 6.35   | 7.62   | 16     | 19.05  | 20.32  | 26     | 31.75  | 33.02  | 36     | 44.45  | 45.72  | 46     | 57.15  | 58.42  |
| 7      | 7.62   | 8.89   | 17     | 20.32  | 21.59  | 27     | 33.02  | 34.29  | 37     | 45.72  | 46.99  | 47     | 58.42  | 59.69  |
| 8      | 8.89   | 10.16  | 18     | 21.59  | 22.86  | 28     | 34.29  | 35.56  | 38     | 46.99  | 48.26  | 48     | 59.69  | 60.96  |
| 9      | 10.16  | 11.43  | 19     | 22.86  | 24.13  | 29     | 35.56  | 36.83  | 39     | 48.26  | 49.53  | 49     | 60.96  | 62.23  |
| 10     | 11.43  | 12.70  | 20     | 24.13  | 25.40  | 30     | 36.83  | 38.10  | 40     | 49.53  | 50.80  | 50     | 62.23  | 63.50  |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for*** [Headers & Wire Housings](#) ***category:***

***Click to view products by*** [Megastar](#) ***manufacturer:***

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)  
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)  
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)  
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)  
[803-43-024-10-001000](#)