



200 and 500 mA Schottky Barrier Rectifier

Qualified per MIL-PRF-19500/610

Qualified Levels*:
JAN, JANTX,
JANTXV and JANS

DESCRIPTION

The 1N6675UR-1 through 1N6677UR-1 series of Schottky barrier rectifiers provides a selection of 200 or 500 mA ratings in surface mount, hard glass DO-213AA MELF package. The 1N6677UR-1 is also available in JAN, JANTX, JANTXV, and JANS military qualifications.

Important: For the latest information, visit our website <http://www.microsemi.com>.

FEATURES

- JEDEC registered 1N6675 through 1N6677 number series.
- Hermetically sealed.
- Metallurgically bonded.
- Double plug construction.
- *JAN, JANTX, JANTXV and JANS qualifications are available per MIL-PRF-19500/610 on 1N6677UR-1 only.
- RoHS compliant versions are available on all commercial types.


APPLICATIONS / BENEFITS

- Leadless package for surface mounting.
- Ideal for high-density situations.
- Non-sensitive to ESD per MIL-STD-750 method 1020.

MAXIMUM RATINGS @ $T_A = 25^\circ\text{C}$ unless otherwise stated

Parameters/Test Conditions	Symbol	Value	Unit
Junction Temperature	T_J	-65 to +125	$^\circ\text{C}$
Storage Temperature	T_{STG}	-65 to +150	$^\circ\text{C}$
Thermal Resistance, Junction-to-End Cap	$R_{\theta JEC}$	100	$^\circ\text{C/W}$
Surge Peak Forward Current at 8.3 ms half-sine wave for 1N6677UR-1	I_{FSM}	5	A (pk)
Average Rectified Output Current: 1N6675UR-1 – 1N6677UR-1 ⁽¹⁾ CDLL0.5A20 – CDLL0.5A40	I_O	200 500	mA
Solder Temperature @ 10 s		260	$^\circ\text{C}$

NOTES: 1. See [Figure 1](#) for derating.



**DO-213AA MELF
Package**

Also available in:

 **DO-35 (DO-204AH)
package**
(axial-leaded)
[1N6675-1 – 1N6677-1](#)

MSC – Lawrence

6 Lake Street,
Lawrence, MA 01841
1-800-446-1158
Tel: (978) 620-2600
Fax: (978) 689-0803

MSC – Ireland




Gort Road Business Park,
Ennis, Co. Clare, Ireland
Tel: +353 (0) 65 6840044
Fax: +353 (0) 65 6822298

Website:

www.microsemi.com

MECHANICAL and PACKAGING

- CASE: Hermetically sealed glass case package.
- TERMINALS: Tin/lead plated or RoHS compliant matte-tin (commercial grade only) over copper clad steel. Solderable per MIL-STD-750, method 2026.
- POLARITY: Cathode end is banded.
- MOUNTING: The axial coefficient of expansion (COE) of this device is approximately +6PPM/°C. The COE of the mounting surface system should be selected to provide a suitable match with this device.
- MARKING: Part number.
- TAPE & REEL option: Standard per EIA-296. Consult factory for quantities.
- WEIGHT: Approximately 0.04 grams.
- See [Package Dimensions](#) on last page.

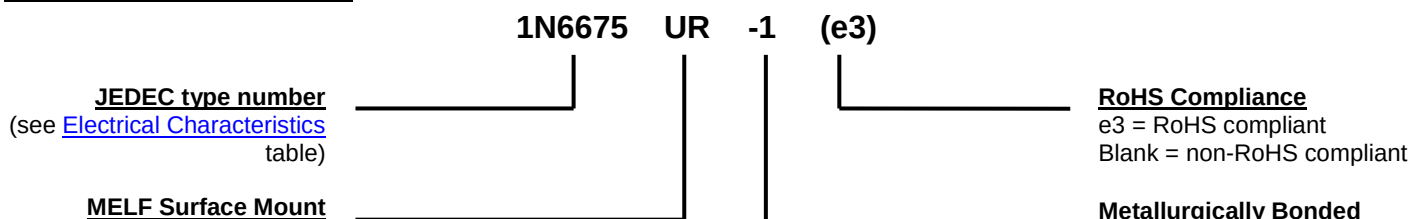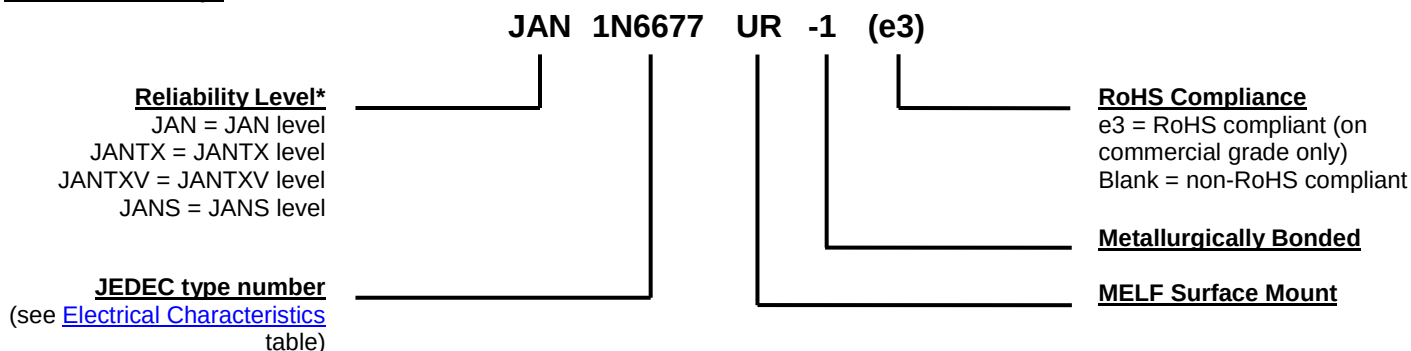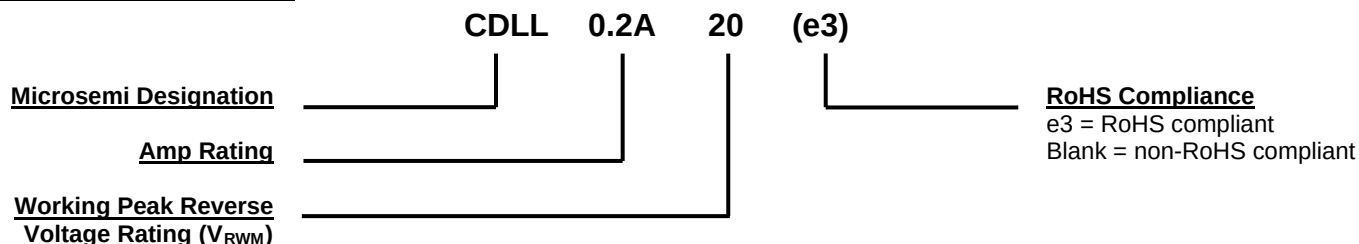PART NOMENCLATURE
1N6675UR-1 – 1N6677UR-1:

1N6677UR-1 only:

CDLL0.5A20 – CDLL0.5A40:


SYMBOLS & DEFINITIONS

Symbol	Definition
C	Capacitance: The capacitance in pF at a frequency of 1 MHz and specified voltage.
f	frequency
I_R	Reverse Current: The dc current flowing from the external circuit into the cathode terminal at the specified voltage V_R .
I_{FSM}	Surge Peak Forward Current: The forward current including all nonrepetitive transient currents but excluding all repetitive transients (ref JESD282-B)
I_O	Average Rectified Output Current: The Output Current averaged over a full cycle with a 50 Hz or 60 Hz sine-wave input and a 180 degree conduction angle.
$V_{(BR)}$	Breakdown Voltage: A voltage in the breakdown region.
V_F	Forward Voltage: A positive dc anode-cathode voltage the device will exhibit at a specified forward current.
V_R	Reverse Voltage: A positive dc cathode-anode voltage below the breakdown region.
V_{RWM}	Working Peak Reverse Voltage: The peak voltage excluding all transient voltages (ref JESD282-B). Also sometimes known historically as PIV.

ELECTRICAL CHARACTERISTICS @ 25 °C unless otherwise specified
200 mA options:

TYPE NUMBER (Note 1)	WORKING PEAK REVERSE VOLTAGE	MAXIMUM FORWARD VOLTAGE	MAXIMUM FORWARD VOLTAGE	MAXIMUM FORWARD VOLTAGE	MAXIMUM REVERSE LEAKAGE CURRENT I_{RM} @ V_{RM}		MAXIMUM CAPACITANCE @ $V_R = 0$ VOLTS $f = 1.0$ MHz
	V_{RWM}	V_F @ 20 mA	V_F @ 200 mA	V_F @ 630 mA	$T_J = +25$ °C	$T_J = 100$ °C	C_T
	V (pk)	Volts	Volts	Volts	µA	mA	pF
1N6675UR-1	20	0.37	0.50	0.70	5.0	0.60	50
1N6676UR-1	30	0.37	0.50	0.70	5.0	0.60	50
1N6677UR-1	40	0.37	0.50	0.70	5.0	0.60	50

NOTE: 1. These numbers can also be ordered as CDLL6675 or CDLL0.2A20, CDLL6676 or CDLL0.2A30, and CDLL6677 or CDLL0.2A40.

500 mA options:

TYPE NUMBER	WORKING PEAK REVERSE VOLTAGE	MAXIMUM FORWARD VOLTAGE	MAXIMUM FORWARD VOLTAGE	MAXIMUM REVERSE LEAKAGE CURRENT I_{RM} @ V_{RM}		MAXIMUM CAPACITANCE @ $V_R = 0$ VOLTS $f = 1.0$ MHz
	V_{RWM}	V_F @ 100 mA	V_F @ 500 mA	$T_J = +25$ °C	$T_J = 100$ °C	C_T
	V (pk)	Volts	Volts	µA	mA	pF
CDLL0.5A20	20	0.50	0.65	10.0	1.0	50
CDLL0.5A30	30	0.50	0.65	10.0	1.0	50
CDLL0.5A40	40	0.50	0.65	10.0	1.0	50

GRAPHS

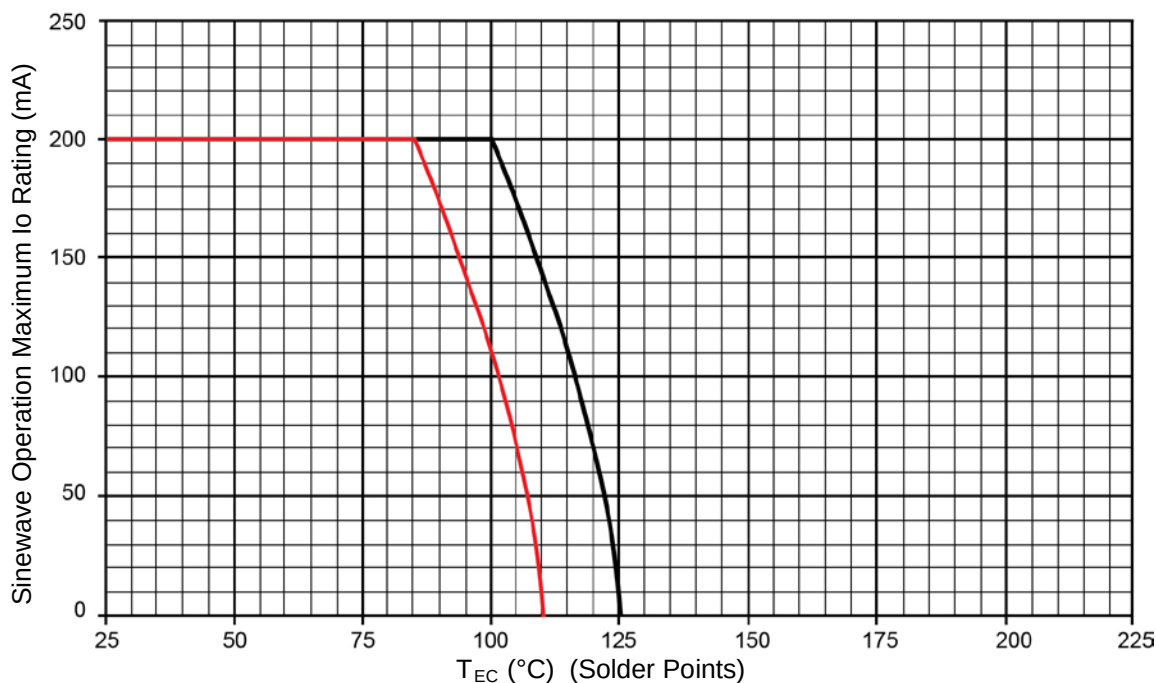


FIGURE 1
Temperature power derating for 1N6677UR-1

NOTES:

1. Maximum theoretical derate design curve. This is the true inverse of the worst case thermal resistance value. All devices are capable of operating at $\leq T_J$ specified on this curve. Any parallel line to this curve will intersect the appropriate power for the desired maximum T_J allowed.
2. Derate design curve constrained by the maximum junction temperatures and power rating specified. (See [Maximum Ratings](#).)
3. Derate design curve chosen at $T_J \leq 110^\circ\text{C}$ to show power rating where most users want to limit T_J in their application.

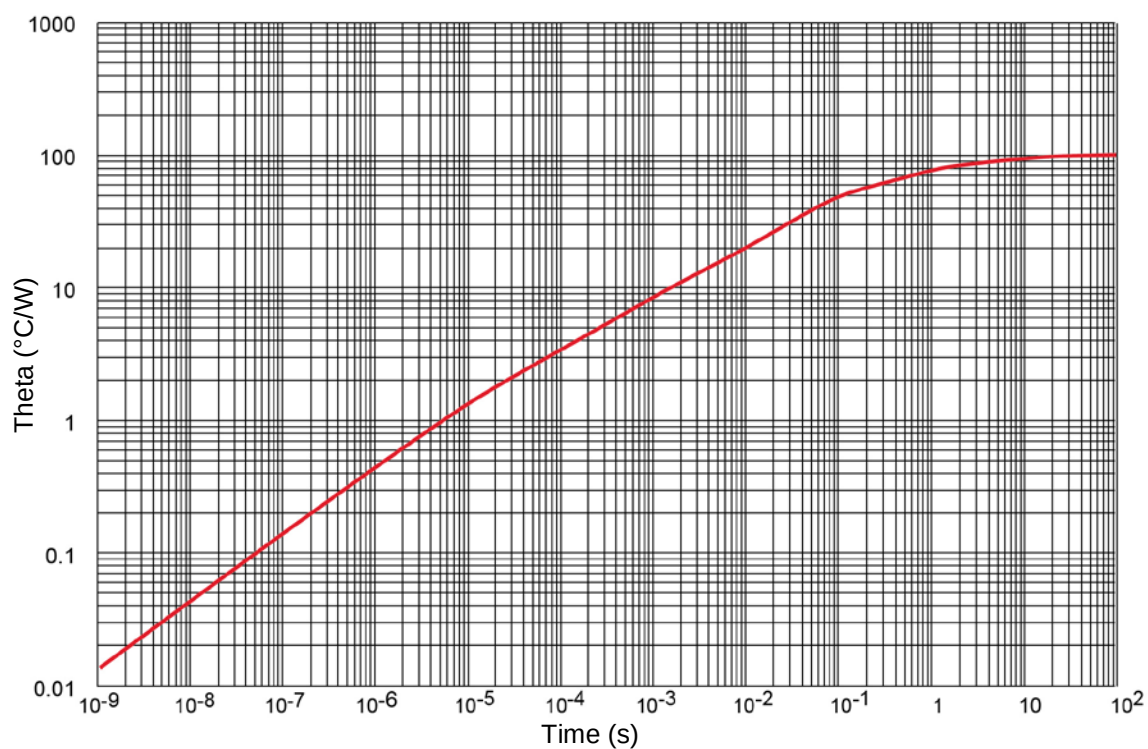
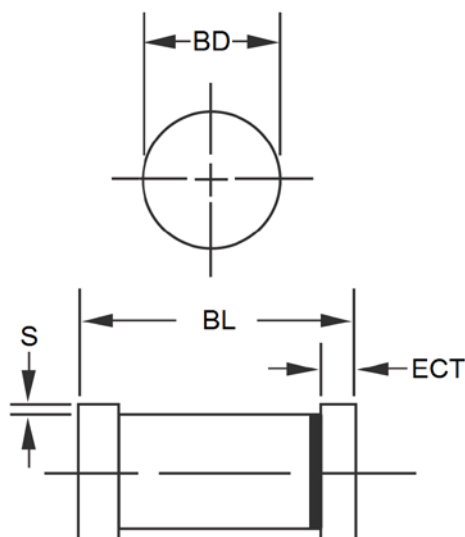
GRAPHS


FIGURE 2
Thermal impedance curve for 1N6677UR-1

PACKAGE DIMENSIONS


DIM	INCH		MILLIMETERS	
	MIN	MAX	MIN	MAX
BD	0.063	0.067	1.60	1.70
BL	0.130	0.146	3.30	3.71
ECT	0.016	0.022	0.41	0.56
S	0.001	-	0.03	-

NOTES:

1. Dimensions are in inches. Millimeters are given for information only.
2. Dimensions are pre-solder dip.
3. Referencing to dimension S, minimum clearance of glass body to mounting surface on all orientations.
4. In accordance with ASME Y14.5M, diameters are equivalent to Φ x symbology.

PAD LAYOUT


	INCH	mm
A	0.200	5.08
B	0.055	1.40
C	0.080	2.03

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [Microchip](#) manufacturer:

Other Similar products are found below :

[MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [RB551V-30](#)
[BAS16E6433HTMA1](#) [BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SK310-T](#)
[SK32A-LTP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#) [MBRB30H30CT-1G](#) [SB007-03C-TB-](#)
[E](#) [SK32A-TP](#) [SK33B-TP](#) [SK38B-TP](#) [NRVBM120LT1G](#) [NTE505](#) [NTSB30U100CT-1G](#) [SS15E-TP](#) [VS-6CWQ10FNHM3](#) [ACDBA1100LR-](#)
[HF](#) [ACDBA1200-HF](#) [ACDBA140-HF](#) [ACDBA2100-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [CDBQC0240LR-HF](#) [ACDBA260LR-HF](#)
[ACDBA1100-HF](#) [SK310B-TP](#) [MA4E2502L-1246](#) [MA4E2502H-1246](#) [NRVBM120ET1G](#) [NSR01L30MXT5G](#) [NTE573](#) [NTE6081](#) [SB560](#)
[PMAD1108-LF](#)