

PD-OUT/SP11

Outdoor PoE Lighting Surge Protector



PD-OUT/SP11 Specifications


No. of Ports	1
Pass Through Data Rates	10/100/1000 Mbps
Surge Handling Capability	10kv, 5kA to ground in 8/20 μ s, 800v, 100A PoE
DC Input	Input Power: 95W maximum Input Current: 2A max
Dimensions	30 mm (W) x 30 mm (H) x 190 mm (L) 1.18 in. x 1.18 in. x 7.48 in
Weight	.6 lbs (270g)
Connectors	Shielded RJ-45
Environmental Conditions	Operating Ambient Temperature: -40° to 185°F (-40 to 85°C) Operating Humidity: Maximum 95%, Non-condensing Storage Temperature: -40° to 185°F (-40 to 85°C) Storage Humidity: Maximum 95%, Non-condensing
Reliability	MTBF: 400,000 hrs. @25°C
Warranty	1-year
Regulatory Compliance	REACH, RoHS, WEEE, IEC60529 level IP66, NEMA 250, level 4x
Immunity to Surges	IEC61643-21, GR1089, ITU-T K.45
Safety Approvals	UL 497B

Overview

The PD-OUT-SP11 is a high quality surge protection device designed to protect indoor Ethernet networks from lighting that may come from outdoor environment through the Ethernet cable. The product is enclosed in a metal weatherproof enclosure, meeting IP66. It can be easily mounted on a wall or a pole. The SP device can be installed before the cable enters the building to protect the indoor network or immediately adjacent to the wall- or pole-mounted outdoor device (i.e. WLAN AP, IP Camera, etc).


PD-OUT/SP11 Features

- Supports data rates of up to 1Gbps
- Protects up to 10KV surge
- All eight lines protected including PoE
- Waterproof—IP66 rated
- UL Certified
- Can be wall or pole mounted

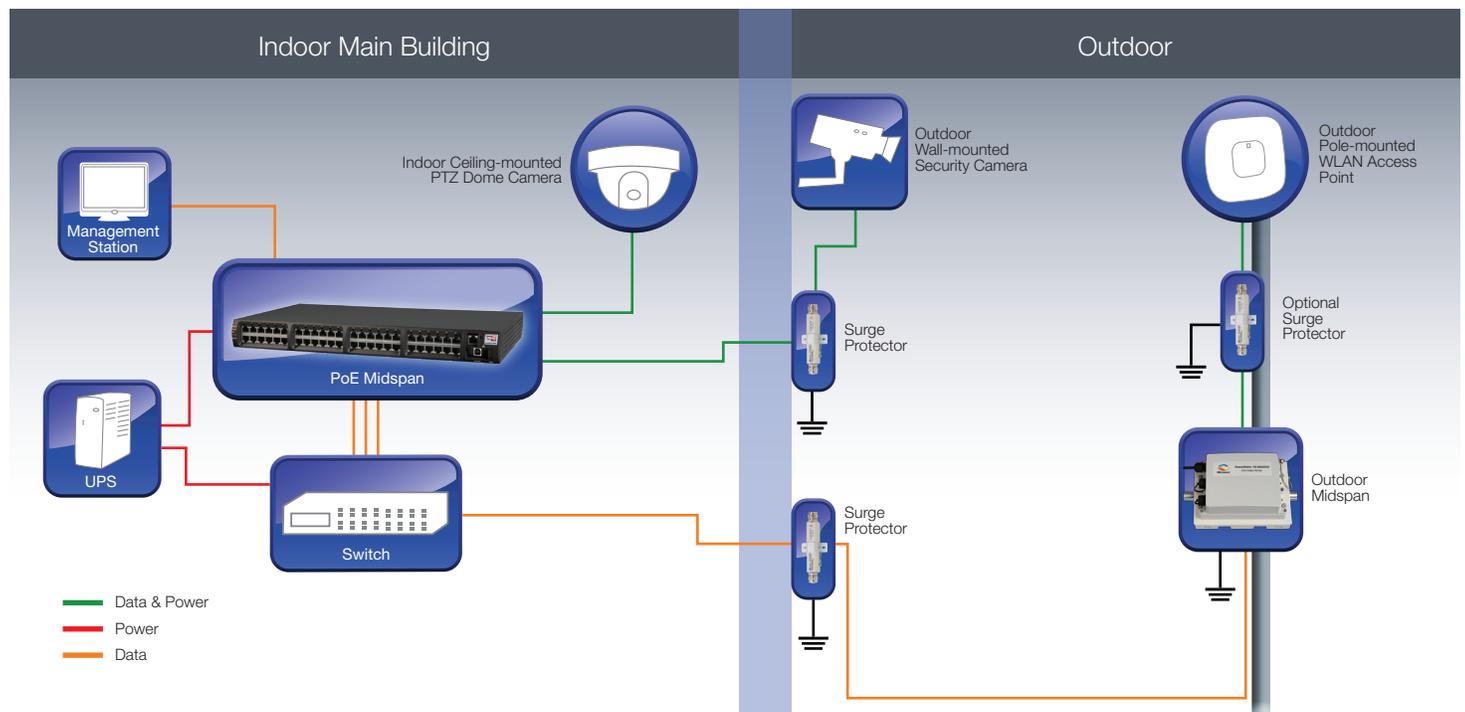

Ordering Information

Part Number	Name	Description
PD-OUT/SP11	PoE Surge Protector	Surge protector for Ethernet networks with outdoor PoE midspans and powered devices.

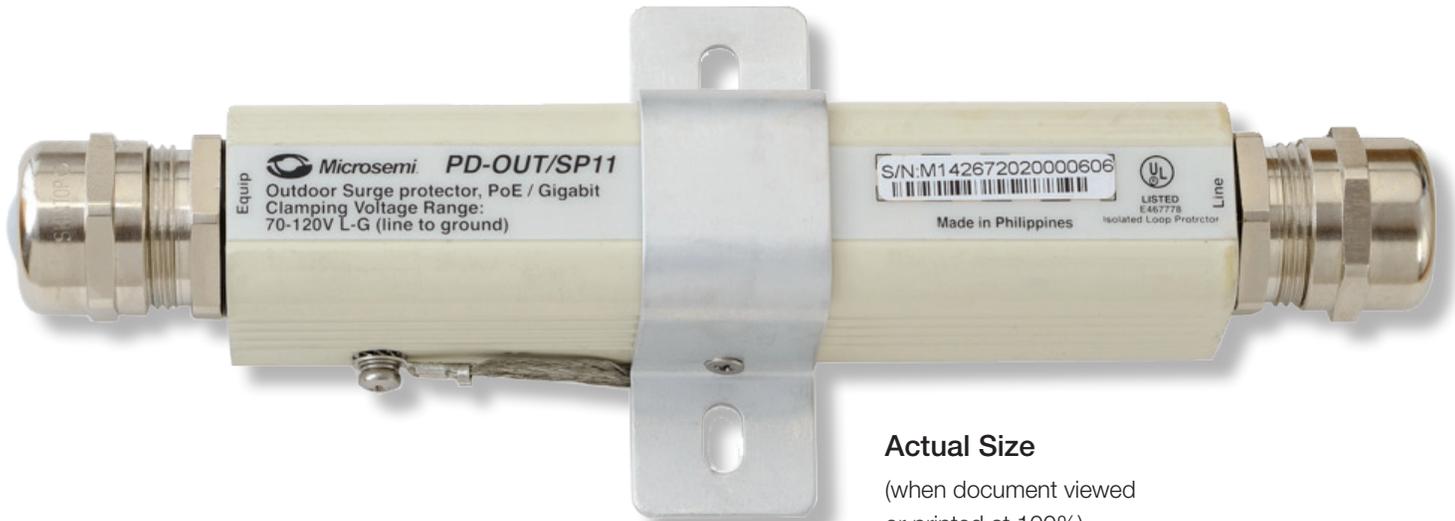

Actual Size
(when document viewed
or printed at 100%)

The information contained in the document (unless it is publicly available on the Web without access restrictions) is PROPRIETARY AND CONFIDENTIAL information of Microsemi and cannot be copied, published, uploaded, posted, transmitted, distributed or disclosed or used without the express duly signed written consent of Microsemi. If the recipient of this document has entered into a disclosure agreement with Microsemi, then the terms of such Agreement will also apply. This document and the information contained herein may not be modified, by any person other than authorized personnel of Microsemi. No license under any patent, copyright, trade secret or other intellectual property right is granted to or conferred upon you by disclosure or delivery of the information, either expressly, by implication, inducement, estoppels or otherwise. Any license under such intellectual property rights must be approved by Microsemi in writing signed by an officer of Microsemi.

Microsemi reserves the right to change the configuration, functionality and performance of its products at anytime without any notice. This product has been subject to limited testing and should not be used in conjunction with life-support or other mission-critical equipment or applications. Microsemi assumes no liability whatsoever, and Microsemi disclaims any express or implied warranty, relating to sale and/or use of Microsemi products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right. Any performance specifications believed to be reliable but are not verified and customer or user must conduct and complete all performance and other testing of this product as well as any user or customers final application. User or customer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the customer's and user's responsibility to independently determine suitability of any Microsemi product and to test and verify the same. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the User. Microsemi specifically disclaims any liability of any kind including for consequential, incidental and punitive damages as well as lost profit. The product is subject to other terms and conditions which can be located on the web at <http://www.microsemi.com/legal/tnc.asp>



Microsemi Corporate Headquarters
One Enterprise, Aliso Viejo, CA 92656 USA
Within the USA: +1 (800) 713-4113
Outside the USA: +1 (949) 380-6100
Sales: +1 (949) 380-6136
Fax: +1 (949) 215-4996
email: sales.support@microsemi.com
www.microsemi.com

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for communications, defense & security, aerospace and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; security technologies and scalable anti-tamper products; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, Calif., and has approximately 3,400 employees globally. Learn more at www.microsemi.com.

©2014 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

MSC-PD-OUT/SP11 7.14

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Surge Suppressors](#) category:

Click to view products by [Microchip](#) manufacturer:

Other Similar products are found below :

[GUS1](#) [GUS12](#) [BSPM1A600D600LVR](#) [29-2053](#) [GUS11](#) [GUS2](#) [GUS3](#) [GUS4](#) [30460](#) [SRA64C060X](#) [PC642C015](#) [1810-15-A3](#) [2713175](#)
[4B06B-EC1-150LF](#) [SRA6LC](#) [BPMA75D100LV](#) [CX06M](#) [CCTV1](#) [GUS13](#) [GUS14](#) [GUS5](#) [GUS6](#) [VAL-MS 320/3+0-FM](#) [VAL-US-](#)
[120/40/1+1-FM](#) [VAL-US-120/65/1+1-FM](#) [VAL-US-480D/30/3+0-FM](#) [VAL-US-120/40/1+0-FM](#) [LP-GTR-NFF](#) [LP-STRL-NFF](#) [LP-STRL-](#)
[DFF](#) [GUS22](#) [0804111](#) [5053609](#) [5053201](#) [SPD2-150-1P0](#) [SPD2-550-1P0](#) [6720005416](#) [6720005417](#) [1-2191595-2](#) [STC-CAT6-P0E-I](#) [SPD2-](#)
[350-1P0](#) [FLT-CP-350-ST](#) [TTC-6P-3-HF-F-M-12DC-UT-I](#) [SMTPA200](#) [2800989](#) [2906776](#) [2906810](#) [2906847](#) [2906848](#) [2906851](#)